




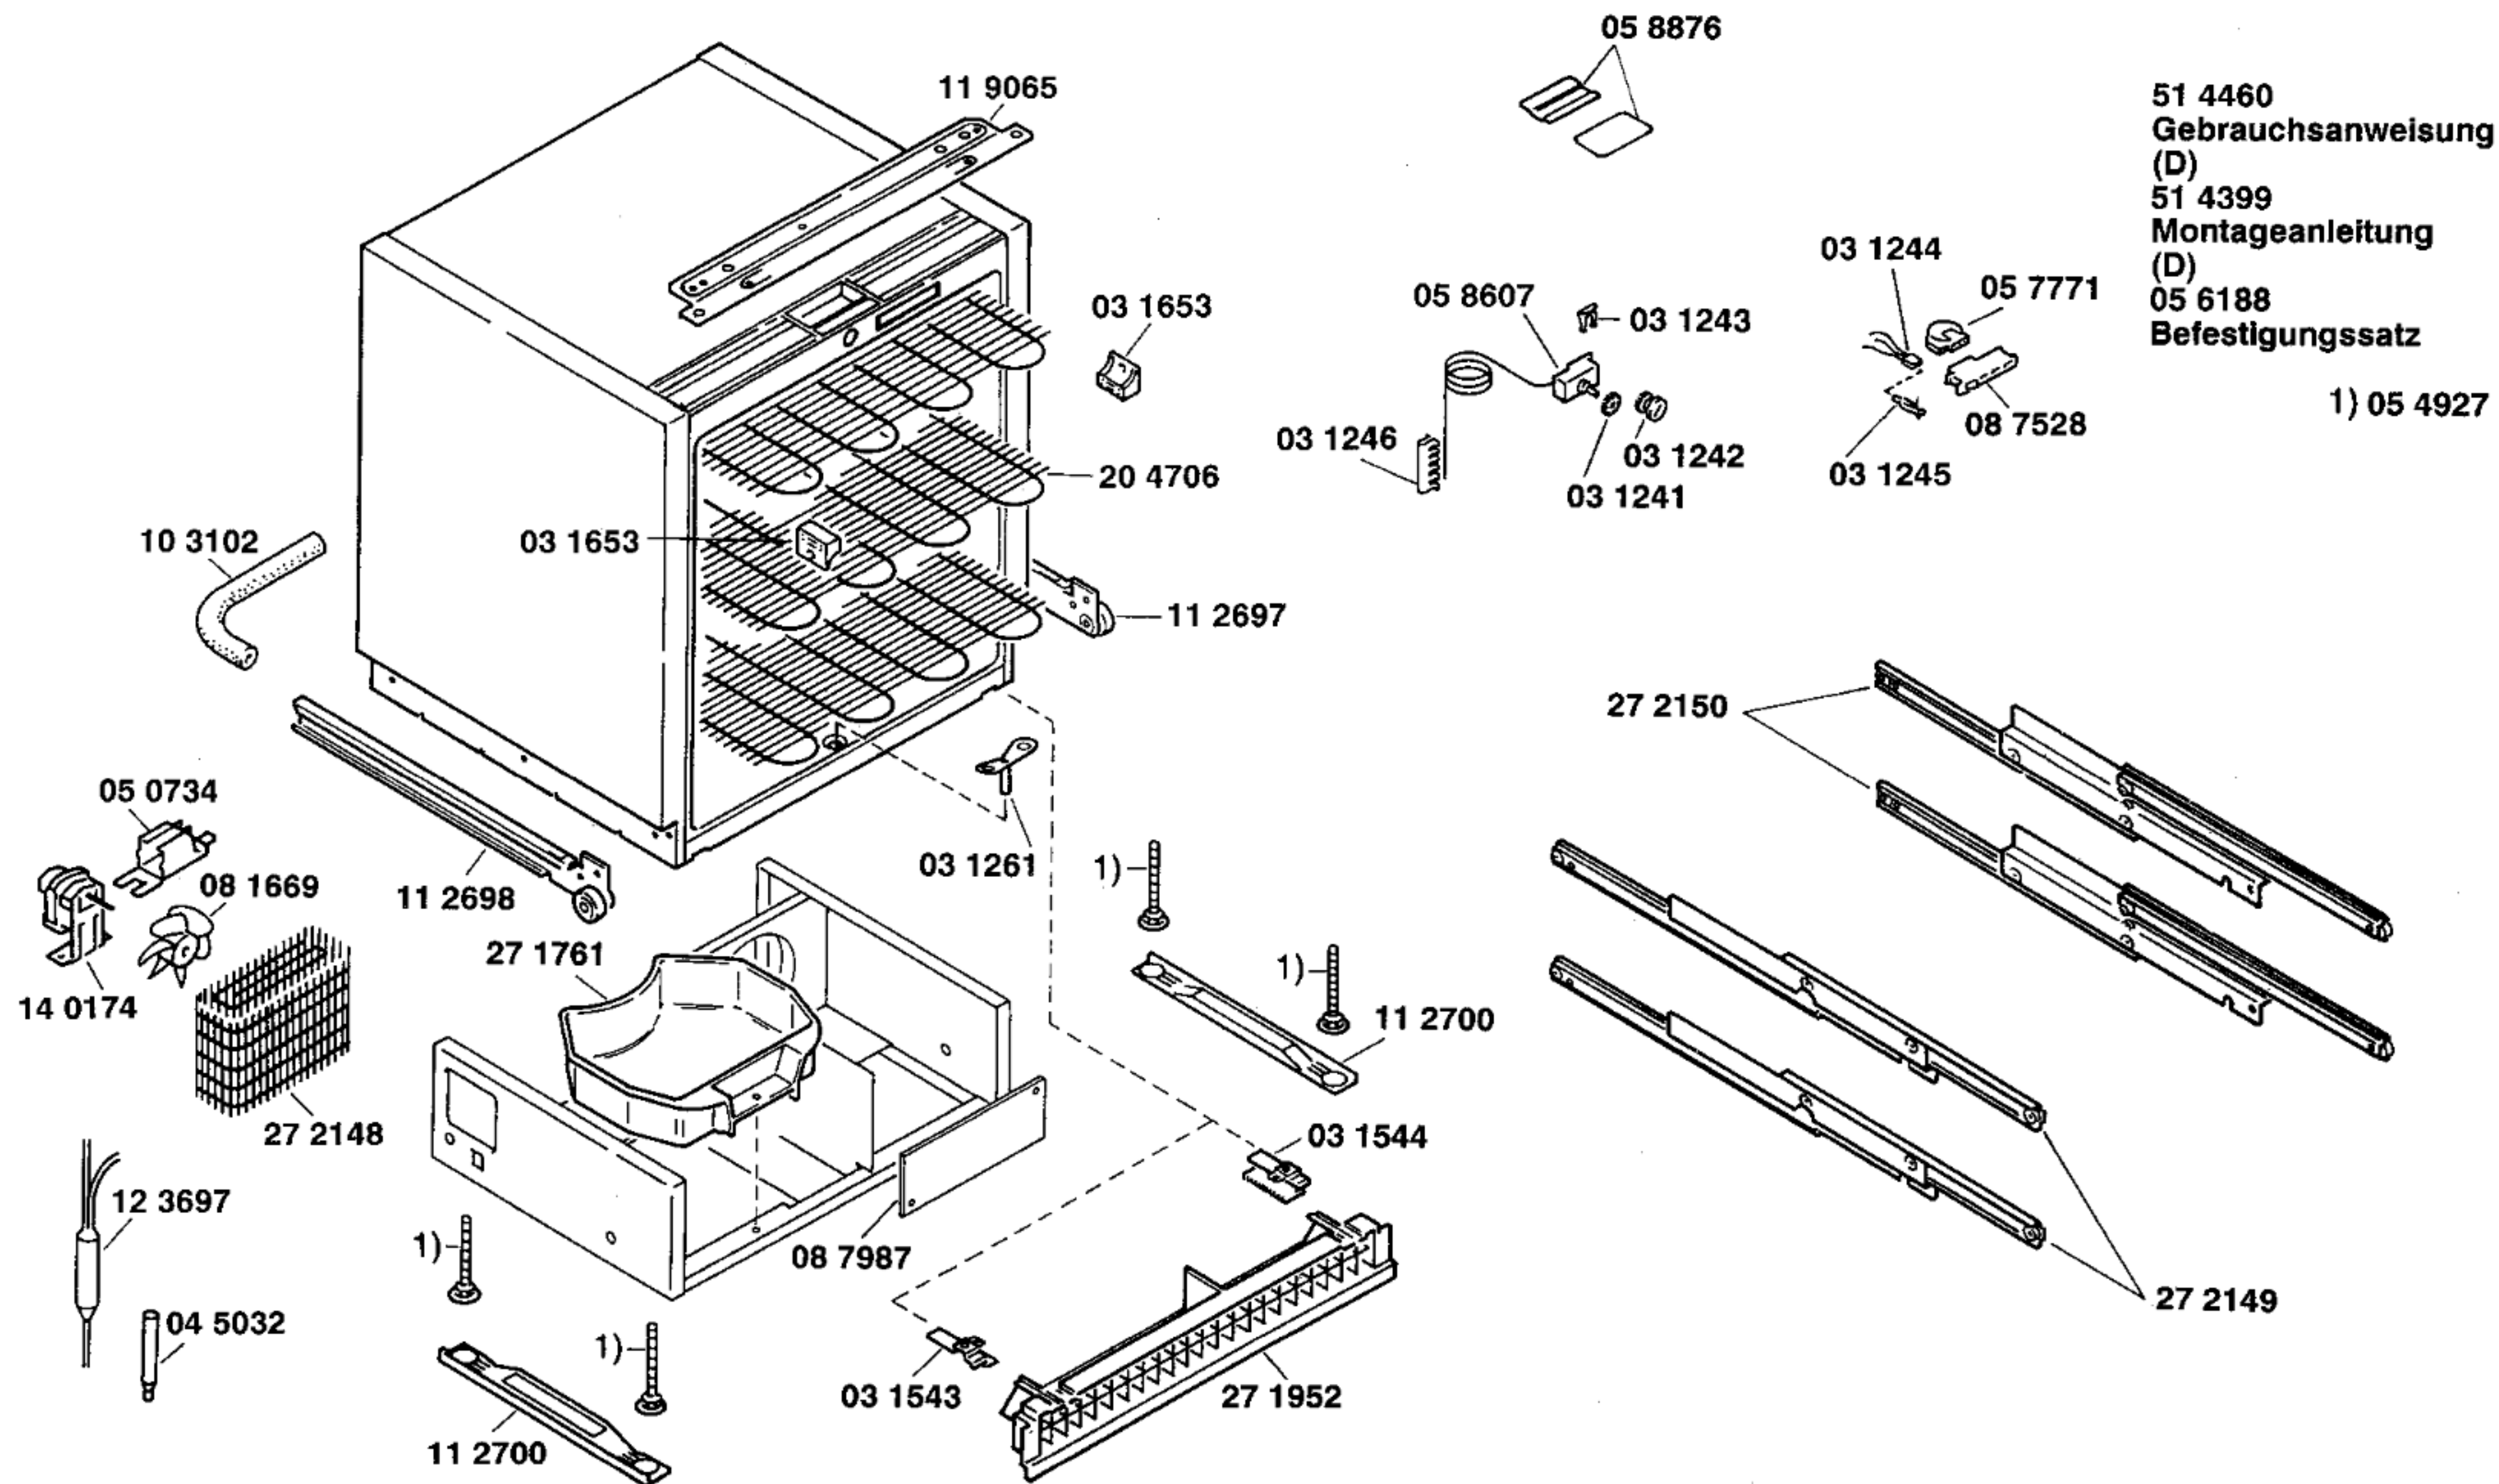

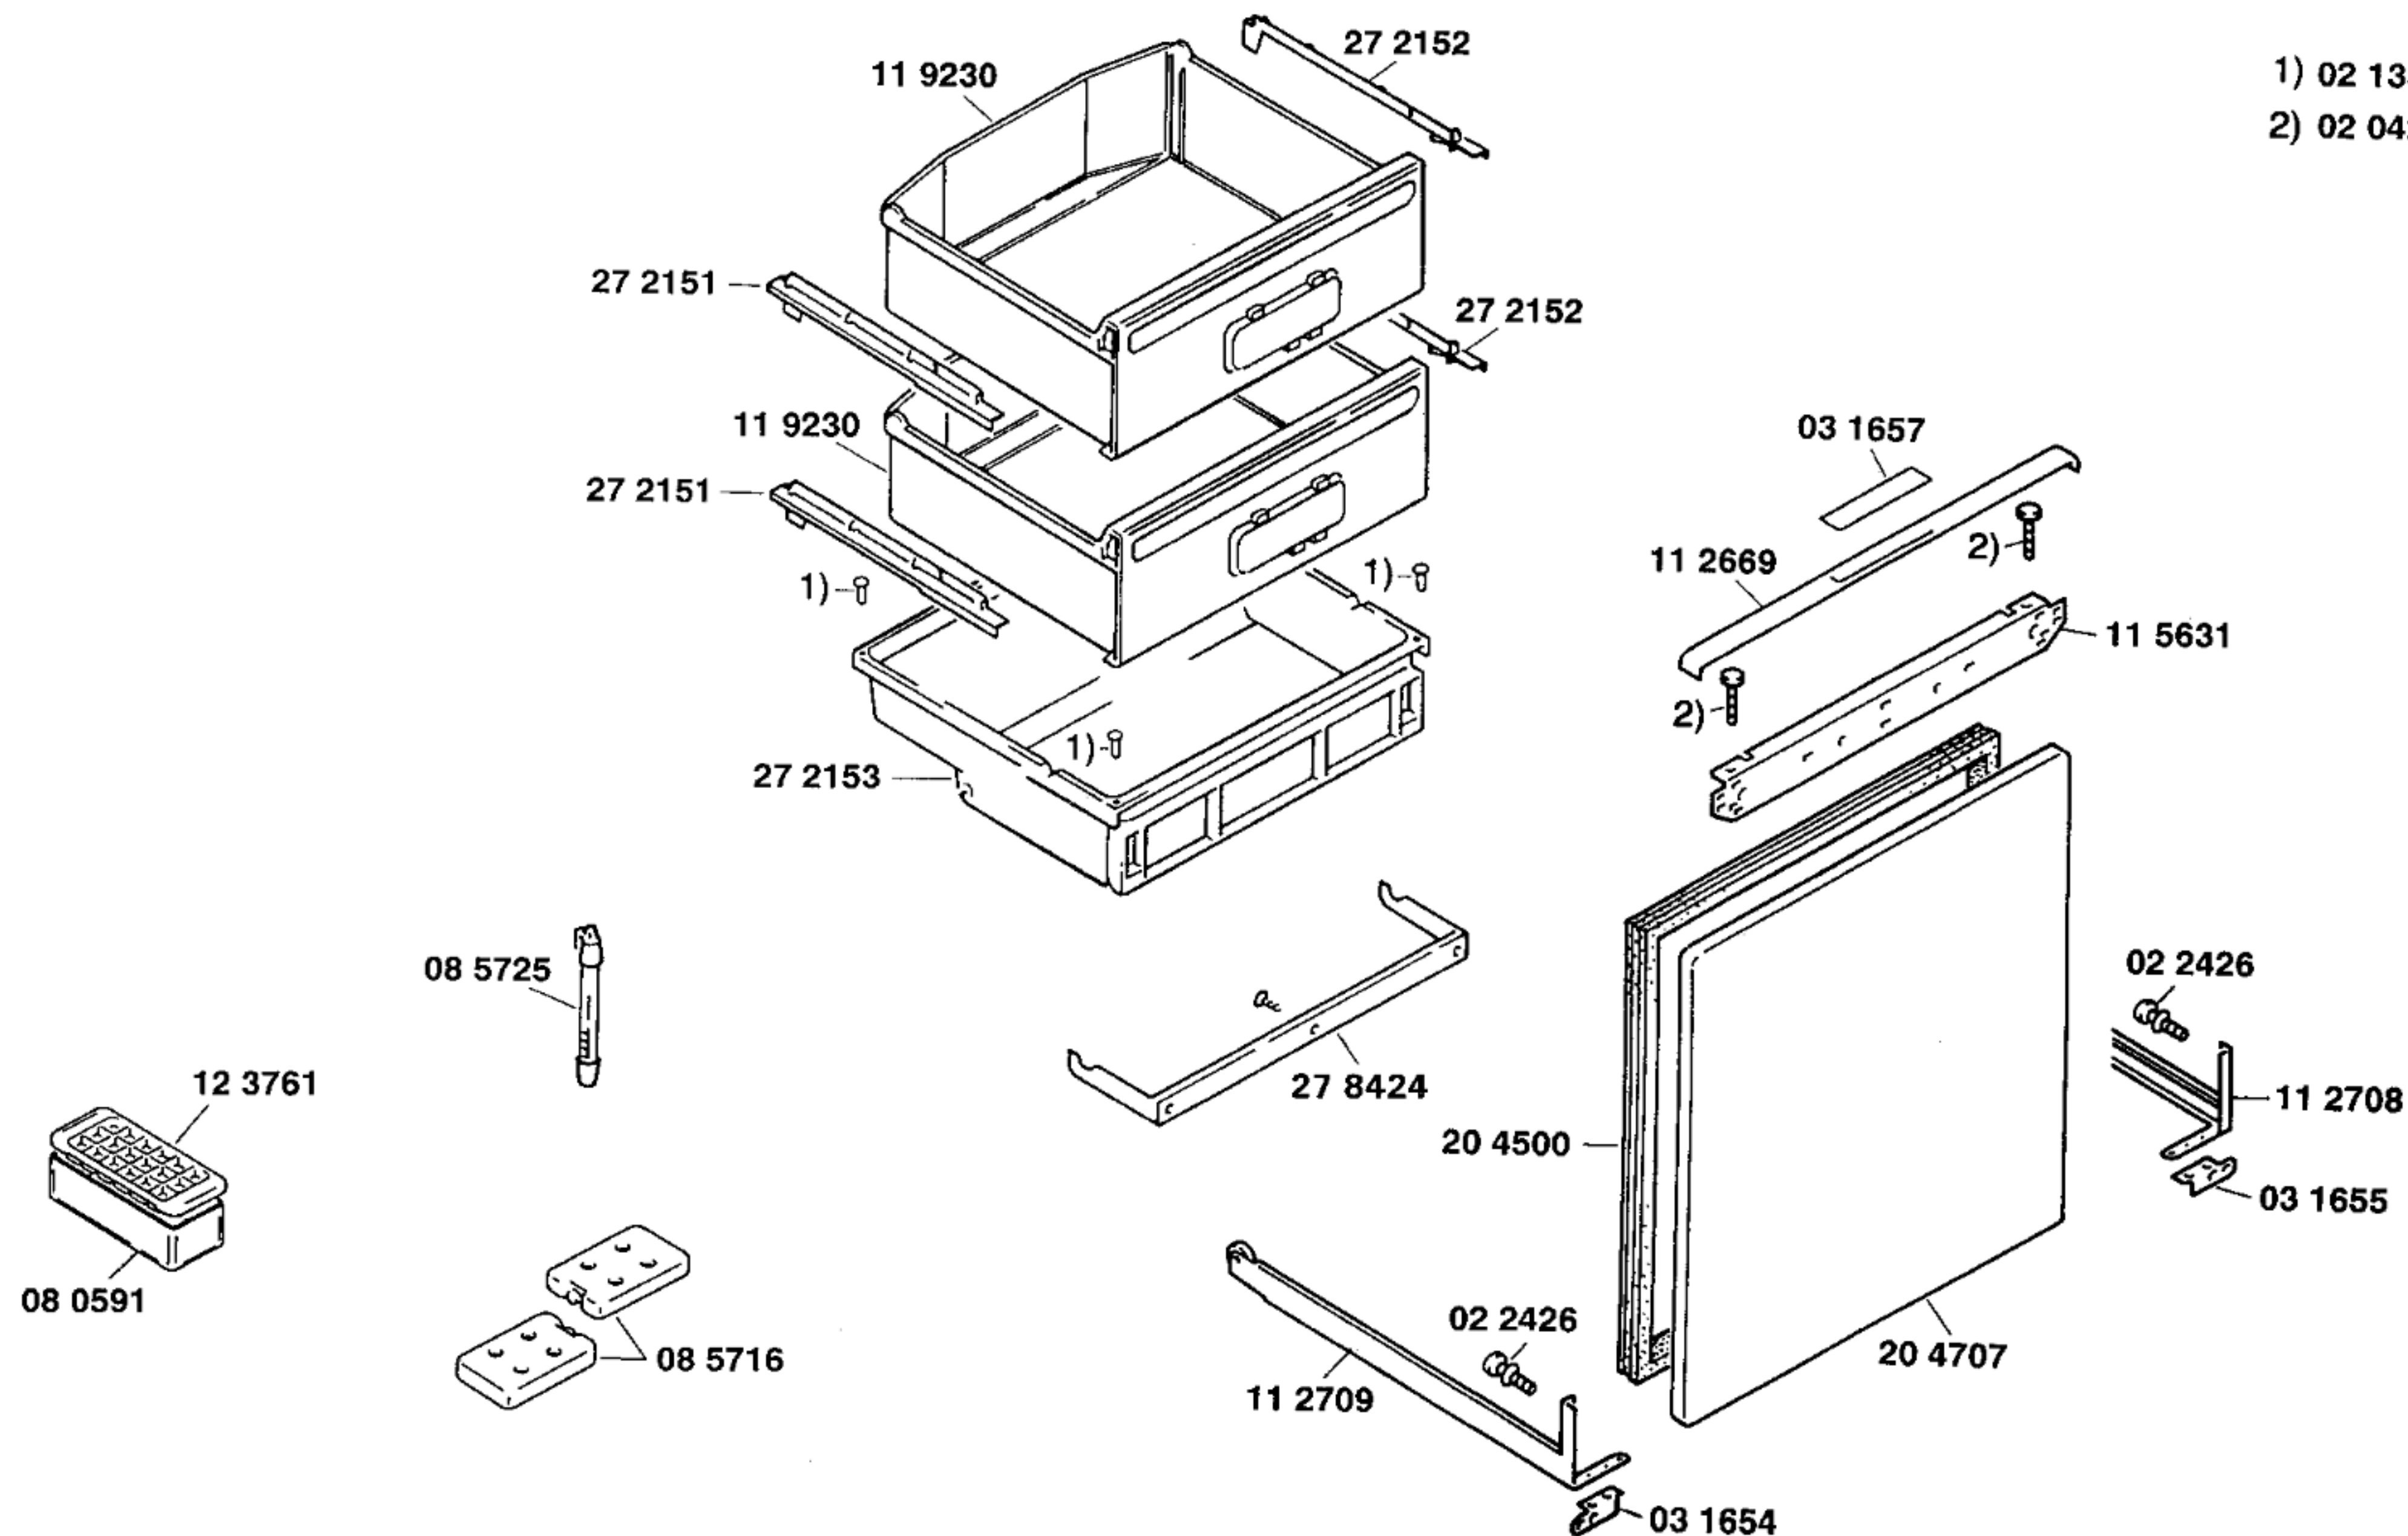

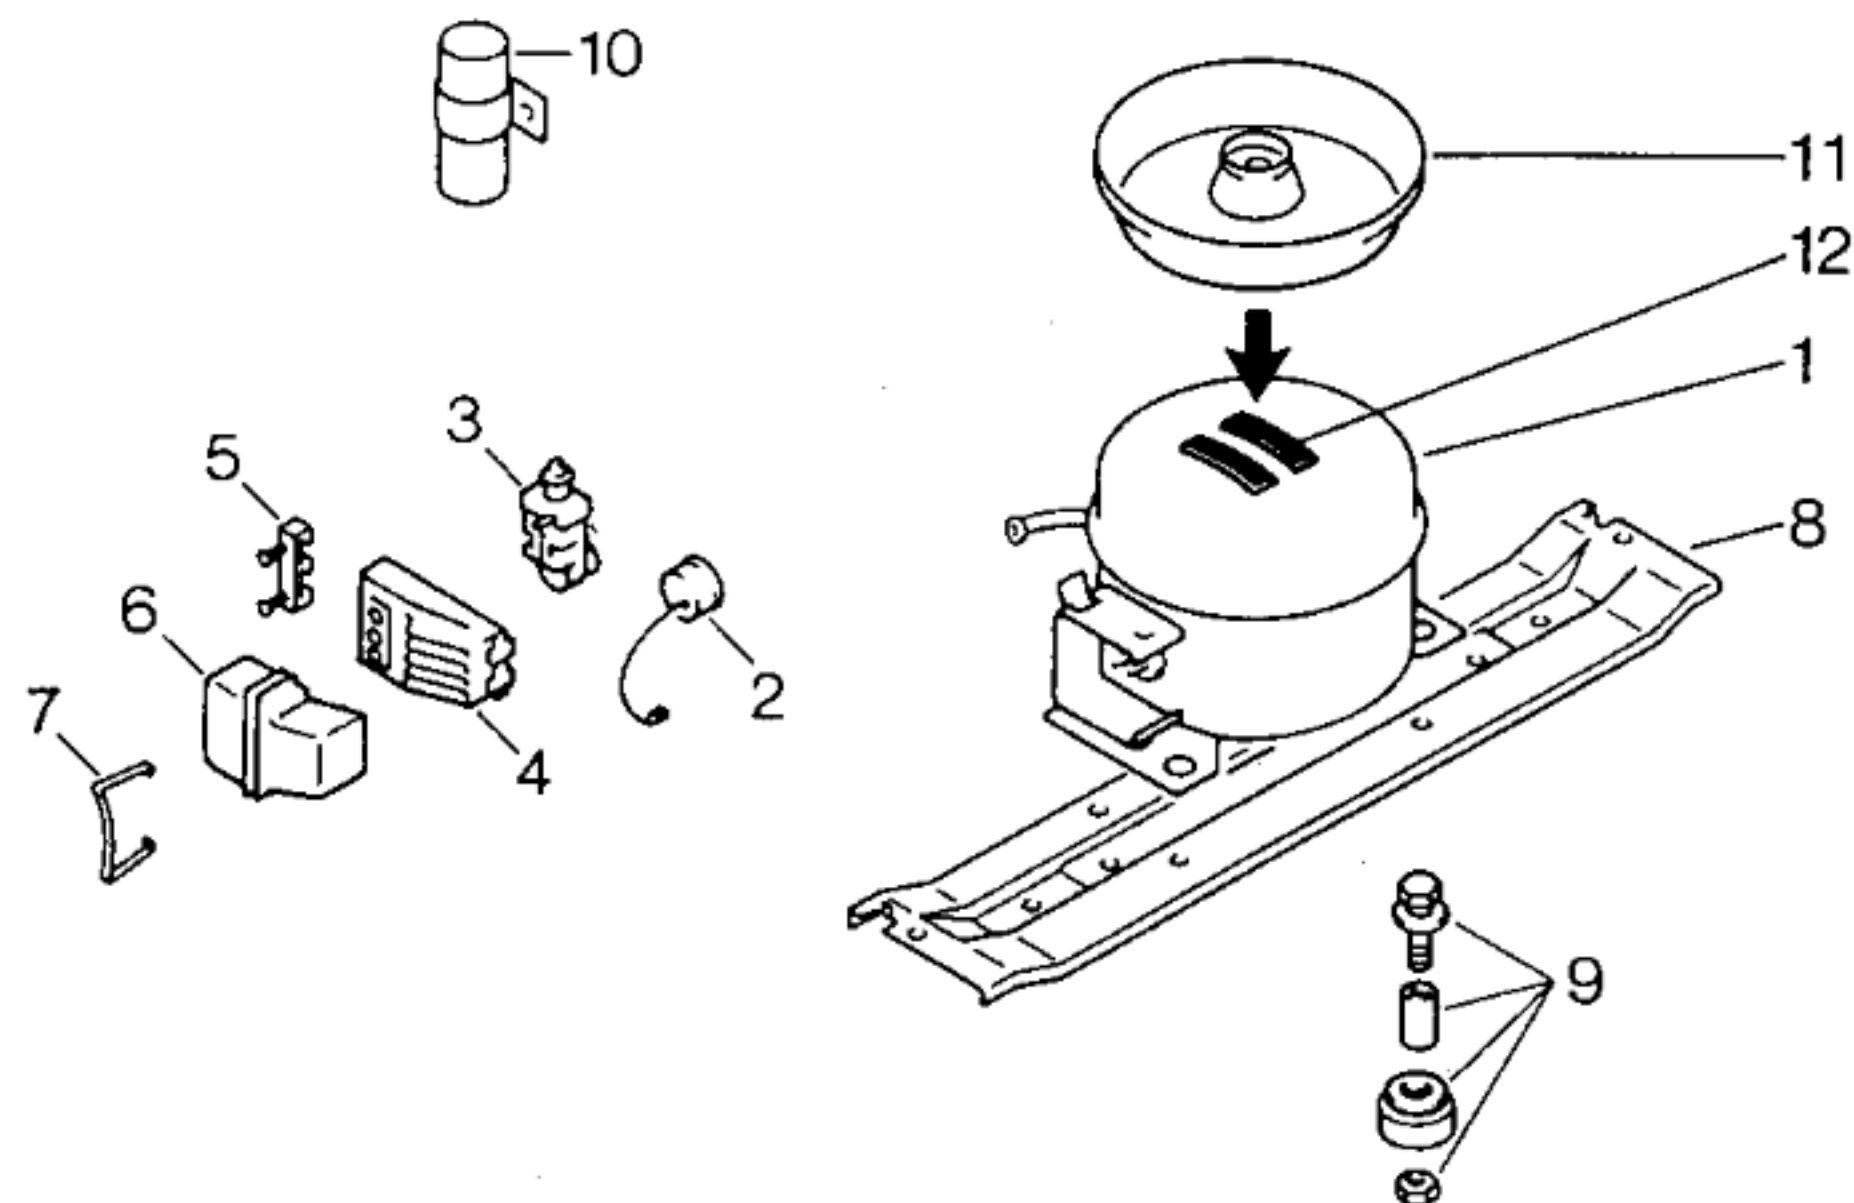

Pos.	EU1,CH1,SF1	EU2,CH2,SF2	EU3,CH3,SF3
	Aspera	Matsushita	Danfoss
	BP1111A	S111LKAA	TL5A
1	14 0516	14 0571	14 0065
2	03 1238		
3	02 7424	03 2034	02 0108
4			
5	02 7425		02 7310
6	05 5145	05 8457	05 1413
7		02 6731	
8			
9	05 0166	05 0166	05 0166
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Aspera	Matsushita	Danfoss
Typ/Type		BP 1111 A	S111LKAA	TL 5 A
Förderleistung/Delivery/Débit		1031	873	914
Anlaufstrom/Starting current/Cour. de démarrage		A 8,4	6,9	9,0
Widerstand/Resistance/Résistance		Ha/main/prin. Ω 18,3	14,3	15,5
		Hi/aux Ω 37,9	34,1	16,8
Temp.-Regler/Thermostat		WHF		
Typ/Type		TF 57 SF 2		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$ -25 -17		
Valeurs de commutation		„aus“ -33 -23		
		(„abtauen“ od.) „alarm“ -19,5 -13		
Füllmenge/Fill.quantity/Charge		R12 g 170		
Anschlußwert/Conn.load/Puiss. connectée		W 120		
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		