



Zubehör:

Dekorrahmen
KZ10170,Alu
KZ10190,weiss

Sockel
KZ11120

51 3614
Gebrauchsanweisung
(D,GB,F,I,NL,S,SF,E,P,DK,N)
51 3592
Montageanweisung
(D,GB,F,I,NL,S,SF,E,P,DK,N)

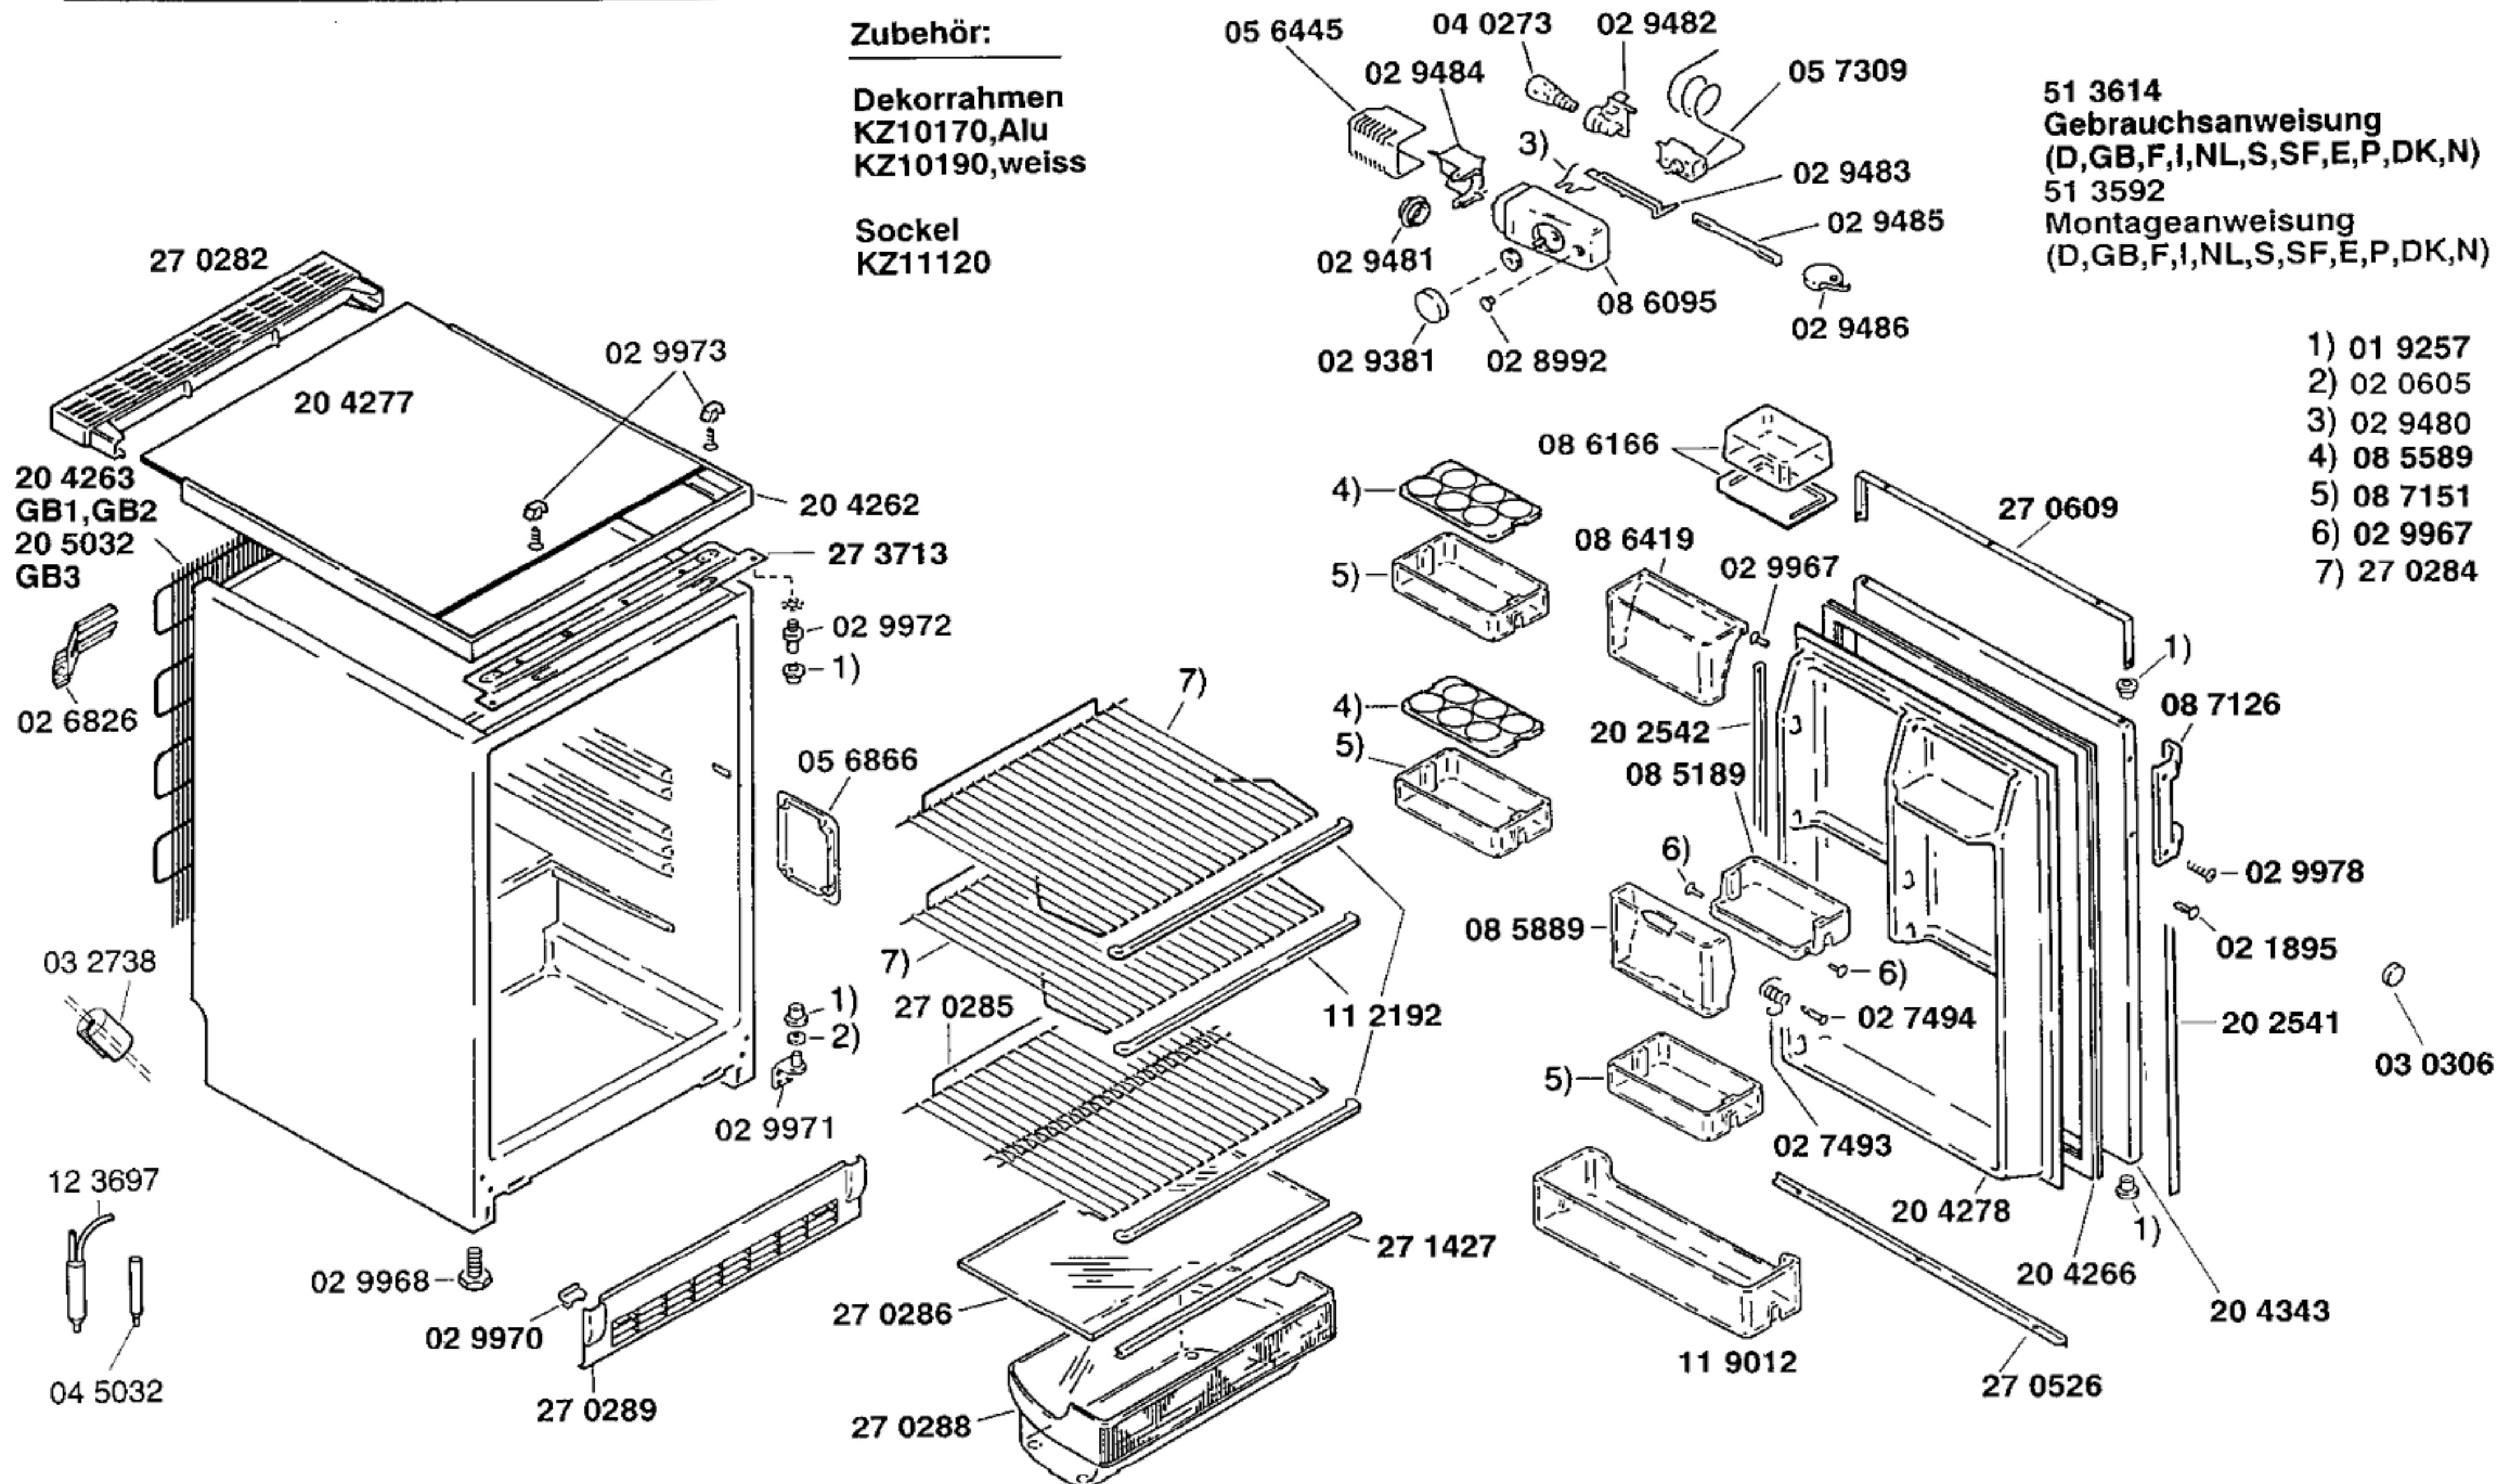

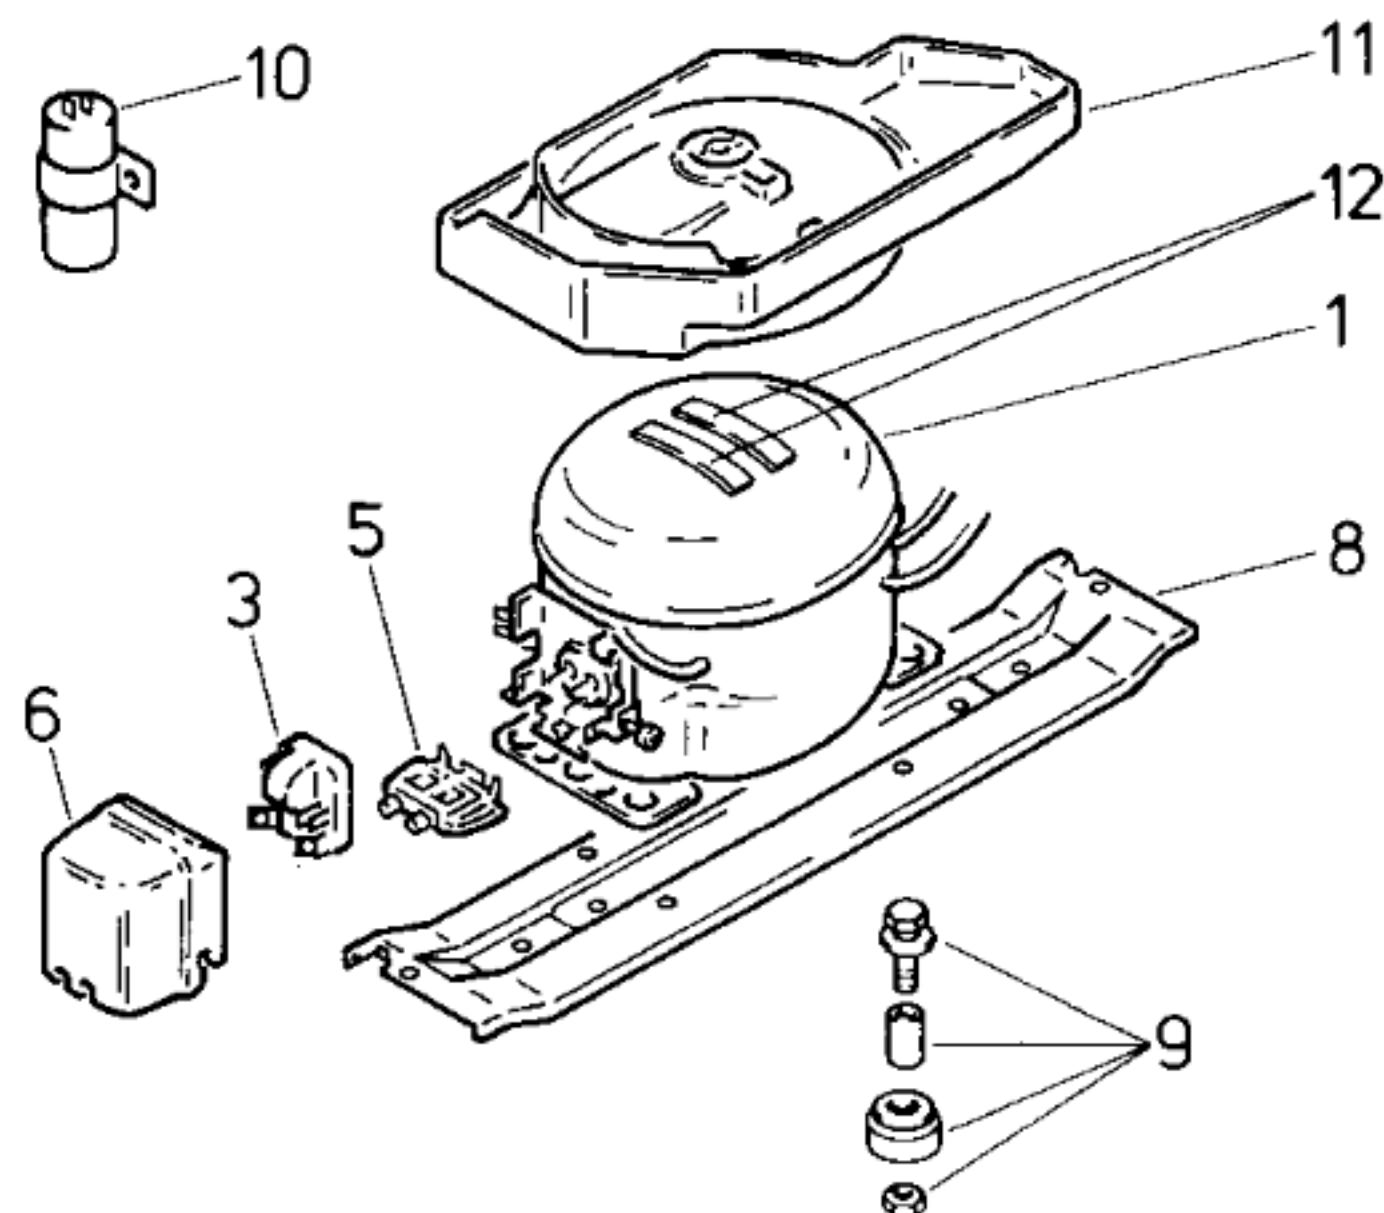

Pos.	GB1,GB2	GB3	
	Danfoss	Matsushita	
	TL 4 A	S075LKAA	
1	13 1064	14 0599	
2			
3	02 0108	03 2034	
4			
5	02 7310		
6	05 1413	05 8457	
7			
8	27 0291	27 0291	
9	05 0166	05 0166	
10			
11	08 4744	08 8893	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss	Matsushita	
Typ/Type		TL 4 A	S075LKAA	
Förderleistung/Delivery/Débit		l/h	695	641
Anlaufstrom/Starting current/Cour. de démarrage		A	8,3	5,7
Widerstand/Resistance/Résistance		Ha/main/prin.	Ω	23,4
		Hi/aux	Ω	15,5
Temp.-Regler/Thermostat		WHF		
Typ/Type		TF 57 F1		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/		„ein“	+ 5,0	+ 5,0
Valeurs de commutation		„aus“	- 27,0	- 12,0
		(„abtauen“ od.)	„alarm“	
Füllmenge/Fill.quantity/Charge		R12	g	65
Anschlußwert/Conn.load/Puiss. connectée		W	110	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Resistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		