


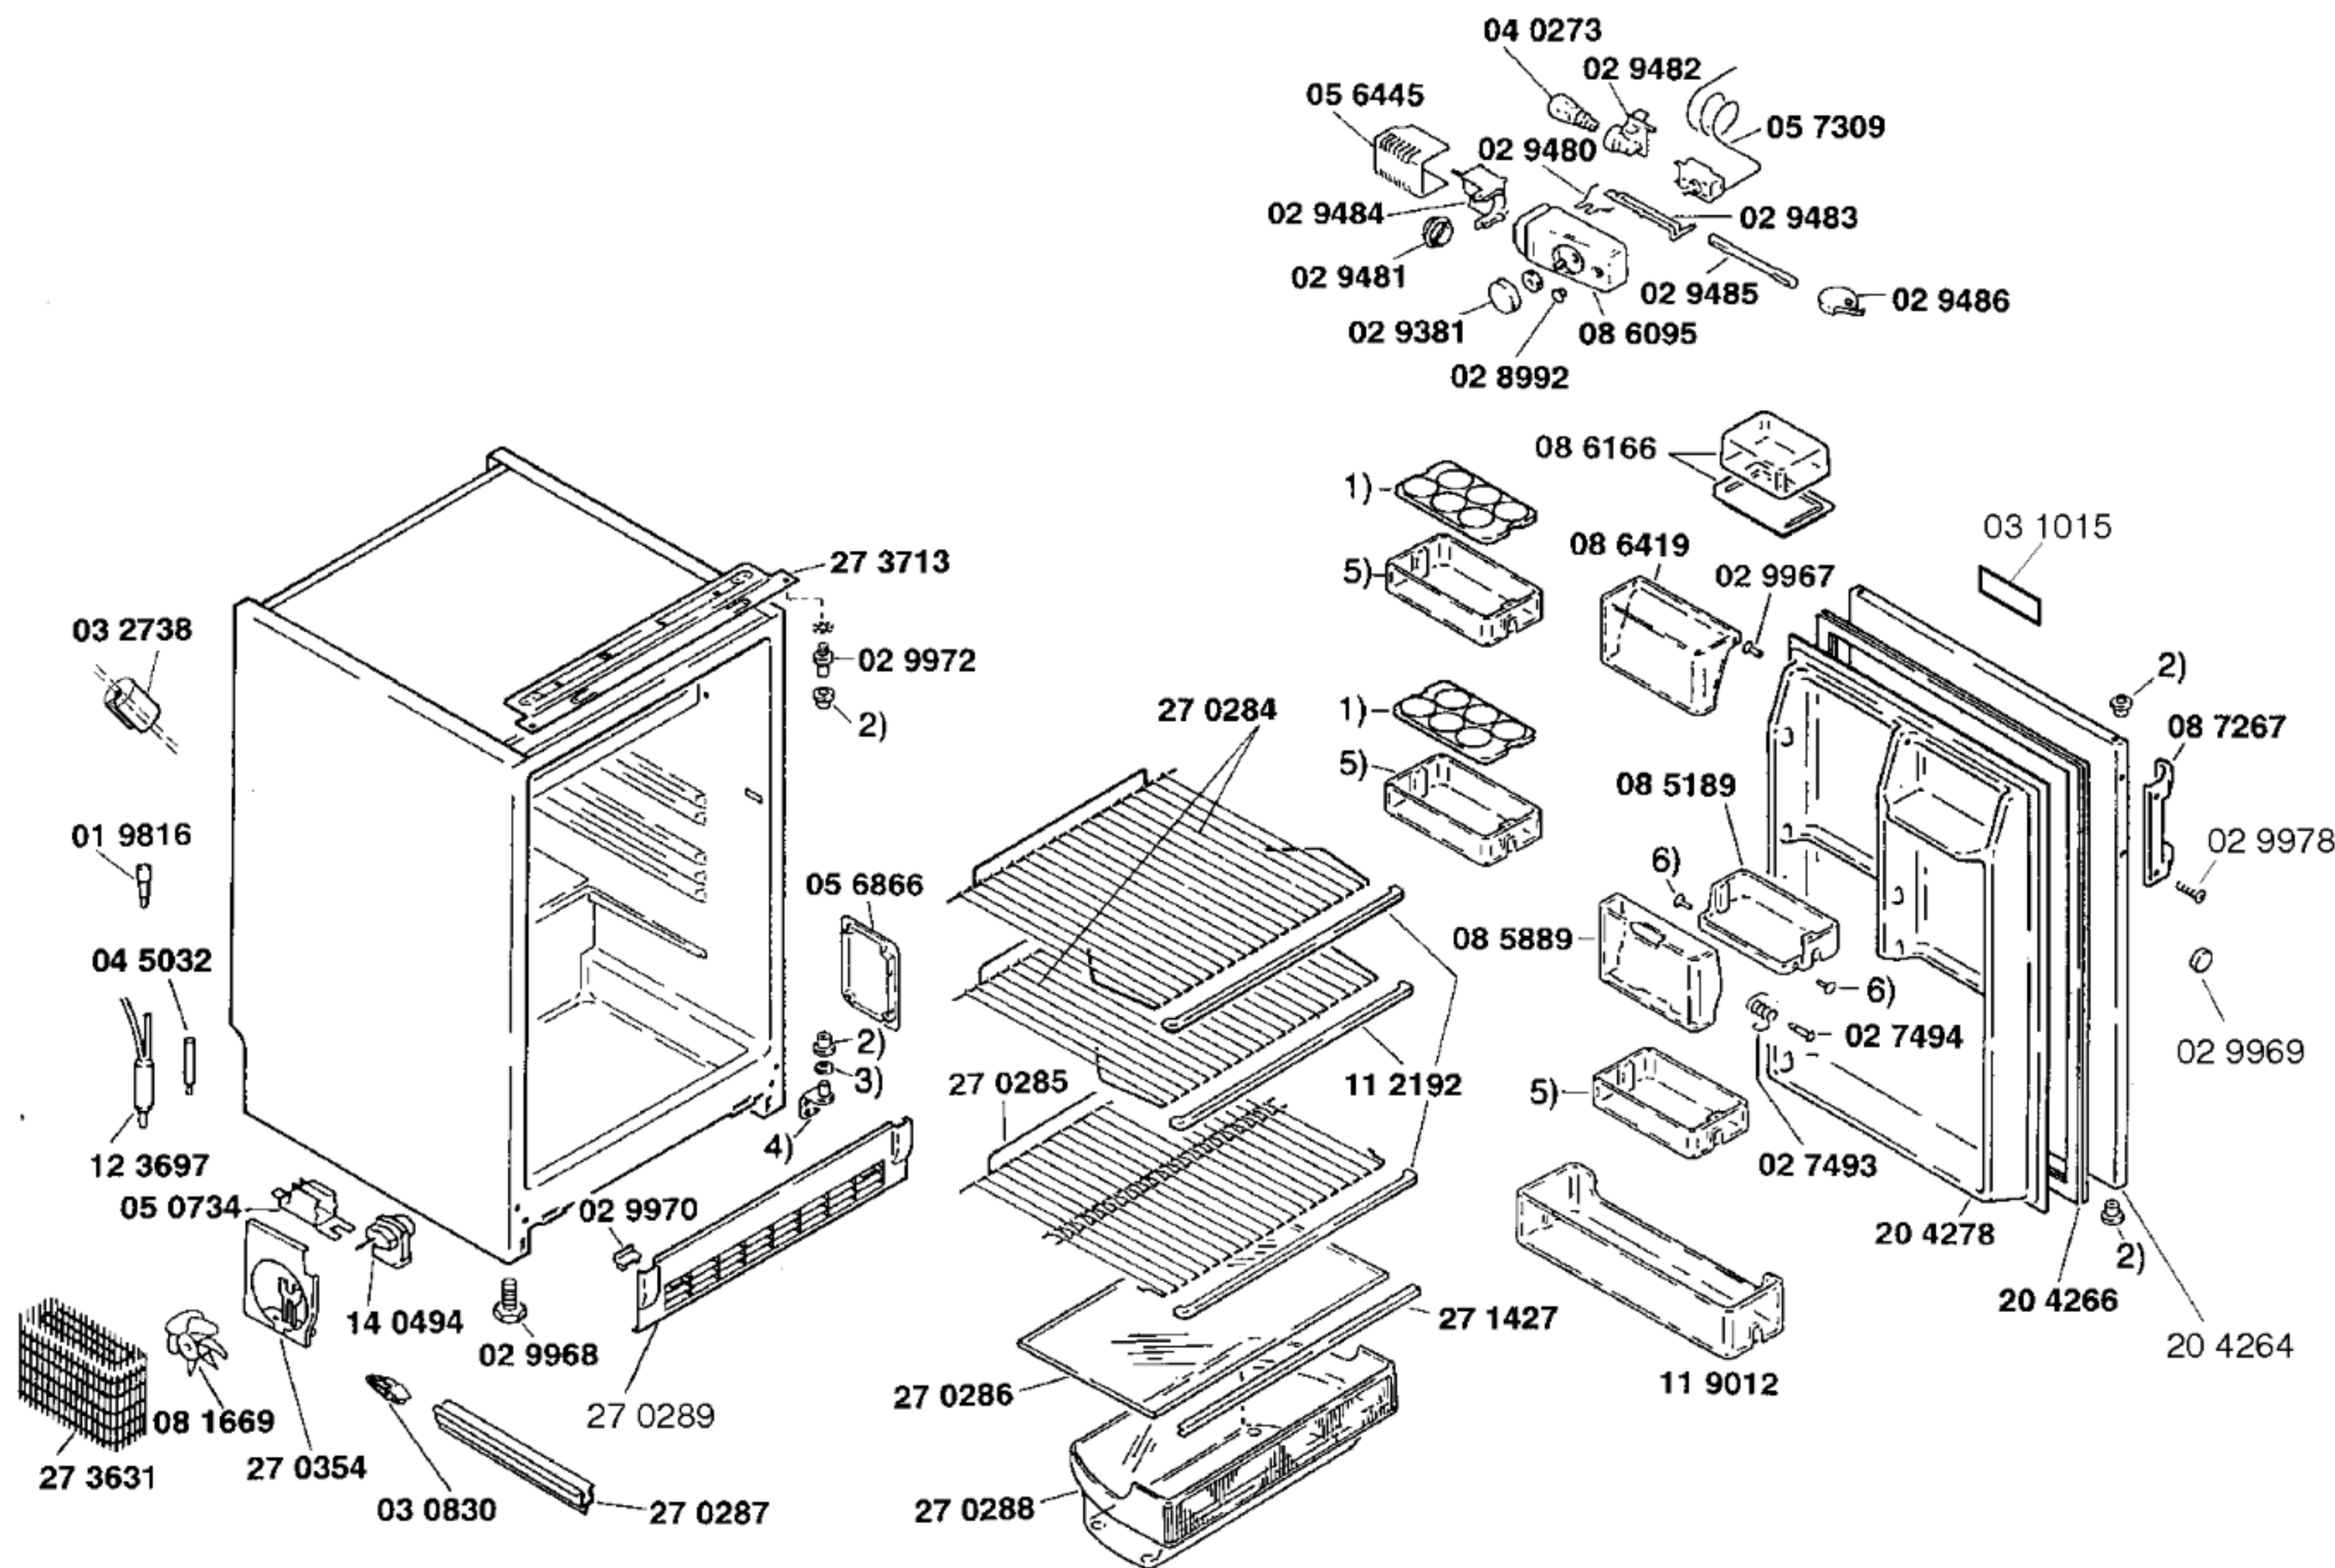


51 3591
Gebrauchsanweisung
(D,GB,F,I,NL,S,SF,E,P,
DK,N)
51 4009
Montageanweisung
(D,GB,F,I,NL,S,SF,E,P,
DK,N)

- 1) 08 5589
- 2) 01 9257
- 3) 02 0605
- 4) 02 9971
- 5) 08 7151
- 6) 02 9967

Zubehör:

Dekorrahmen
KZ10160, braun
KZ10170, Aluminium
KZ10180, weiss

Sockel
KZ11120

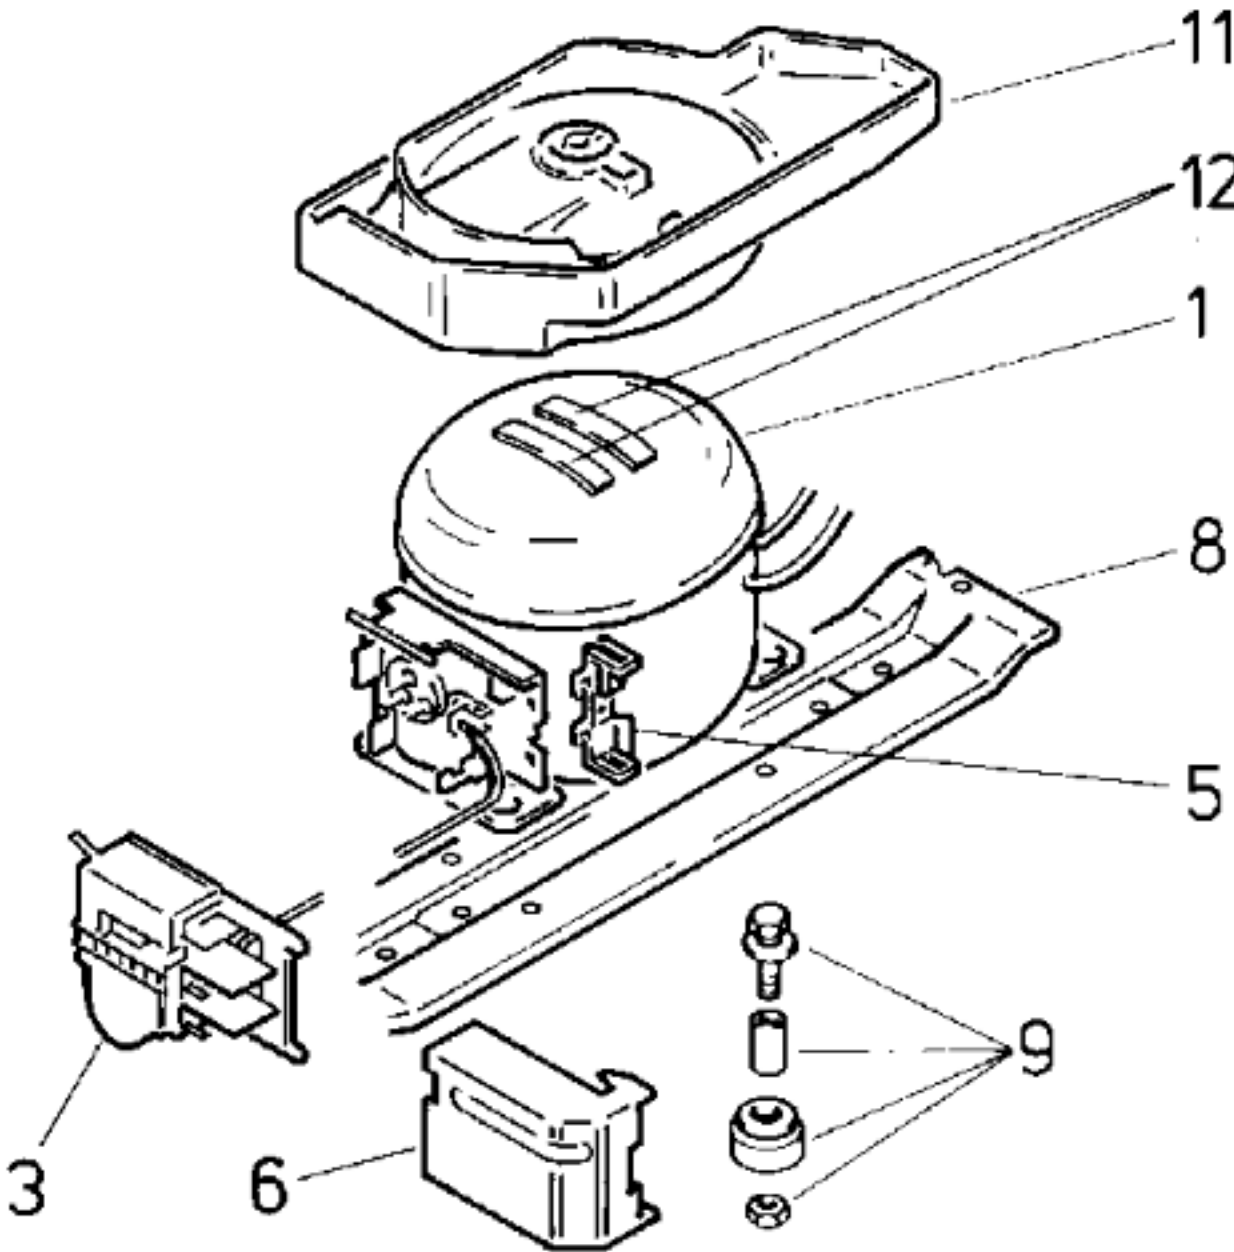

Pos.	EU1		EU2
	Danfoss		Matsushita
	TL 4 A		S075LKAA
1	13 1064		14 0599
2			
3	02 0108		03 2034
4			
5	02 7310		
6	05 1413		05 8457
7			
8	27 0291		27 0291
9	05 0166		05 0166
10			
11	08 4744		08 8893
12	05 6008		05 6008

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES					
Verdichter/Compressor/Compresseur		Danfoss		Matsushita	
Typ/Type		TL 4 A		S075LKAA	
Förderleistung/Delivery/Débit		l/h	695	641	
Anlaufstrom/Starting current/Cour. de démarrage		A	8,3	5,7	
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	23,4	24,4	
		Hi/aux Ω	15,5	39,8	
Temp.-Regler/Thermostat		WHF			
Typ/Type		TF 57 F1			
Reglerstellung/Position			kalt	warm	
Schaltwerte/Switching values/ Valeurs de commutation		„ein“ $^{\circ}\text{C}$	+ 5,0	+ 5,0	
		„aus“ („abtauen“ od.) „alarm“	- 27,0	- 12,0	
Füllmenge/Fill.quantity/Charge		R12	g	70	
Anschlußwert/Conn.load/Puiss. connectée		W	110		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Resistance		Ω			
Leistung/Power/Puissance		W			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			