



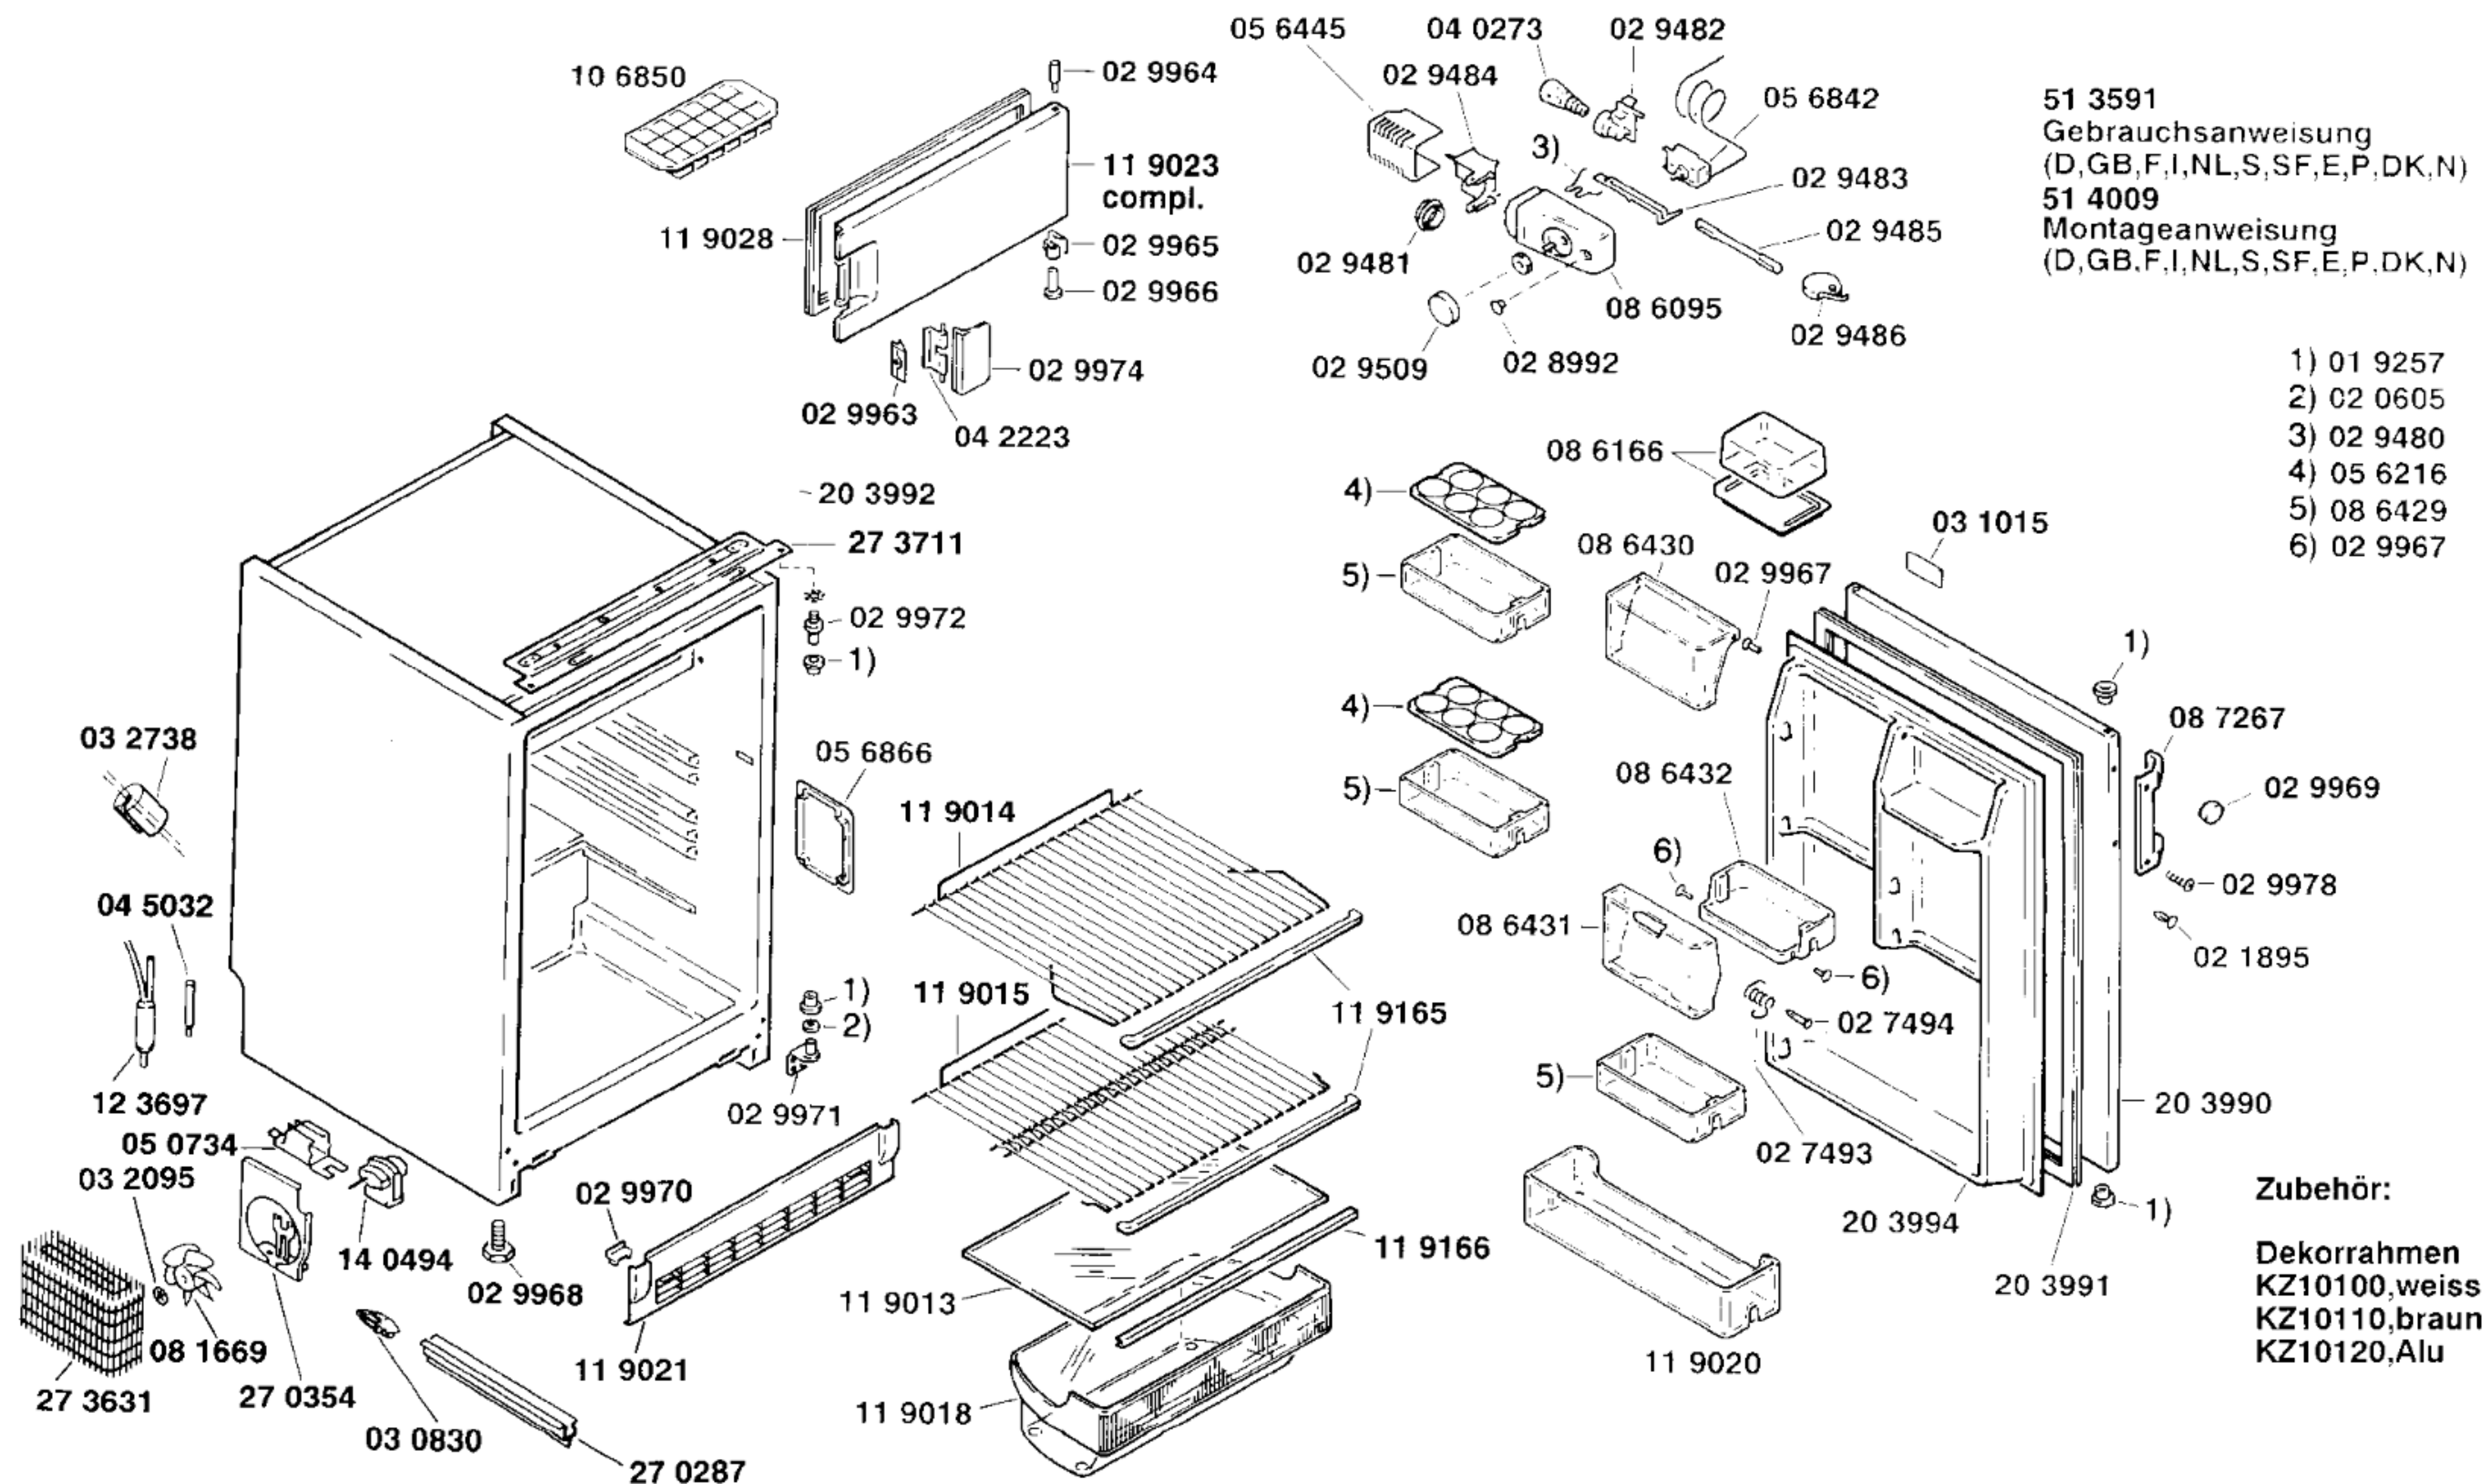

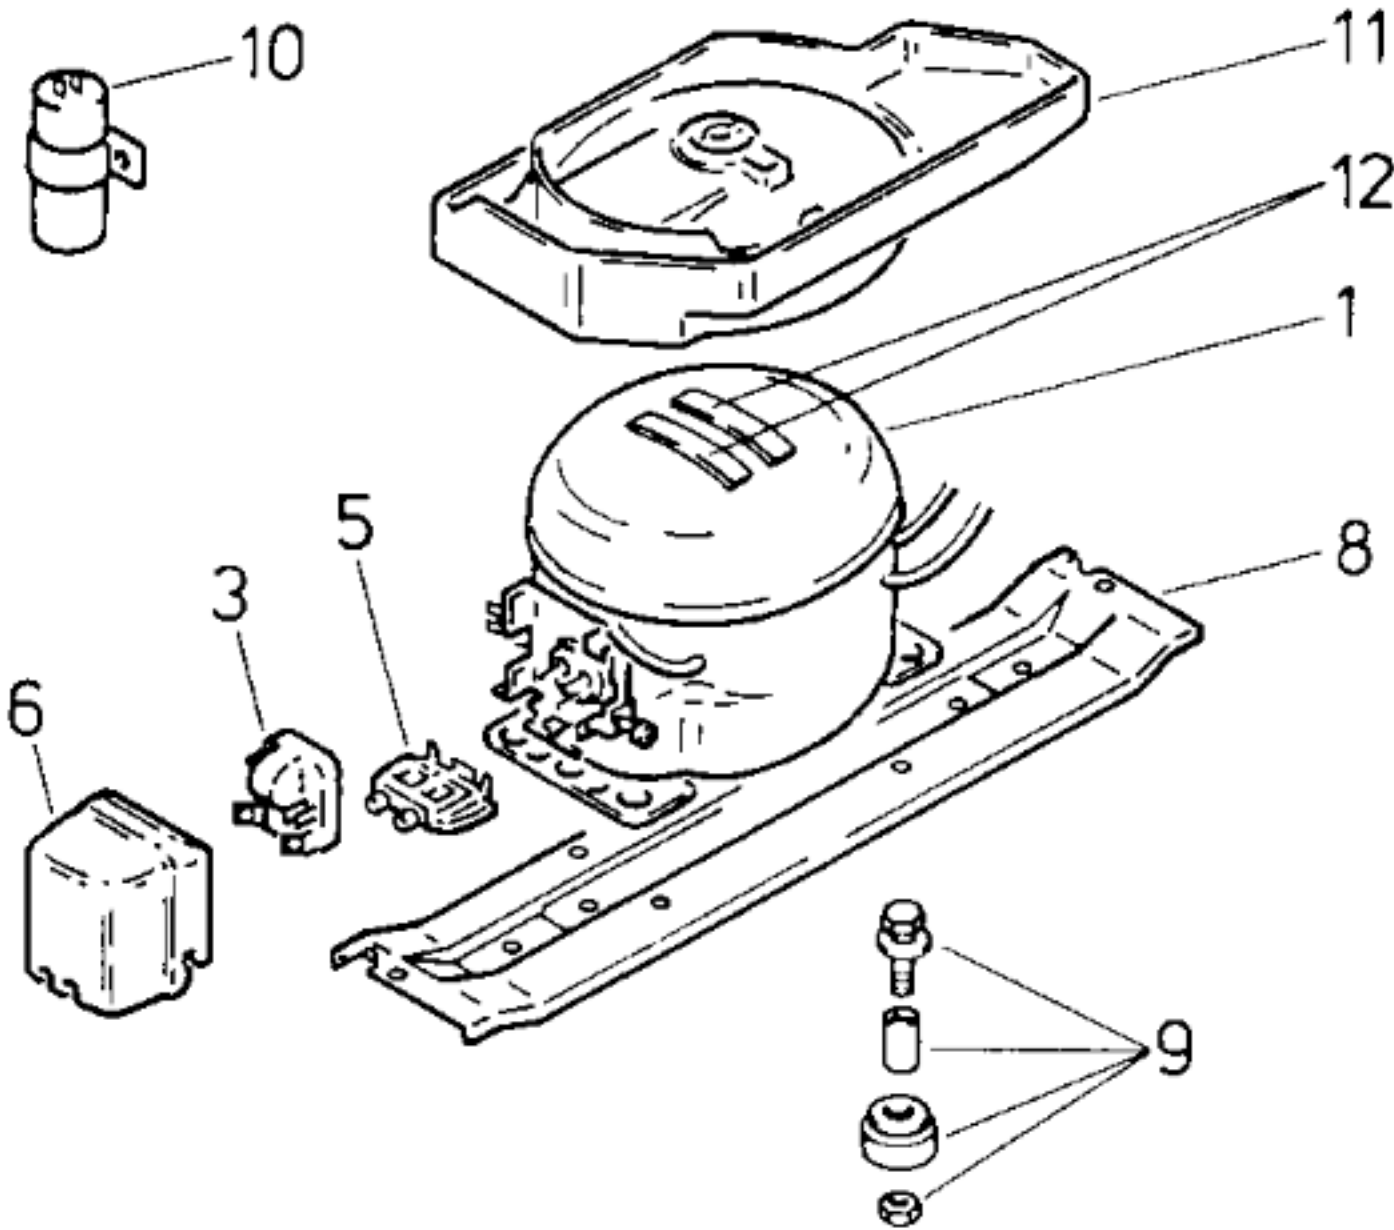

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur				Matsushita
Typ/Type				S075LKAA
Forderleistung/Delivery/Débit		l/h		641
Anlaufstrom/Starting current/Cour. de démarrage		A		5,7
Widerstand/Resistance/Résistance		Ha/main/prin.	Ω	24,4
		Hi/aux	Ω	39,8
Temp.-Regler/Thermostat				Ranco
Typ/Type				K 59
Reglerstellung/Position				kalt warm
Schaltwerte/Switching values/		„ein“	°C	+ 4,5 + 4,5
Valeurs de commutation		„aus“		- 31,0 - 13,5
		(„abtauen“ od.)	„alarm“	
Füllmenge/Fill quantity/Charge		R12	g	95
Anschlußwert/Conn. load/ Puiss. connectée		W	110	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Resistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

Pos.		Matsushita	
		S075LKAA	
1		14 0599	
2			
3		03 2034	
4			
5			
6		05 8457	
7			
8		27 0833	
9		05 0166	
10			
11		08 8893	
12		05 6008	