



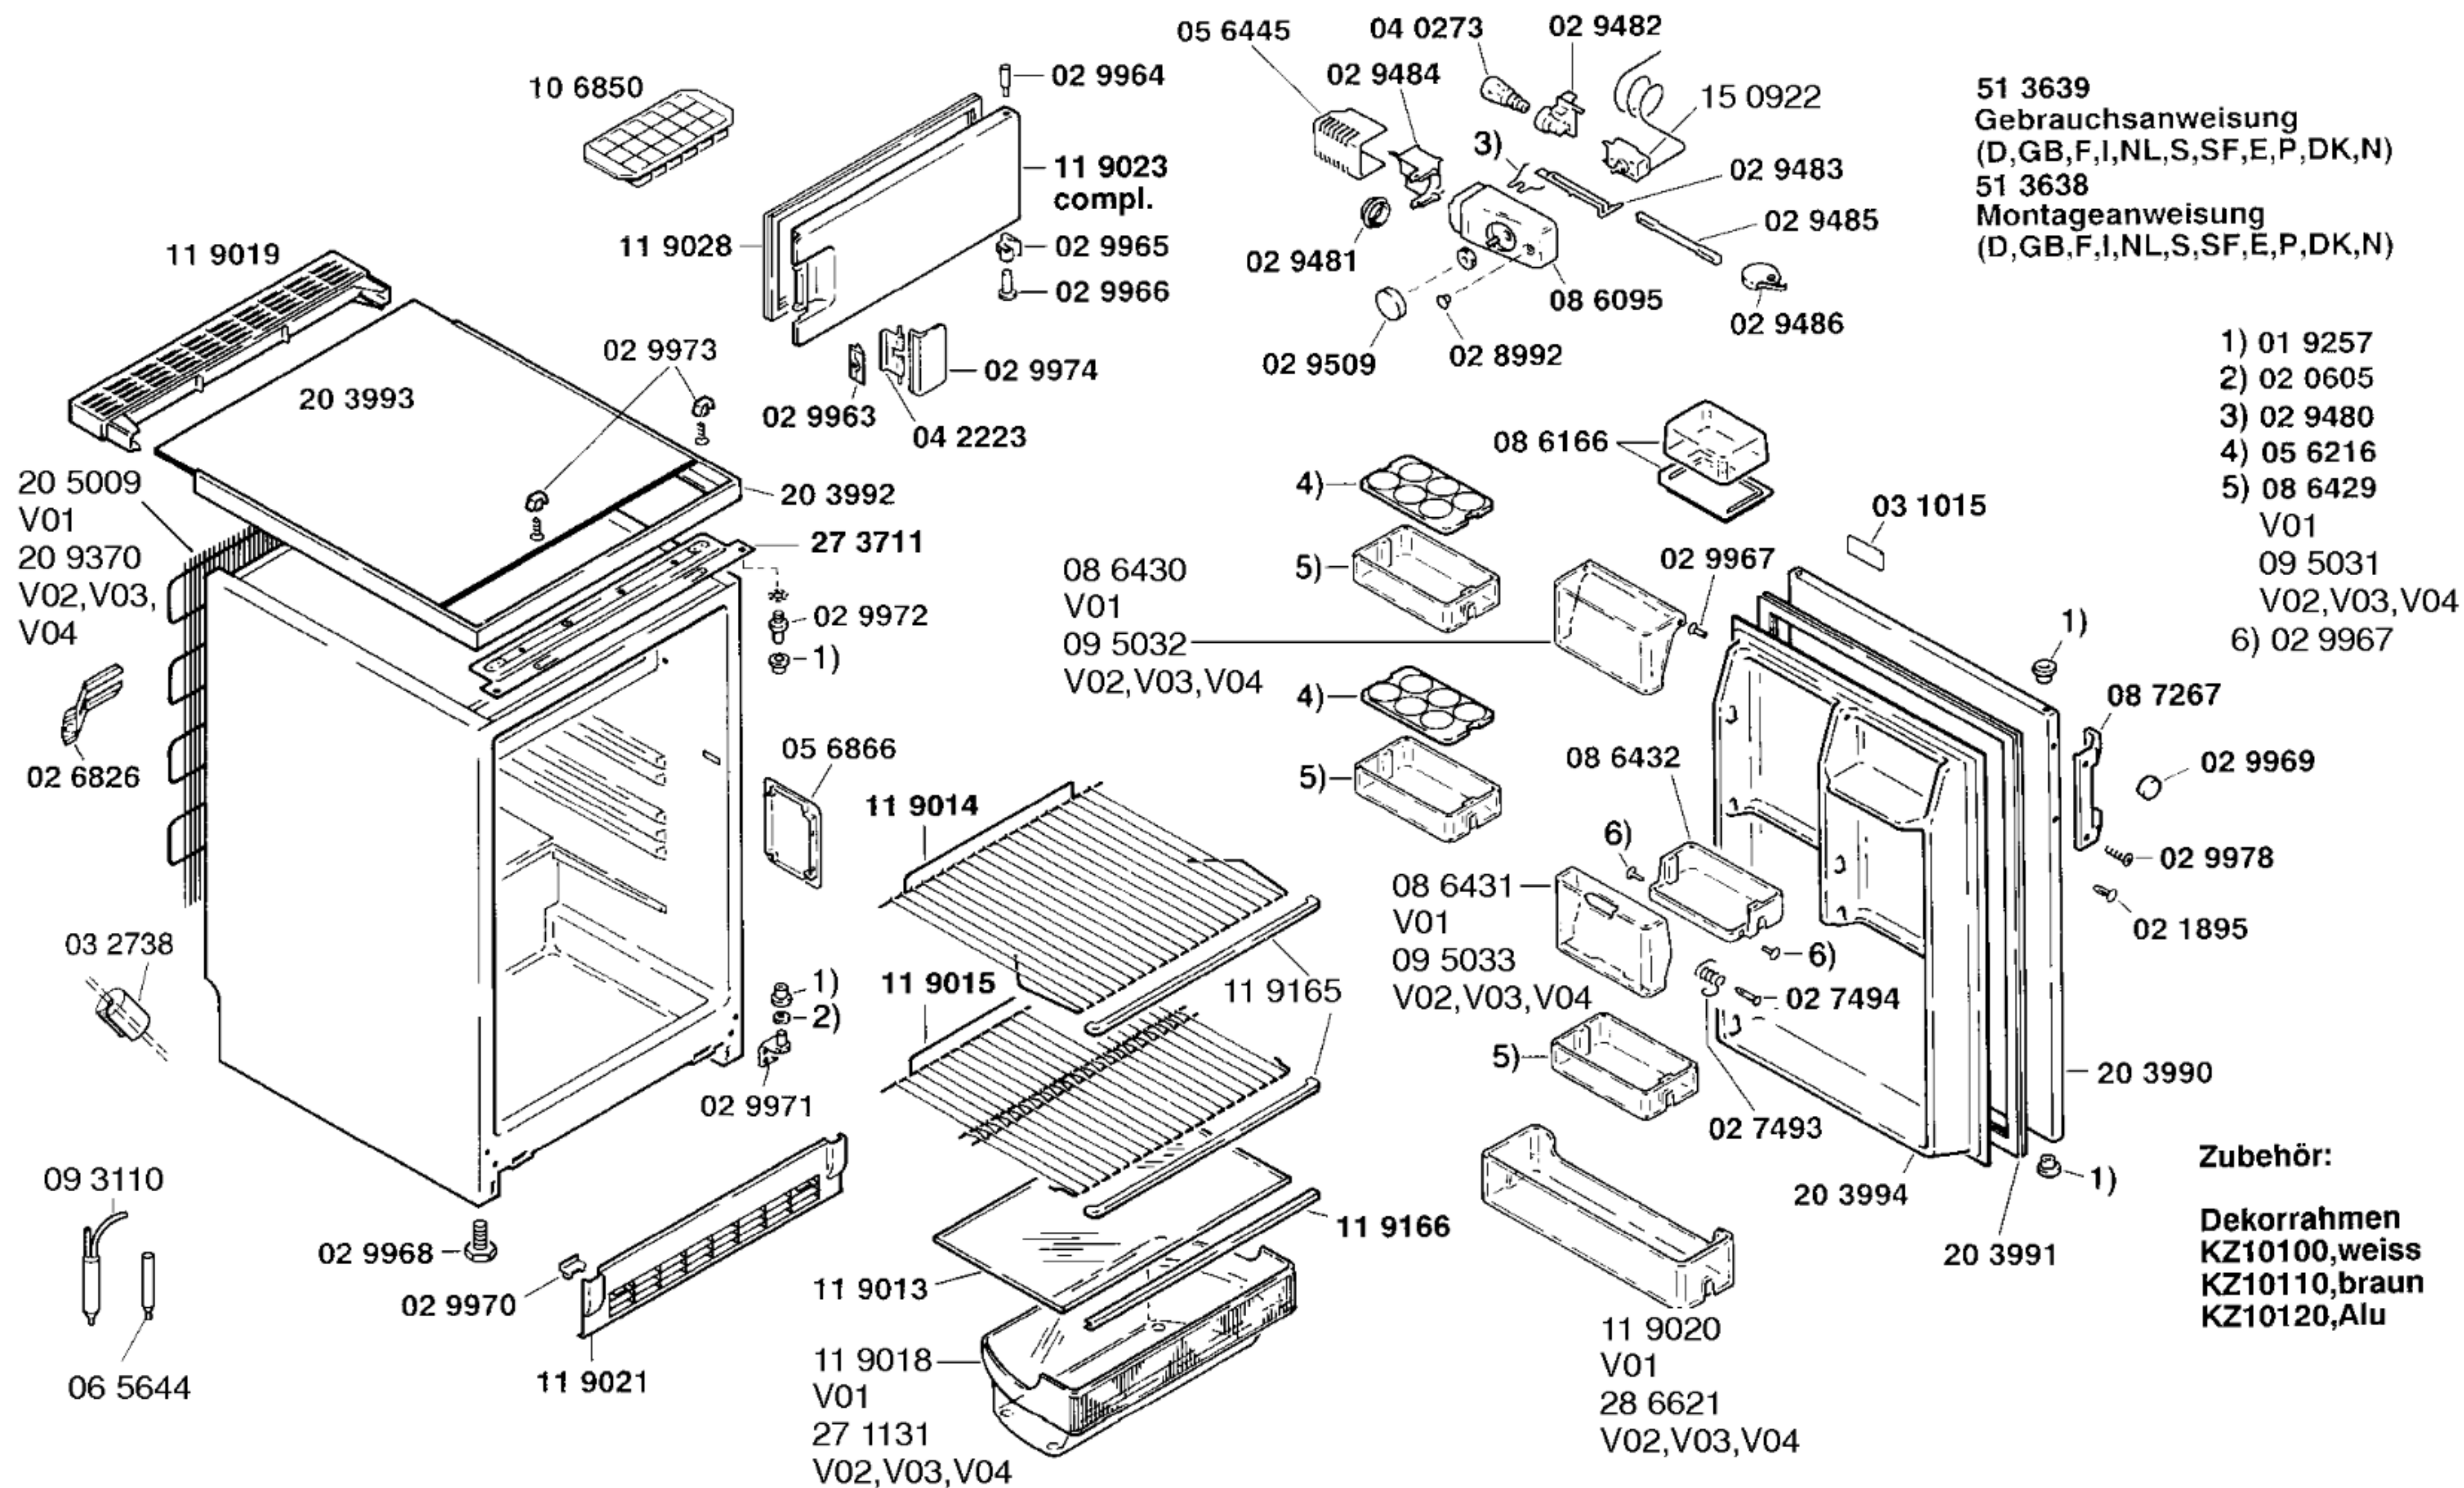

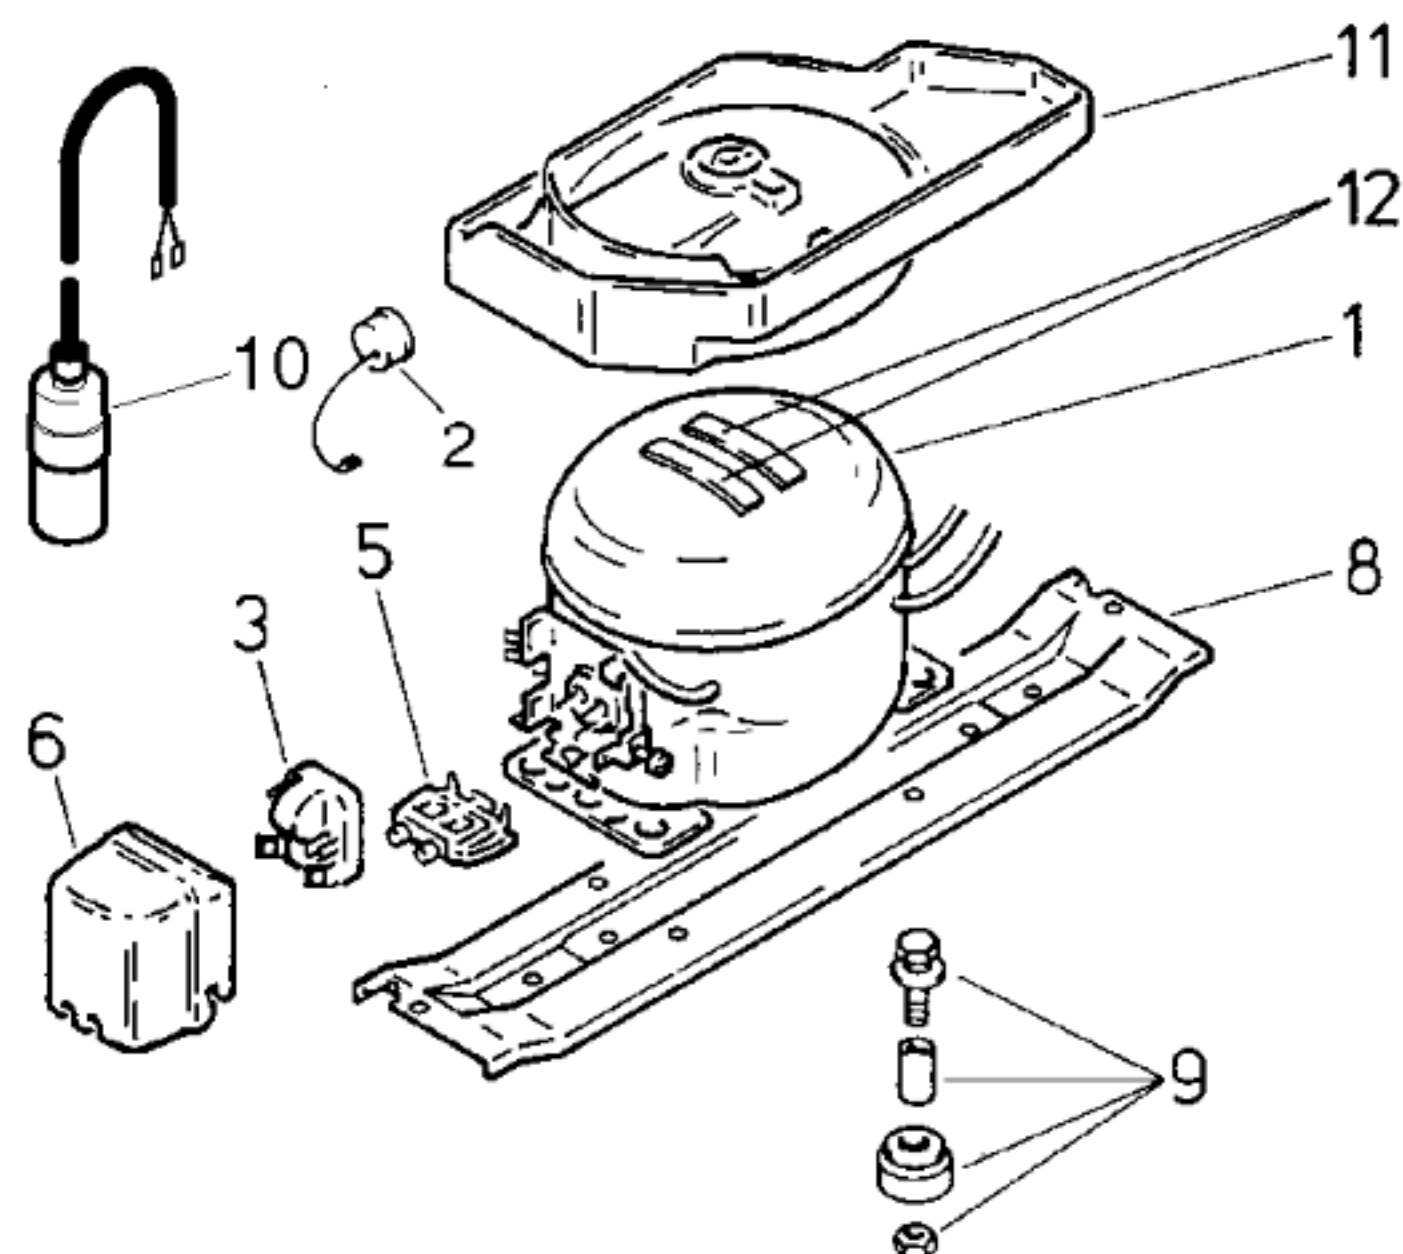

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES							
Verdichter/Compressor/Compresseur		Danfoss		Matsushita		Aspera	
Typ/Type		TL 5 F		SB48C		BPM10842	
Förderleistung/Delivery/Débit		l/h		873		747	
Anlaufstrom/Starting current/Cour de démarrage		A		7,5			
Widerstand/Resistance/Résistance		Ha/main/prin. Ω		25,7			
		Hi/aux Ω		15,7			
Temp.-Regler/Thermostat				Danfoss			
Typ/Type							
Reglerstellung/Position				kalt warm			
Schaltwerte/Switching values/ „ein“ $^{\circ}\text{C}$				+5,2 +5,2			
Valeurs de commutation „aus“				-31,0 -13,5			
(„abtauen“ od.) „alarm“							
Füllmenge/Fill.quantity/Charge		R134a g		80-V01		55-V02,V03,V04	
Anschlußwert/Conn.load/Puiss. connectée		W		120			
Heizung/Heater/Chauffage							
Widerstand/Resistance/Résistance		Ω					
Leistung/Power/Puissance		W					
Ventilator/Blower/Ventilateur							
Widerstand/Resistance/Résistance		Ω					
Schaltuhr/Timer/Minuterie de contact							
Widerstand/Resistance/Résistance		Ω					
Magnetventil/Magnetic valve/Electrovanne							
Widerstand/Resistance/Résistance		Ω					
Spannung/Voltage/Tension		V					

	V01,V02	V03	V04
Pos.	Danfoss	Matsushita	Aspera
	TL 5 F	SB48C	A34
1	14 1119	14 1315	14 1119
2			15 3559
3	06 8290	03 2034	15 3560
4			
5	06 8292		
6	06 8291	15 3303	
7			
8	27 1375	27 1375	
9	05 0166	05 0166	
10			
11	08 4744	08 8893	
12	05 6008	05 6008	