



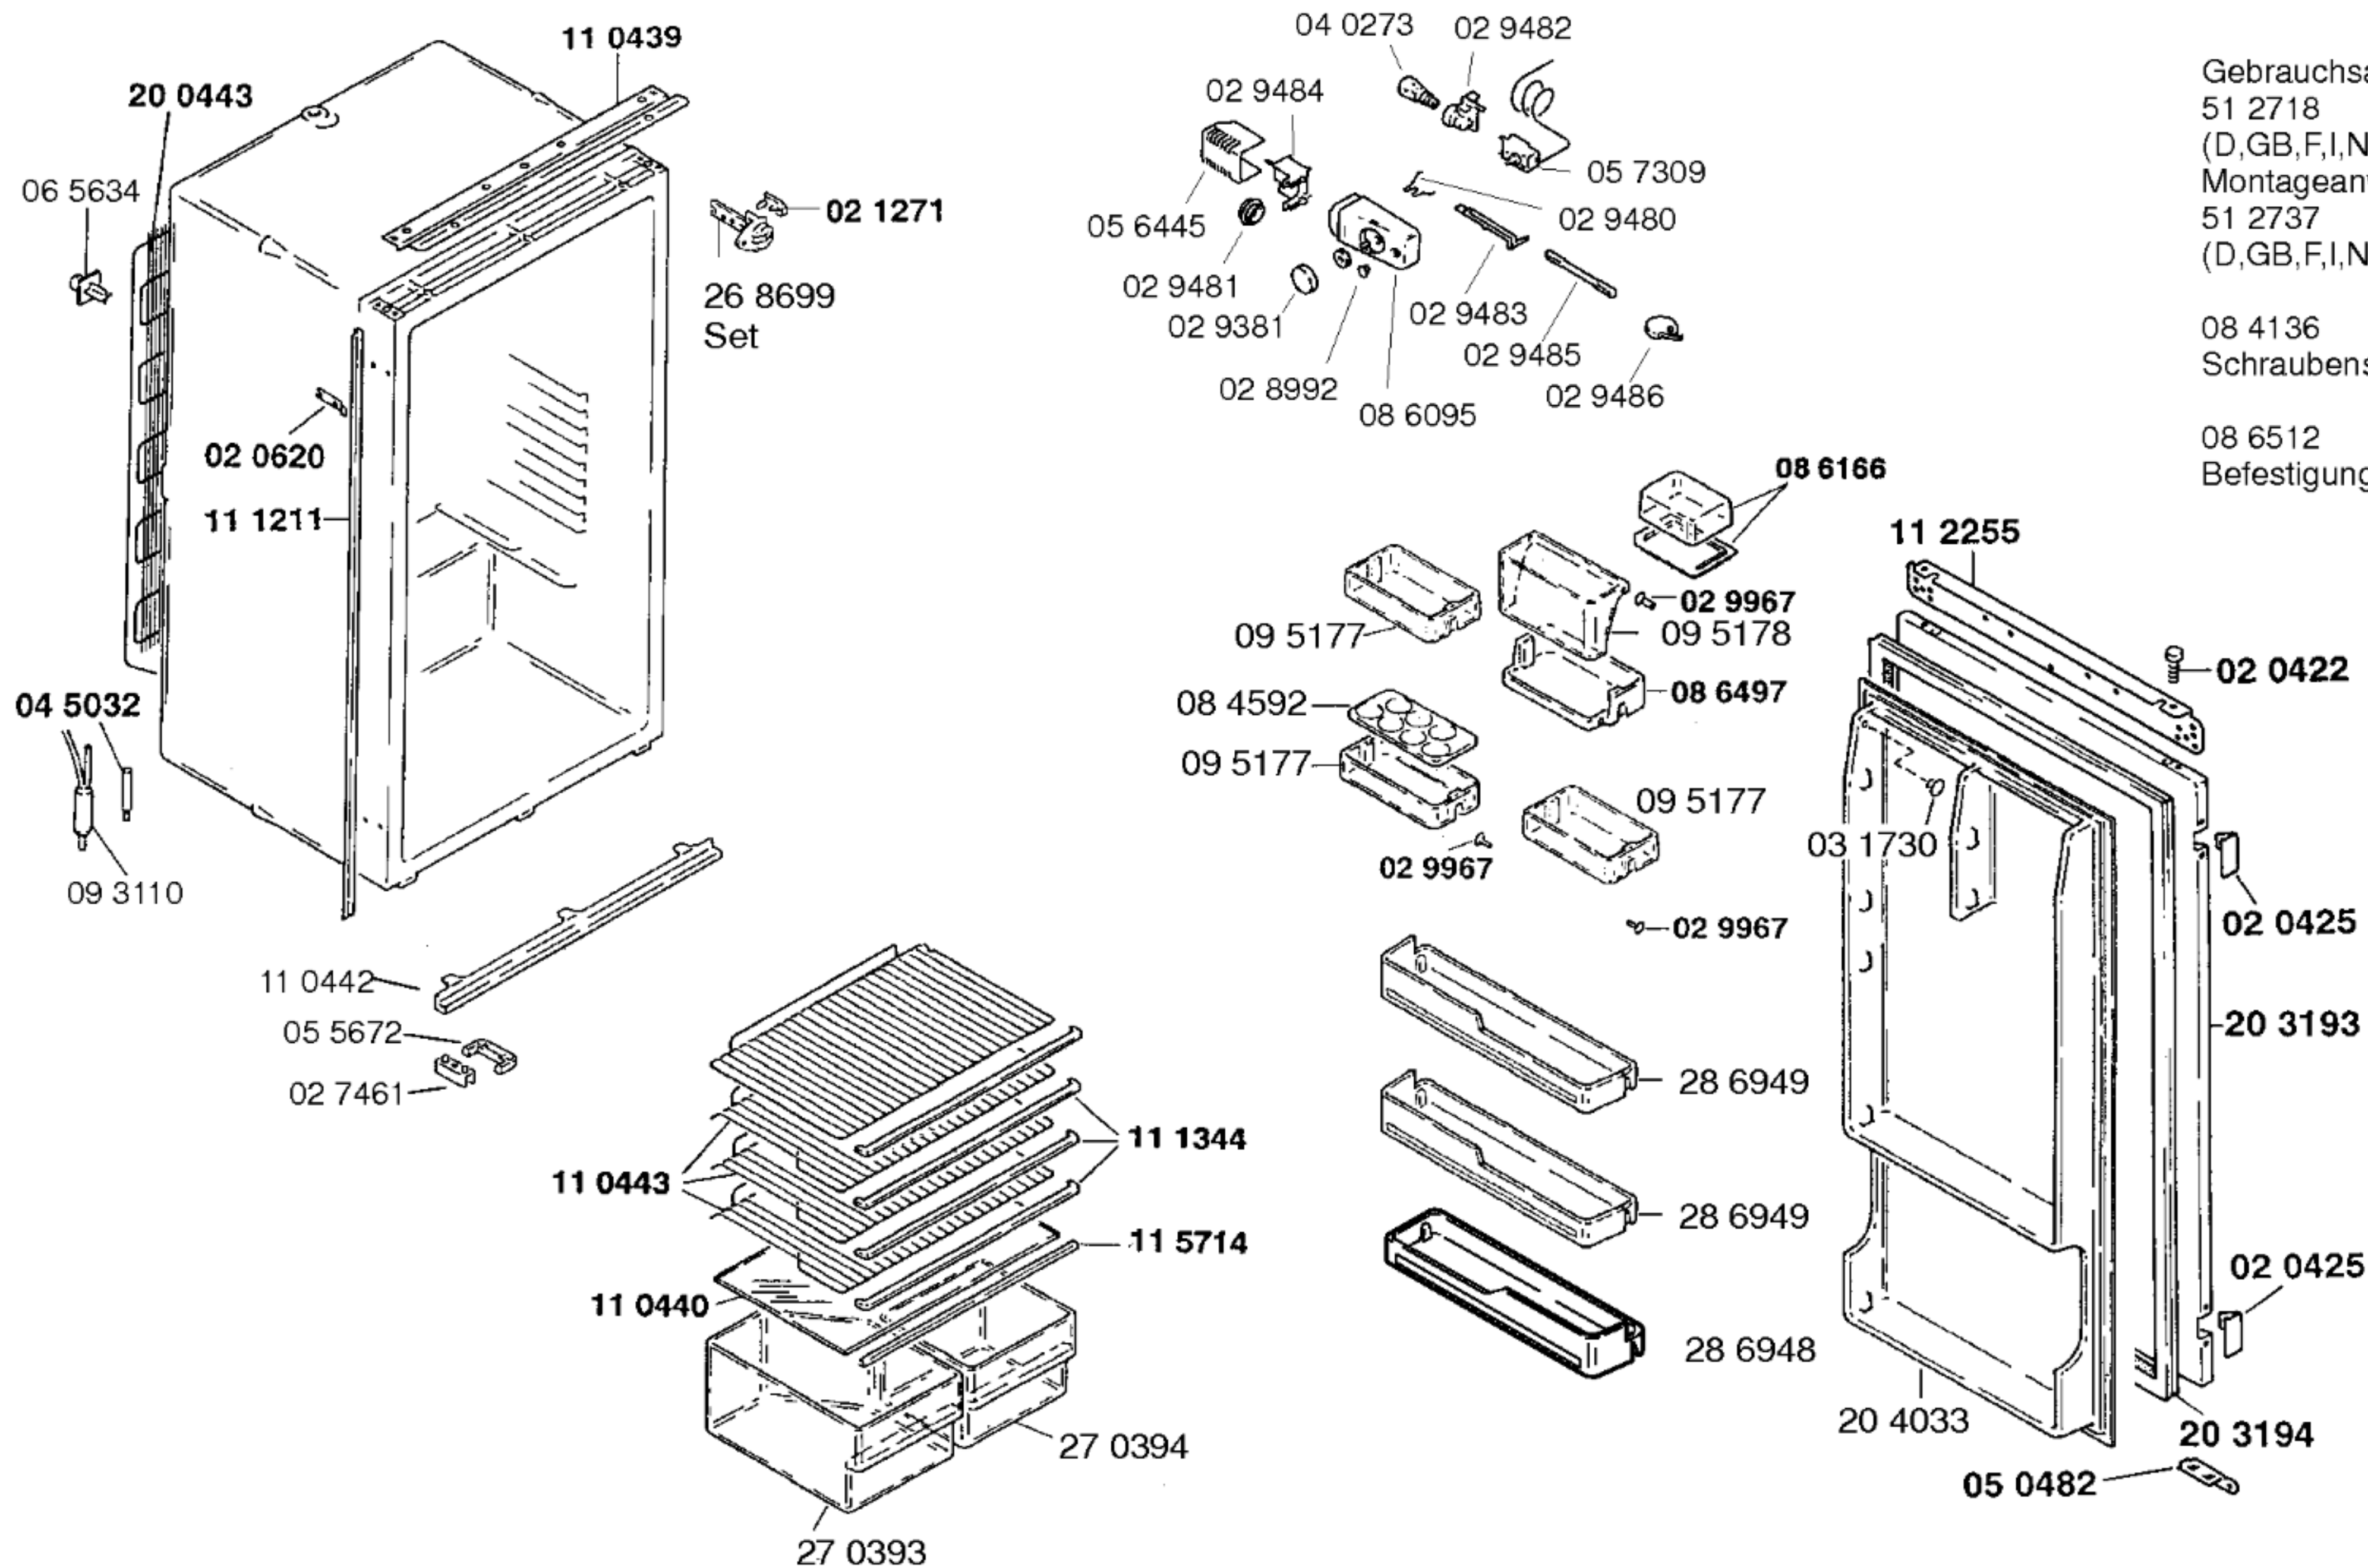

Gebrauchsanweisung  
51 2718  
(D,GB,F,I,NL,DK,N,S,SF,E)  
Montageanweisung  
51 2737  
(D,GB,F,I,NL,DK,N,S,SF,E)

08 4136  
Schraubensatz

08 6512  
Befestigungssatz

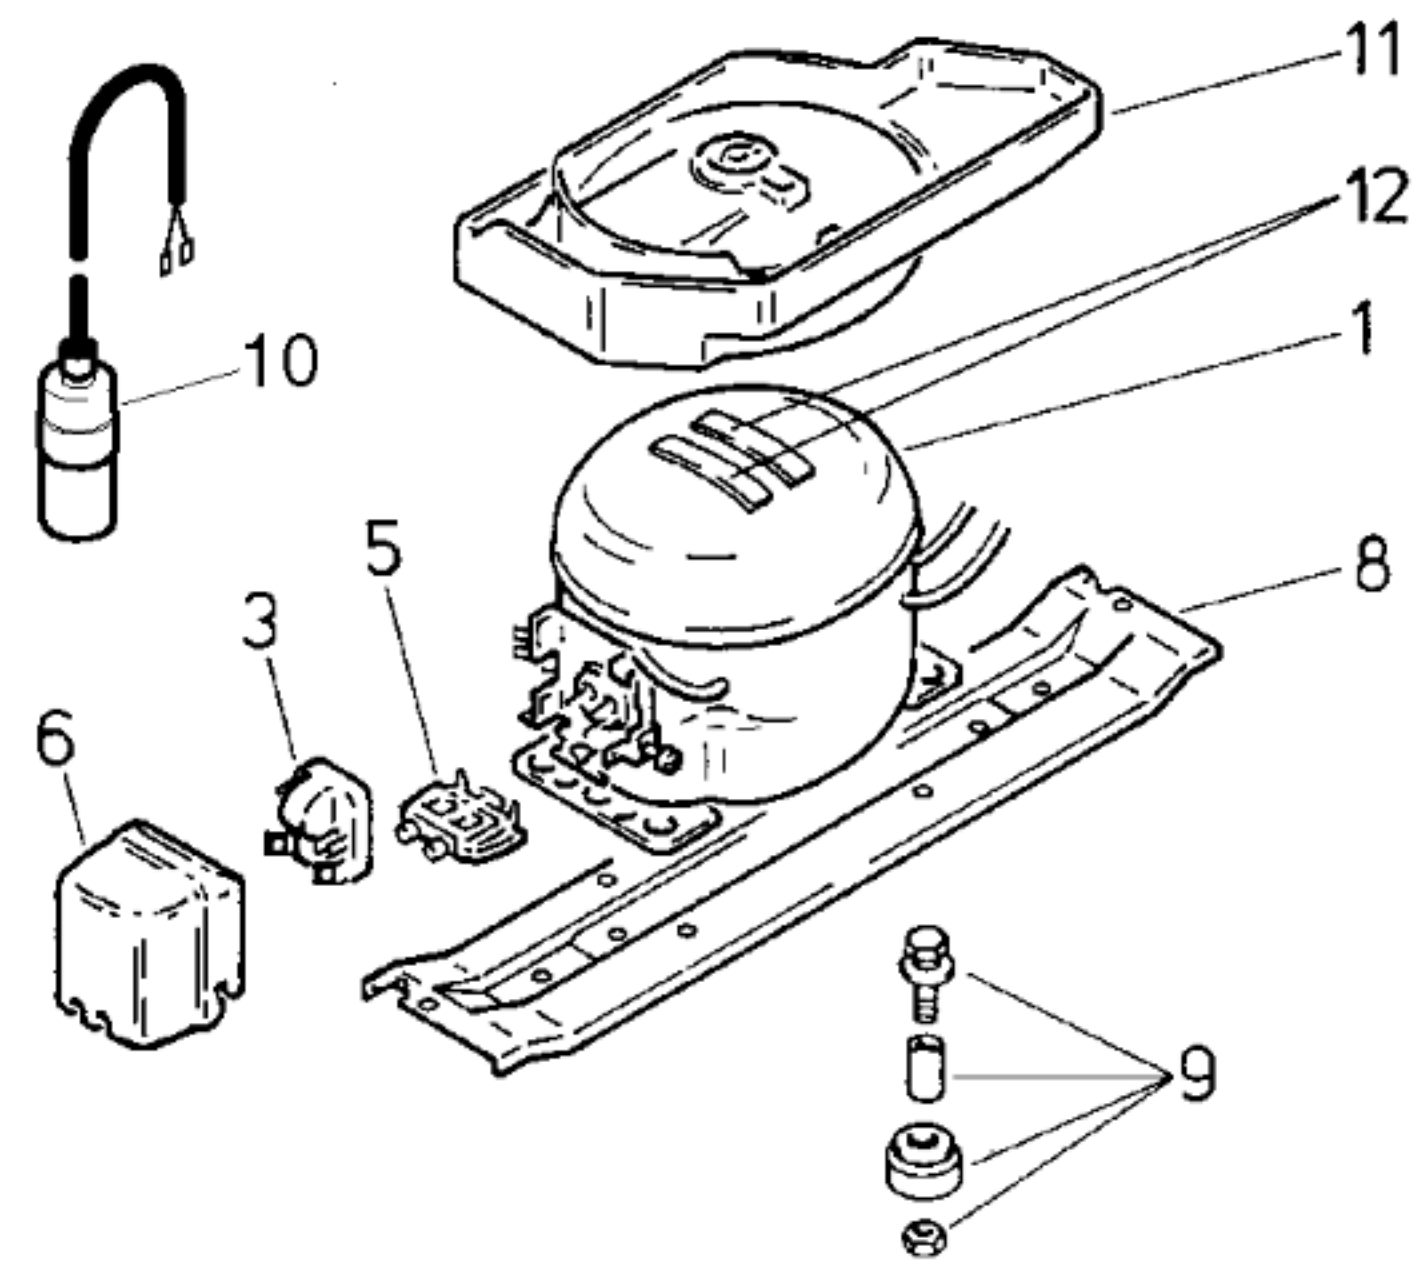

| Pos. |          |  |  |
|------|----------|--|--|
|      | Danfoss  |  |  |
|      | TLES 7 K |  |  |
| 1    | 14 1239  |  |  |
| 2    |          |  |  |
| 3    | 15 1055  |  |  |
| 4    |          |  |  |
| 5    | 15 0760  |  |  |
| 6    | 15 1072  |  |  |
| 7    |          |  |  |
| 8    | 27 8207  |  |  |
| 9    | 05 0166  |  |  |
| 10   |          |  |  |
| 11   | 08 4744  |  |  |
| 12   | 05 6008  |  |  |

| TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES |                          |          |      |
|--------------------------------------------------------|--------------------------|----------|------|
| Verdichter/Compressor/Compresseur                      |                          | Danfoss  |      |
| Typ/Type                                               |                          | TLES 7 K |      |
| Förderleistung/Delivery/Débit                          | l/h                      | 1168     |      |
| Anlaufstrom/Starting current/Cour de démarrage         | A                        | 4,5      |      |
| Widerstand/Resistance/Résistance                       | Ha/main/prin. $\Omega$   | 16,5     |      |
|                                                        | Hi/aux $\Omega$          | 16,9     |      |
| Temp.-Regler/Thermostat                                |                          | WHF      |      |
| Typ/Type                                               |                          | TF 57 F1 |      |
| Reglerstellung/Position                                |                          | kalt     | warm |
| Schaltwerte/Switching values/                          | „ein“ $^{\circ}\text{C}$ | +5       | +5   |
| Valeurs de commutation                                 | „aus“                    | -27      | -12  |
| („abtauen“ od.)                                        | „alarm“                  |          |      |
| Füllmenge/Fill.quantity/Charge                         | R600a                    | g        | 23   |
| Anschlußwert/Conn.load/Puiss. connectée                |                          | W        | 110  |
| Heizung/Heater/Chauffage                               |                          |          |      |
| Widerstand/Resistance/Résistance                       | $\Omega$                 |          |      |
| Leistung/Power/Puissance                               | W                        |          |      |
| Ventilator/Blower/Ventilateur                          |                          |          |      |
| Widerstand/Resistance/Résistance                       | $\Omega$                 |          |      |
| Schaltuhr/Timer/Minuterie de contact                   |                          |          |      |
| Widerstand/Resistance/Résistance                       | $\Omega$                 |          |      |
| Magnetventil/Magnetic valve/Electrovanne               |                          |          |      |
| Widerstand/Resistance/Résistance                       | $\Omega$                 |          |      |
| Spannung/Voltage/Tension                               | V                        |          |      |