



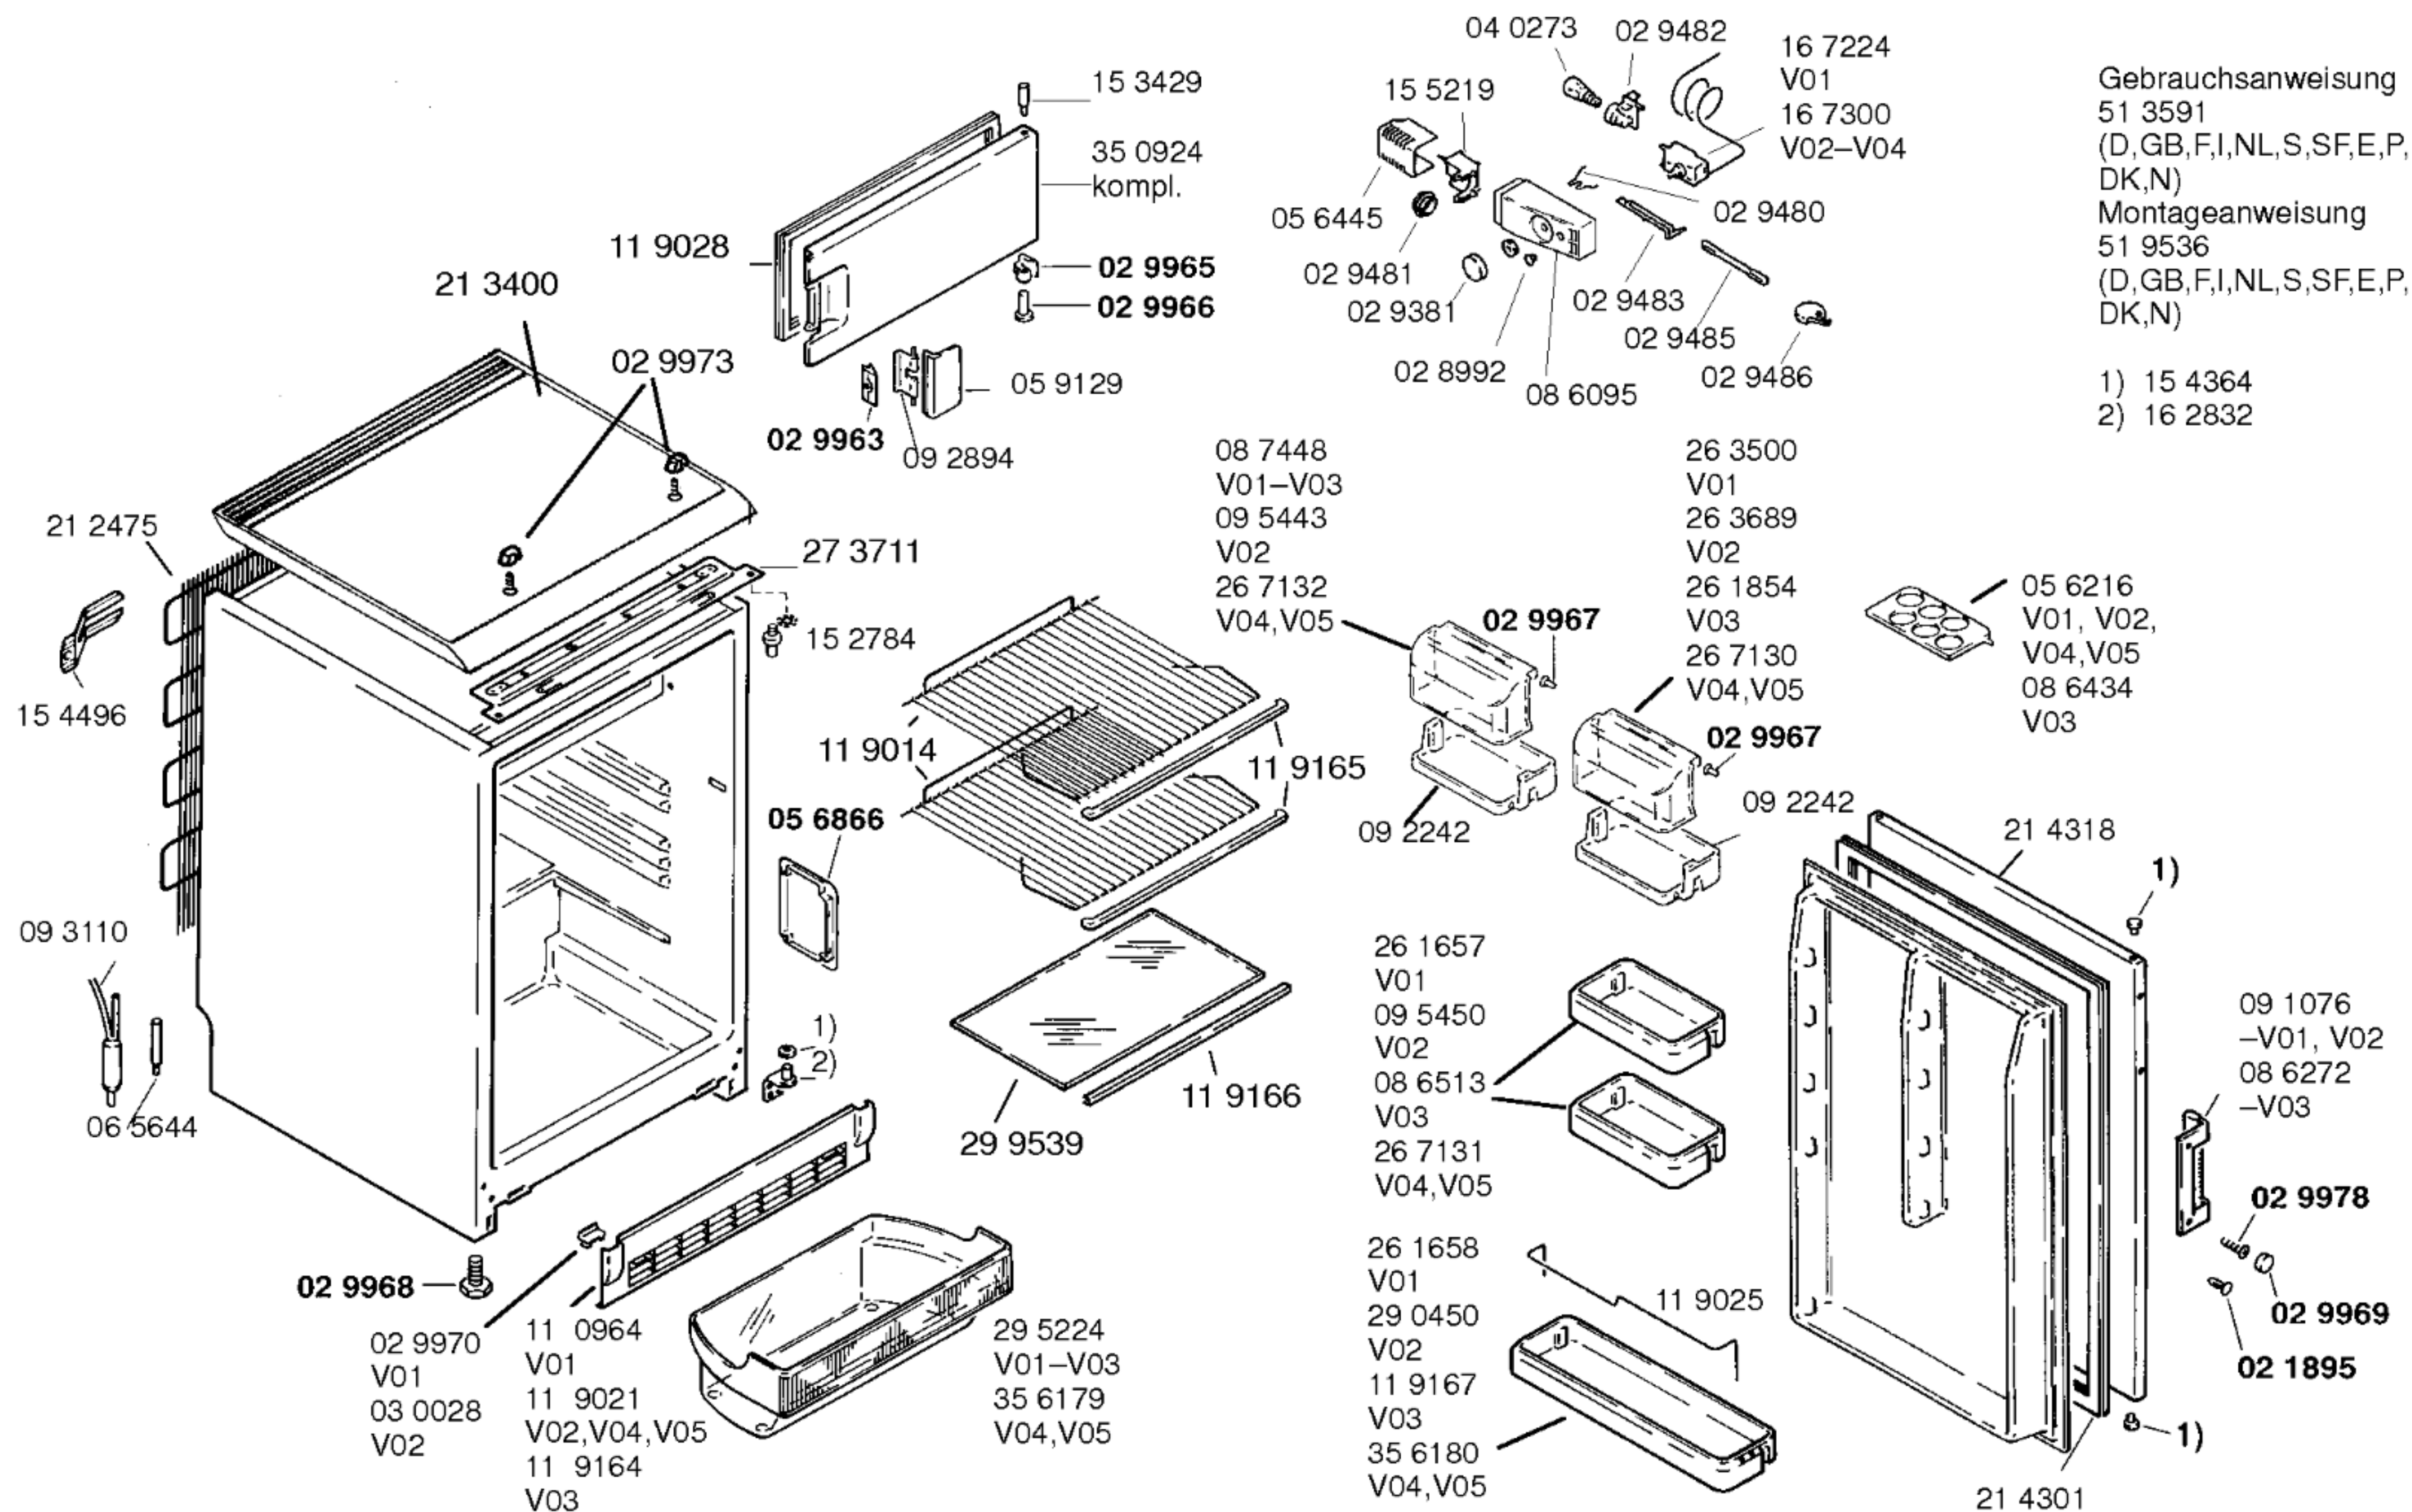

Gebrauchsanweisung  
51 3591  
(D, GB, F, I, NL, S, SF, E, P,  
DK, N)  
Montageanweisung  
51 9536  
(D, GB, F, I, NL, S, SF, E, P,  
DK, N)

- 1) 15 4364
- 2) 16 2832

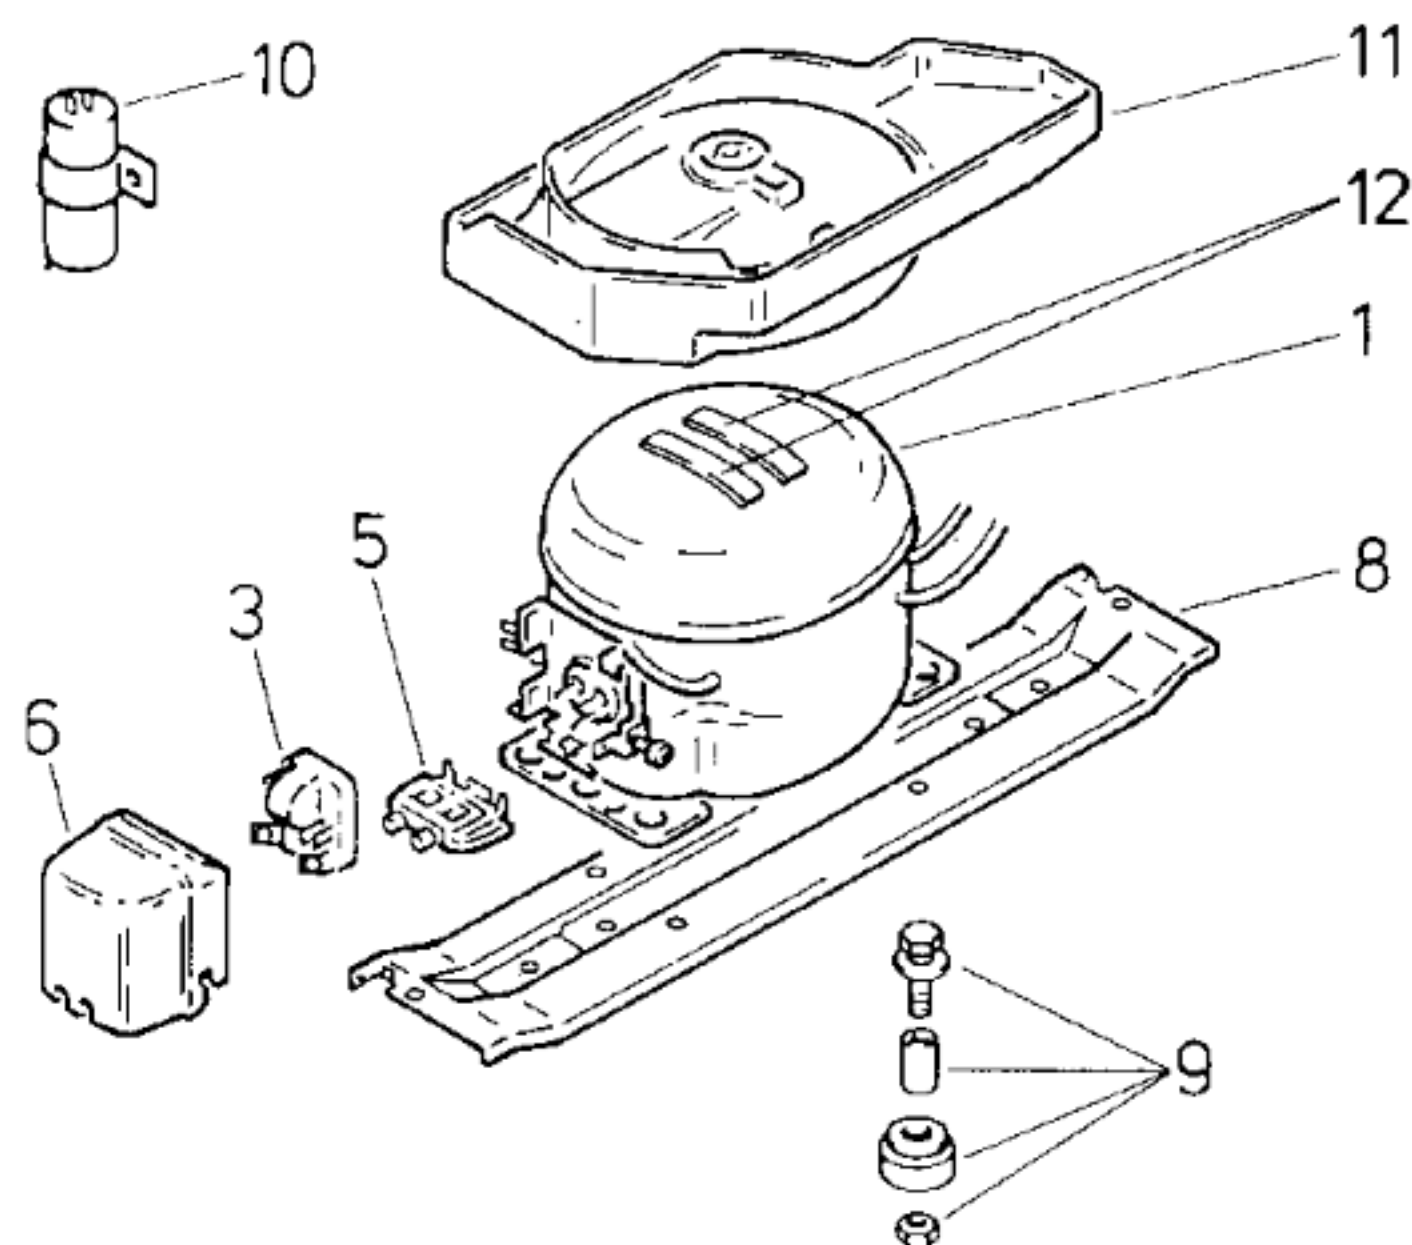

|      | V01,V02,V03 | V04     | V05      |
|------|-------------|---------|----------|
| Pos. | Matsushita  | Danfoss | Goldstar |
|      | SD65E       | TLES 7K | ND62NAEM |
| 1    | 14 1316     | 14 1903 | 14 2037  |
| 2    |             |         |          |
| 3    | 15 3306     | 15 1055 | 17 4893  |
| 4    |             |         | 17 0746  |
| 5    | 15 3865     | 15 0760 | 17 0745  |
| 6    | 15 3303     | 15 1072 | 17 0744  |
| 7    |             |         | 16 9319  |
| 8    | 27 0833     | 27 0833 | 27 0833  |
| 9    | 05 0166     | 05 0166 | 05 0166  |
| 10   |             |         |          |
| 11   | 26 1981     | 08 4744 | 08 4744  |
| 12   | 05 6008     | 05 6008 | 05 6008  |

| TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES |  |                          |         |          |
|--------------------------------------------------------|--|--------------------------|---------|----------|
| Verdichter/Compressor/Compresseur                      |  | Matsushita               | Danfoss | Goldstar |
| Typ/Type                                               |  | SD65E                    | TLES 7K | ND62NAEM |
| Förderleistung/Delivery/Débit                          |  | l/h                      | 1168    | 1242     |
| Anlaufstrom/Starting current/Cour de démarrage         |  | A                        | 8,8     | 2,2      |
| Widerstand/Resistance/Résistance                       |  | Ha/main/prin. $\Omega$   | 18,9    | 29,5     |
|                                                        |  | Hi/aux $\Omega$          | 15,3    | 21,0     |
| Temp. Regler/Thermostat                                |  |                          |         |          |
| Typ/Type                                               |  |                          |         |          |
| Reglerstellung/Position                                |  |                          |         |          |
| Schaltwerte/Switching values/                          |  | „ein“ $^{\circ}\text{C}$ |         |          |
| Valeurs de commutation                                 |  | „aus“                    |         |          |
|                                                        |  | („abtauen“ od.) „alarm“  |         |          |
| Füllmenge/Fill.quantity/Charge                         |  | R600a                    | g       | *        |
| Anschlußwert/Conn.load/Puiss. connectée                |  | W                        | 78      |          |
| Heizung/Heater/Chauffage                               |  |                          |         |          |
| Widerstand/Resistance/Résistance                       |  | $\Omega$                 |         |          |
| Leistung/Power/Puissance                               |  | W                        |         |          |
| Ventilator/Blower/Ventilateur                          |  |                          |         |          |
| Widerstand/Resistance/Résistance                       |  | $\Omega$                 |         |          |
| Schaltuhr/Timer/Minuterie de contact                   |  |                          |         |          |
| Widerstand/Resistance/Résistance                       |  | $\Omega$                 |         |          |
| Magnetventil/Magnetic valve/Electrovanne               |  |                          |         |          |
| Widerstand/Resistance/Résistance                       |  | $\Omega$                 |         |          |
| Spannung/Voltage/Tension                               |  | V                        |         |          |

\* siehe Typenschild