



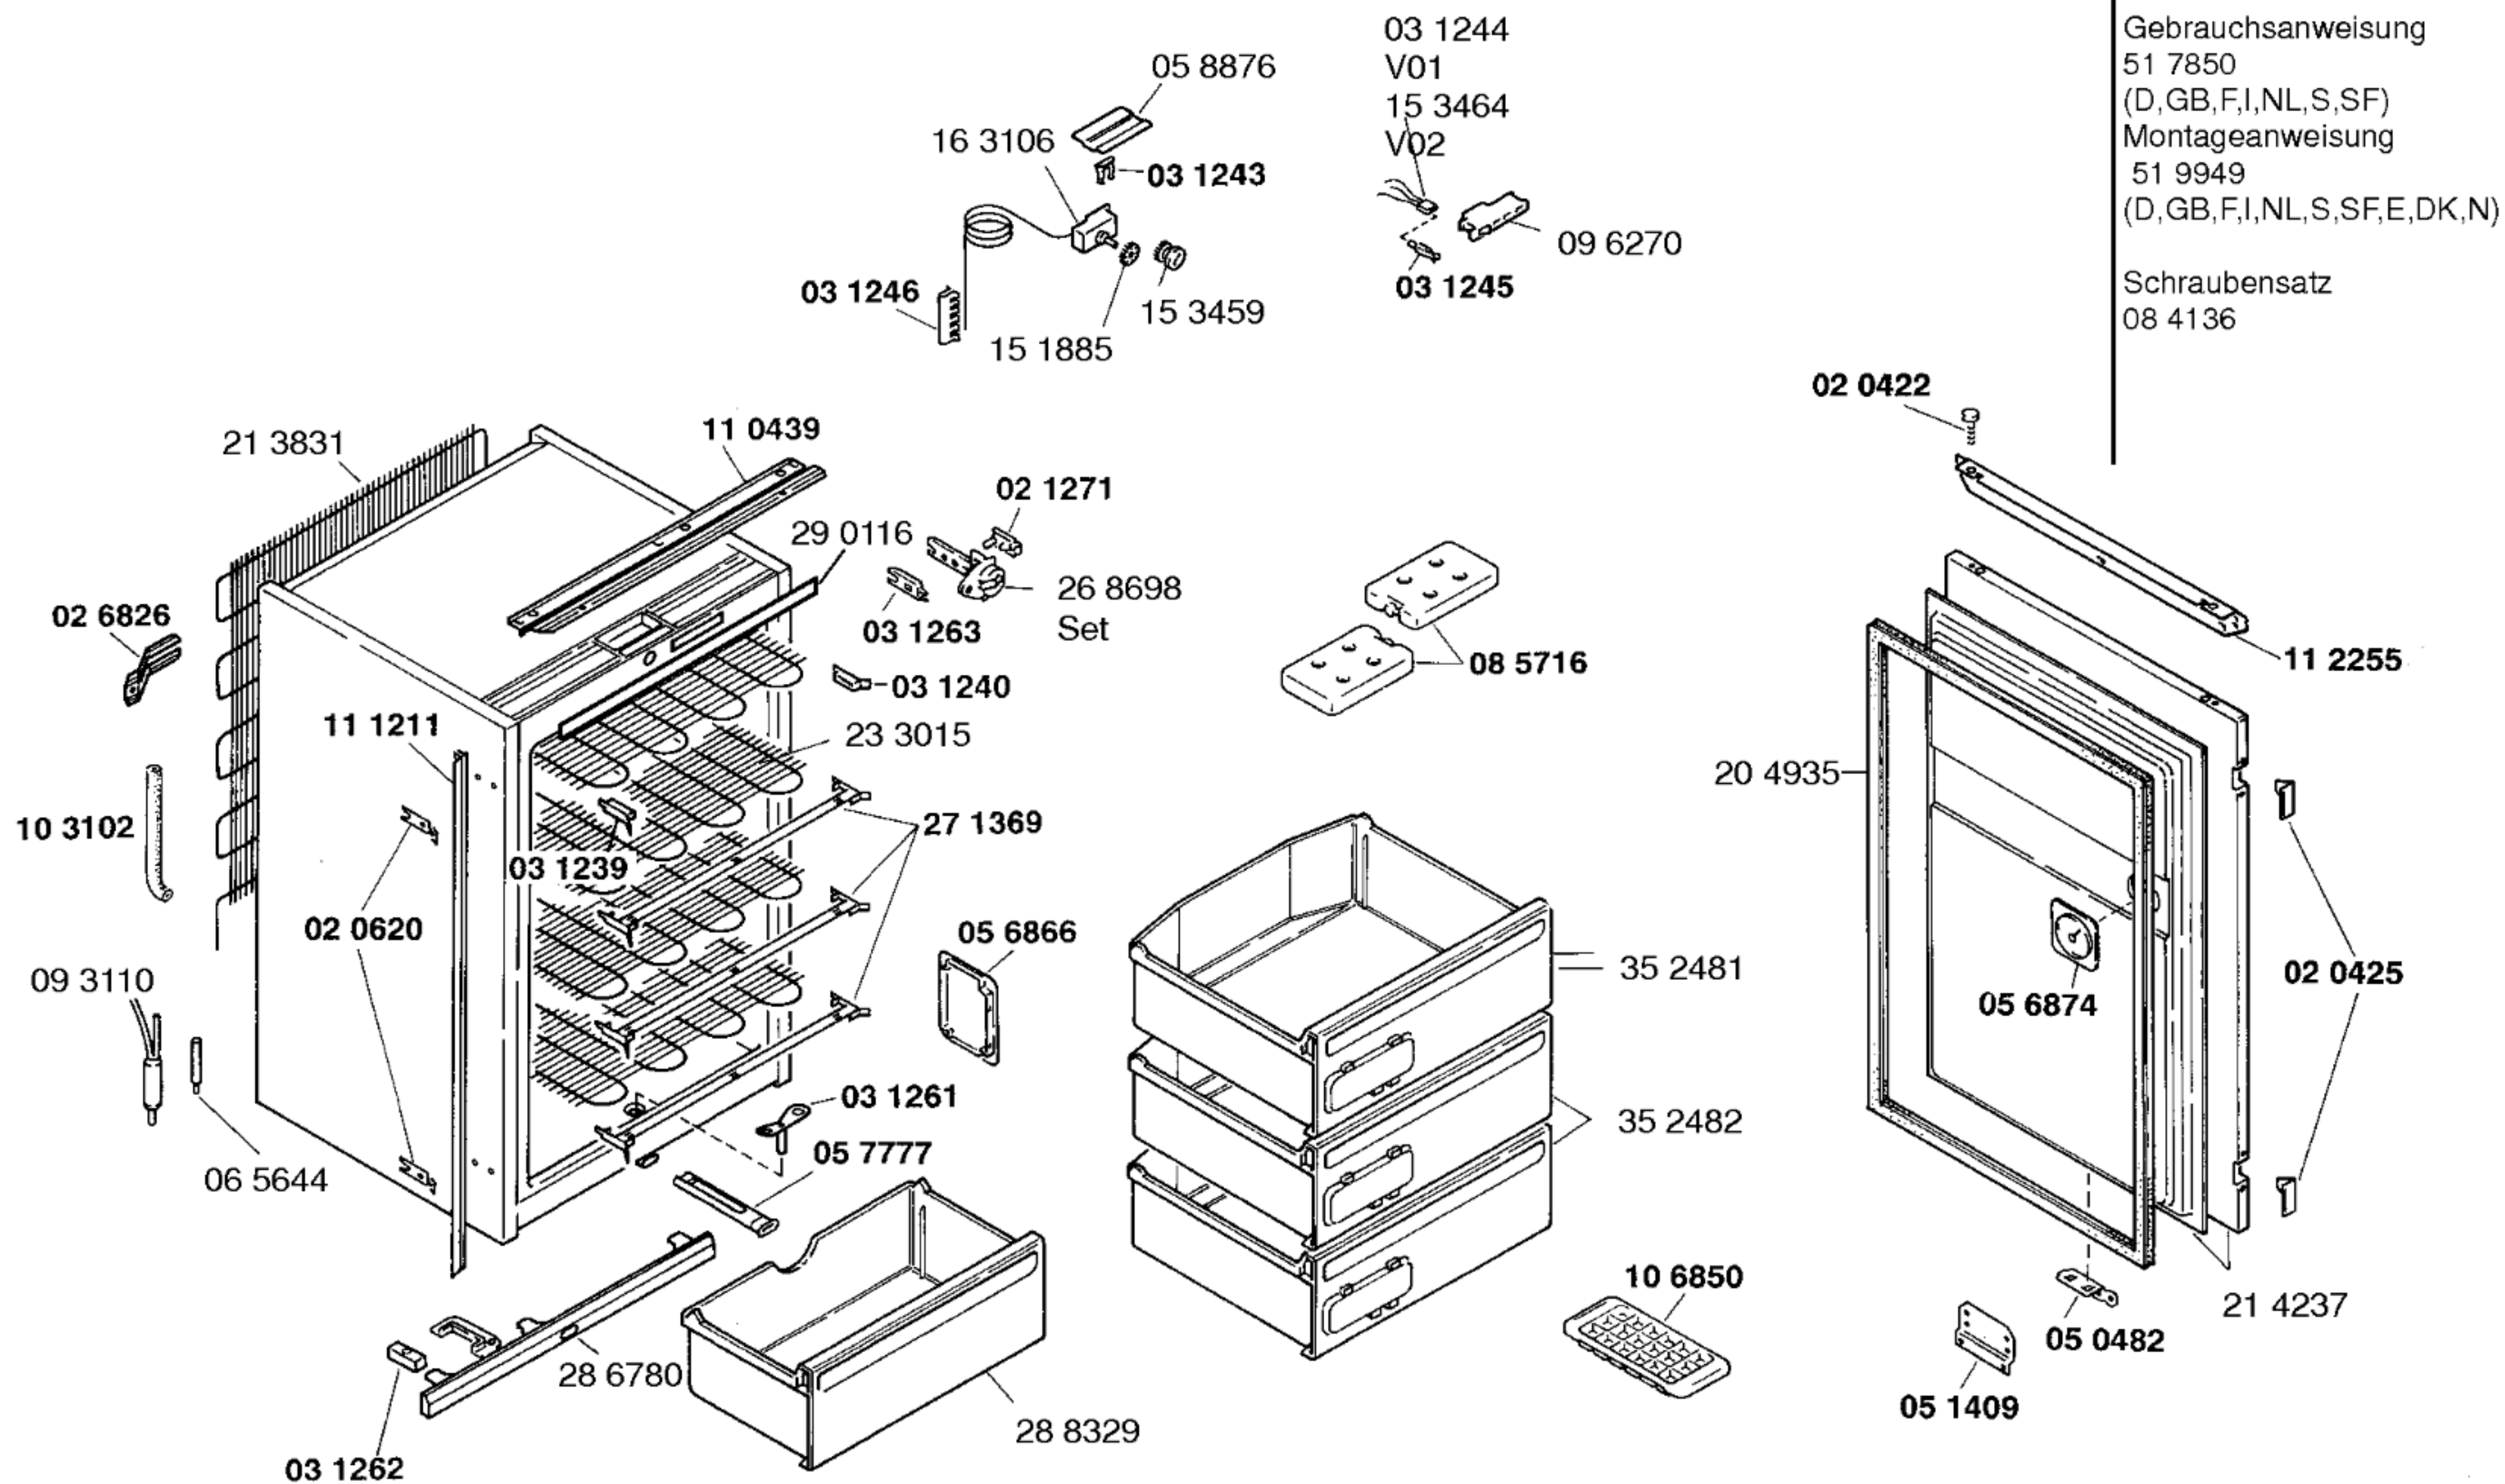

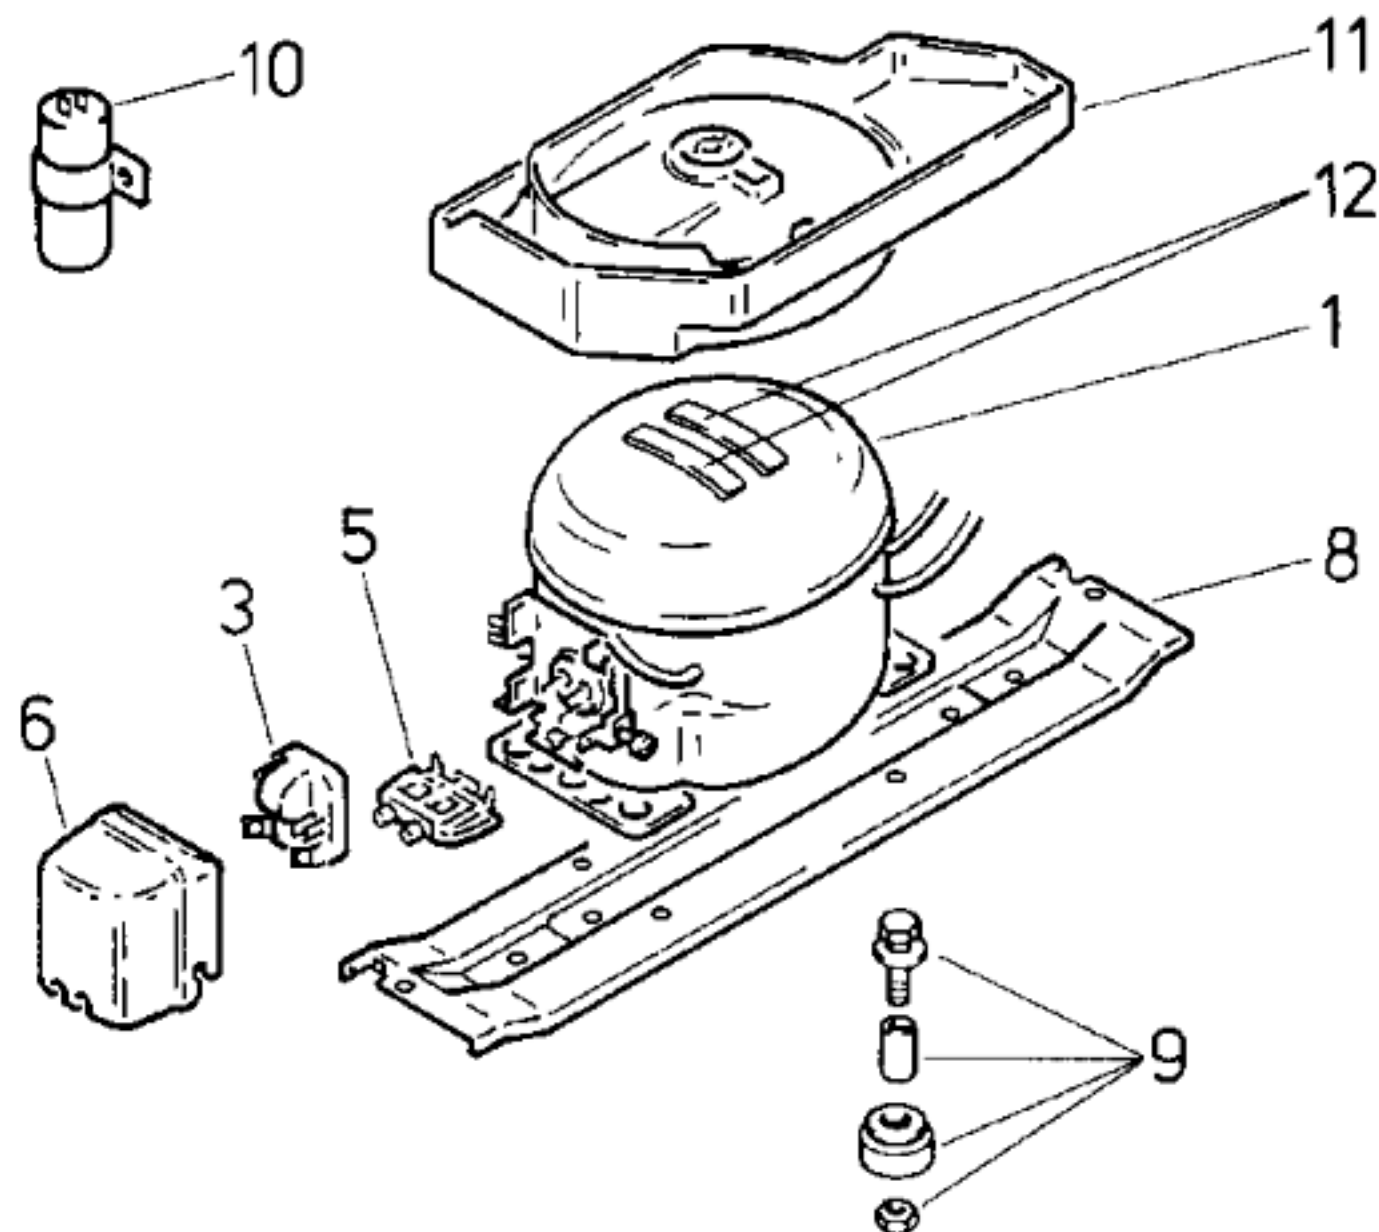

Pos.	Danfoss	Matsushita	
	TLES 7 K	SD 65 E	
1	14 1239	14 1316	
2			
3	15 1055	15 3306	
4			
5	15 0760	15 3865	
6	15 1072	15 3303	
7			
8	27 1375	27 1375	
9	05 0166	05 0166	
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES					
Verdichter/Compressor/Compresseur		Danfoss		Matsushita	
Typ/Type		TLES 7 K		SD 65 E	
Förderleistung/Delivery/Débit		l/h	1168	1170	
Anlaufstrom/Starting current/Cour de démarrage		A	4,5	5,5	
Widerstand/Resistance/Résistance		Ha/main/prin.	Ω	16,5	
		Hi/aux	Ω	16,9	
Temp.-Regler/Thermostat		WHF		Danfoss	
Typ/Type		TF 57 SF2		077b2192	
Reglerstellung/Position		kalt	warm	kalt	warm
Schaltwerte/Switching values/		„ein“	°C	-25	-17
Valeurs de commutation		„aus“		-33	-23
(„abtauen“ od.)		„alarm“		-19,5	-13
Füllmenge/Fill.quantity/Charge		R600a	g	*	*
Anschlußwert/Conn.load/Puiss. connectée		W	79		78
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω			
Leistung/Power/Puissance		W			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Schaltuhr/Timer/Minuterie de contact					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			

* siehe Typenschild