



07 4445
V01,V02
09 6325
V03,V04

21 0245
kompl.

02 9973

1)

20 9379

1)

28 8280

15 2784
1)

05 6866

28 5375

28 5376

28 5378

28 5377

28 3863

28 9665

02 9968

15 4365

1)
2)

15 4366

03 2738

09 3110

06 5644

05 6445

04 0273

02 9482

02 9484

05 7309

02 9481

08 6095

02 9483

02 9485

02 9509

02 8992

02 9486

08 6166

4)

5)

15 1141

4)

5)

09 5371

08 7866

09 5449

09 5370

02 7494

02 7493

02 7494

02 7493

02 7494

02 7493

02 7494

02 7493

02 7494

29 6278

15 0719

02 7494

21 2153

02 9969

06 8654

29 6170

Gebrauchsanweisung
51 3614

(D,GB,F,I,NL,S,SF,E,P,
DK,N)

Montageanweisung
26 1542

(D,GB,F,I,NL,S,SF,E,P,
DK,N)

1) 15 2784


2) 15 4364

3) 02 9480

4) 08 4592

5) 26 1604

6) 03 1730

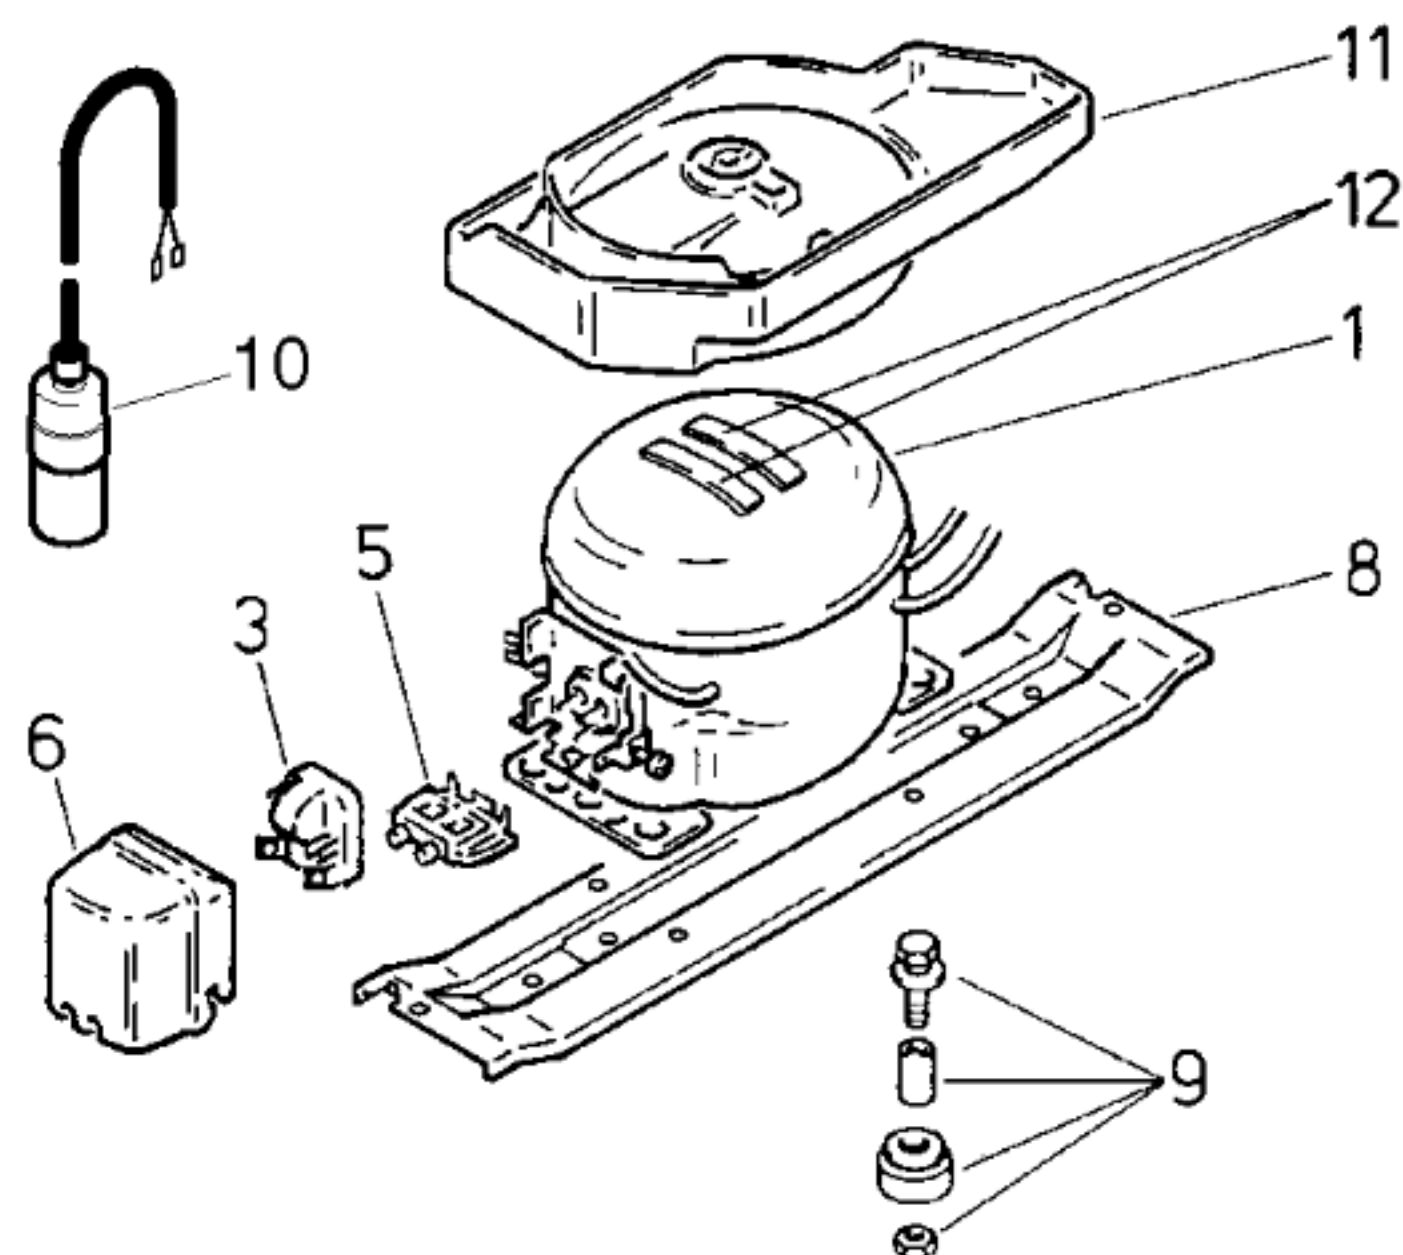

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur		Danfoss	Matsushita
Typ/Type		TLES 7 K	SD 65 E
Förderleistung/Delivery/Débit	l/h	1168	1170
Anlaufstrom/Starting current/Cour de démarrage	A	4,5	
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	16,5	
	Hi/aux Ω	16,9	
Temp.-Regler/Thermostat		Ranco	
Typ/Type		K59	
Reglerstellung/Position		kalt	warm
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	+4,5	+4,5
Valeurs de commutation	„aus“	-31,0	-13,5
	(„abtauen“ od.) „alarm“		
Füllmenge/Fill.quantity/Charge	R600a g	24	
Anschlußwert/Conn.load/Puiss. connectée	W	79	
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		
Schaltuhr/Timer/Minuterie de contact			
Widerstand/Resistance/Résistance	Ω		
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		

	V01,V03	V02,V04	
Pos.	Danfoss	Matsushita	
	TLES 7 K	SD 65 E	
1	14 1239	14 1316	
2			
3	15 1055	15 3306	
4			
5	15 0760	15 3865	
6	15 1072	15 3303	
7			
8	27 0291	27 0291	
9	05 0166	05 0166	
10			
11	08 4744	08 8893	
12	05 6008	05 6008	