






07 4445

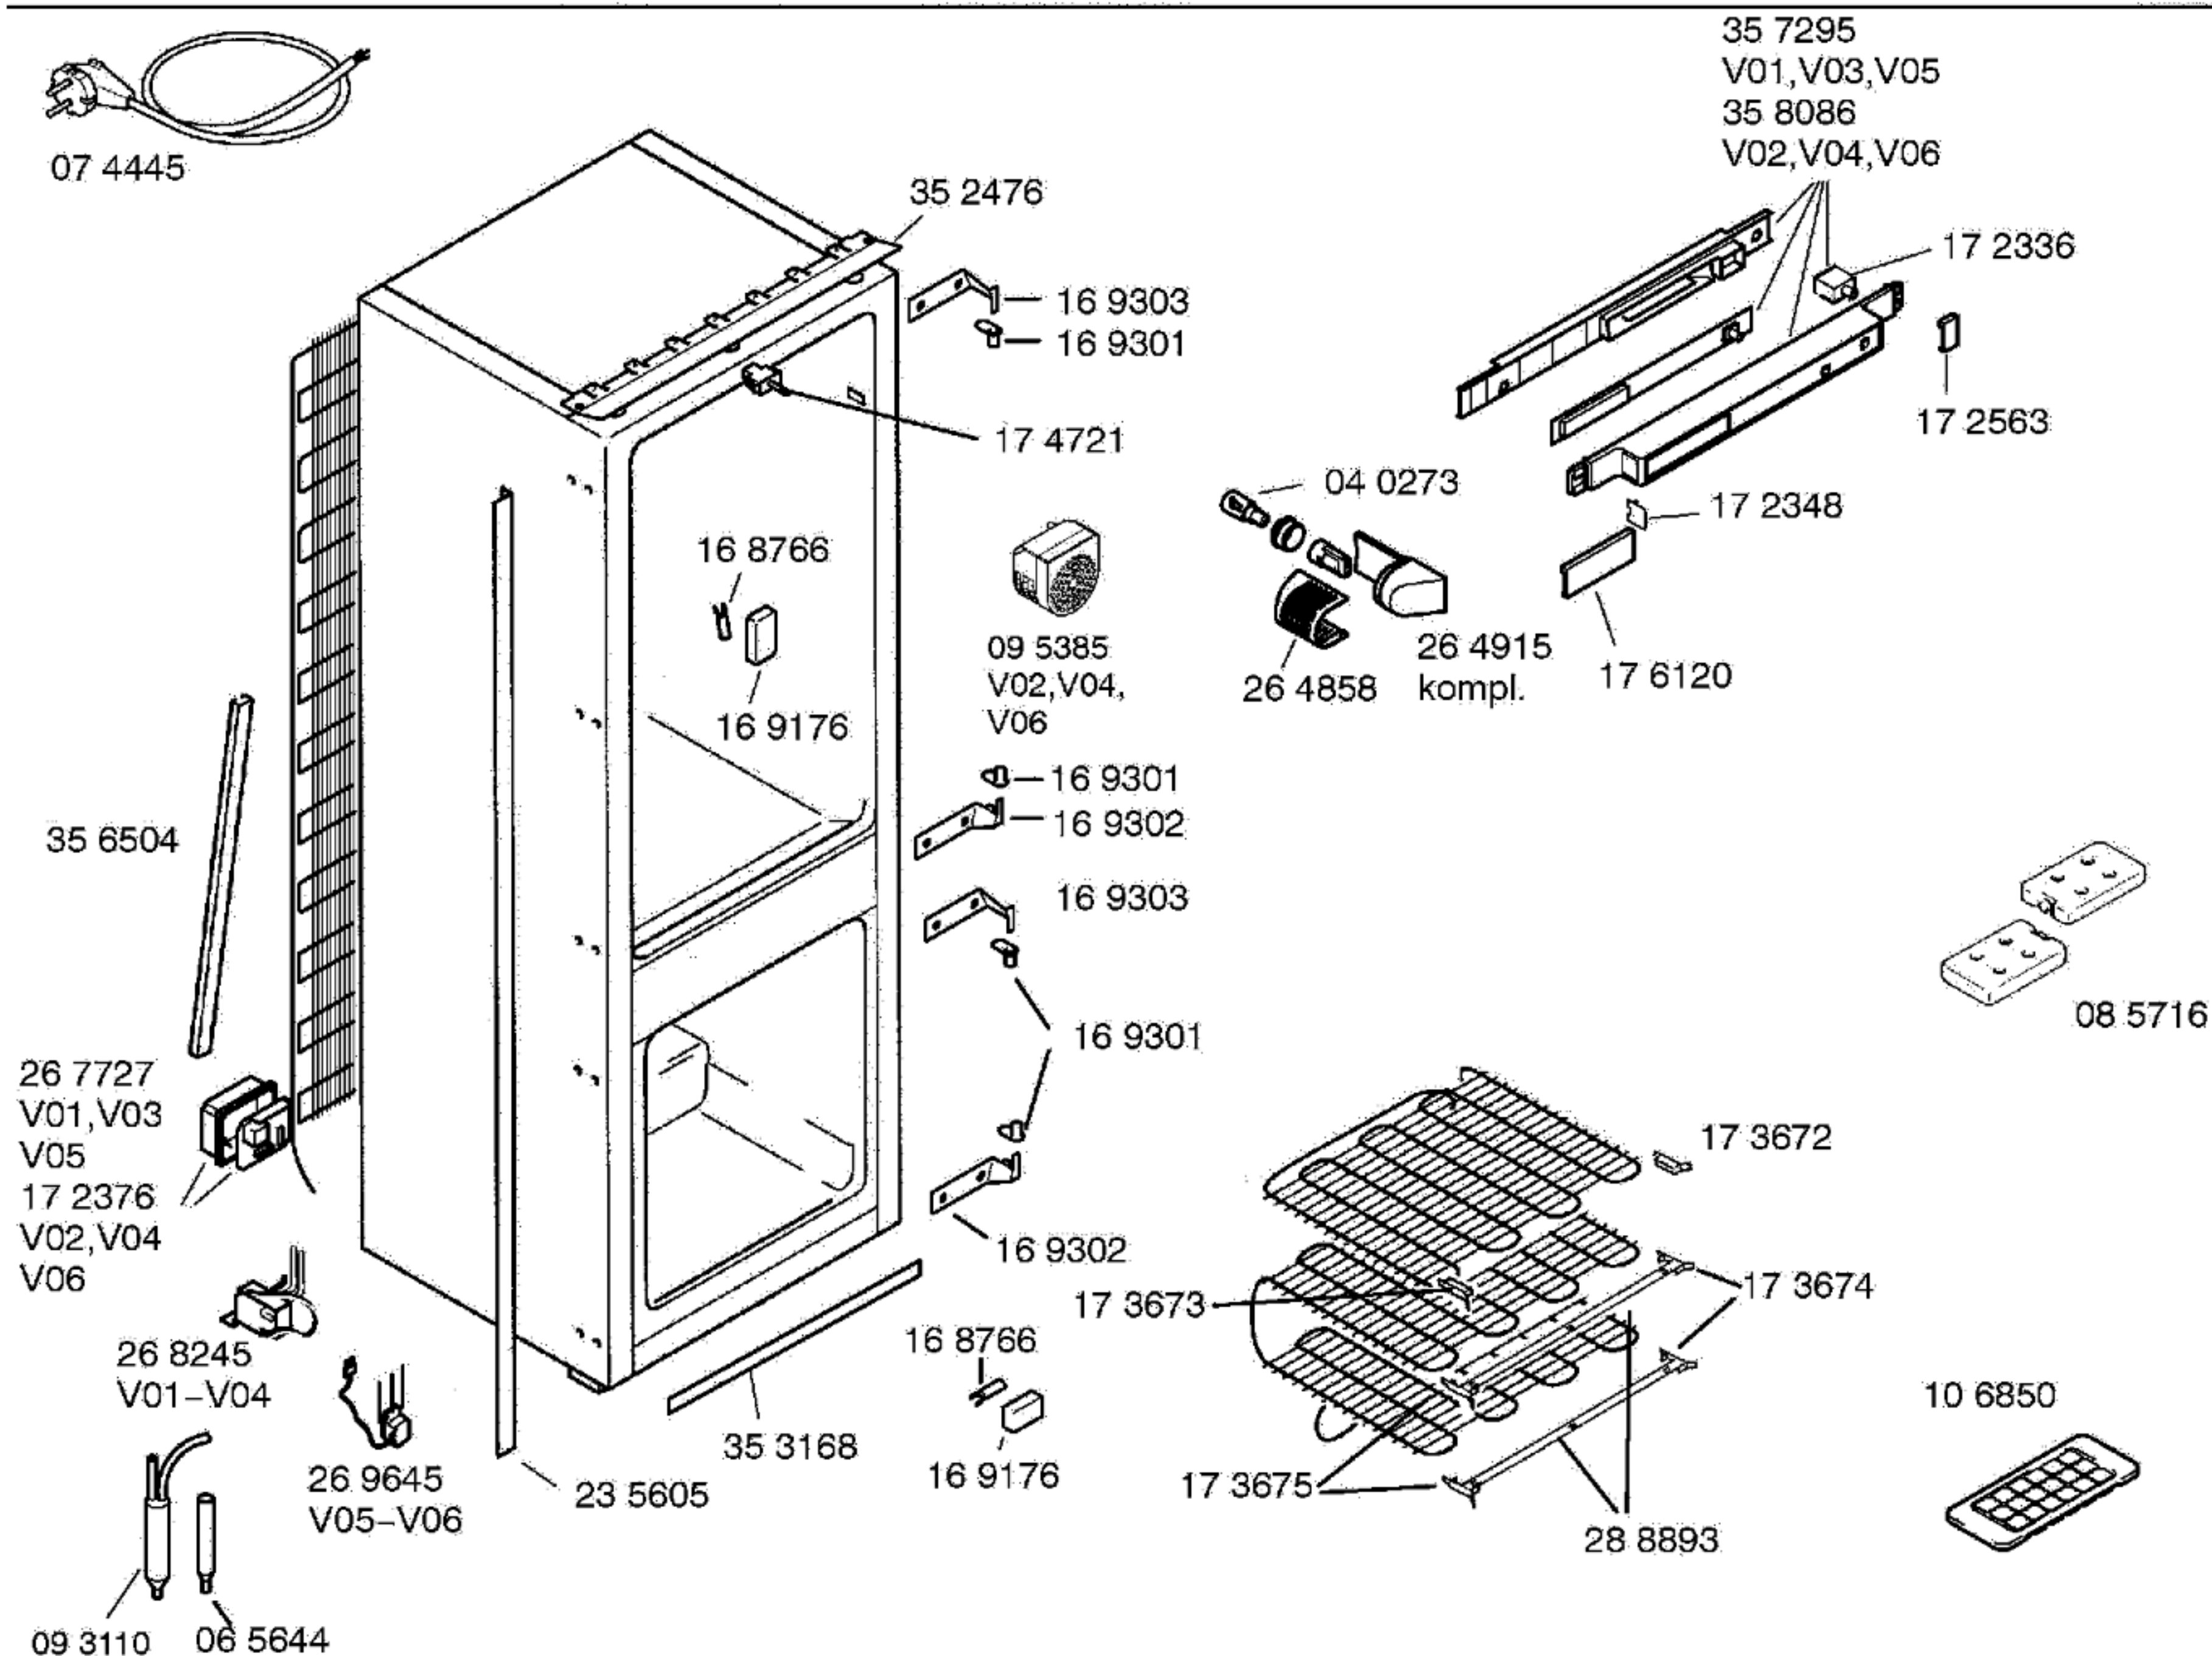


Gebrauchsanweisung
52 5556
(D, GB, F, I, NL, S, E, DK, N, S)

Montageanleitung
521893
(D, GB, F, I, NL, S, E, DK, N, S)

Befestigungssatz
26 8447

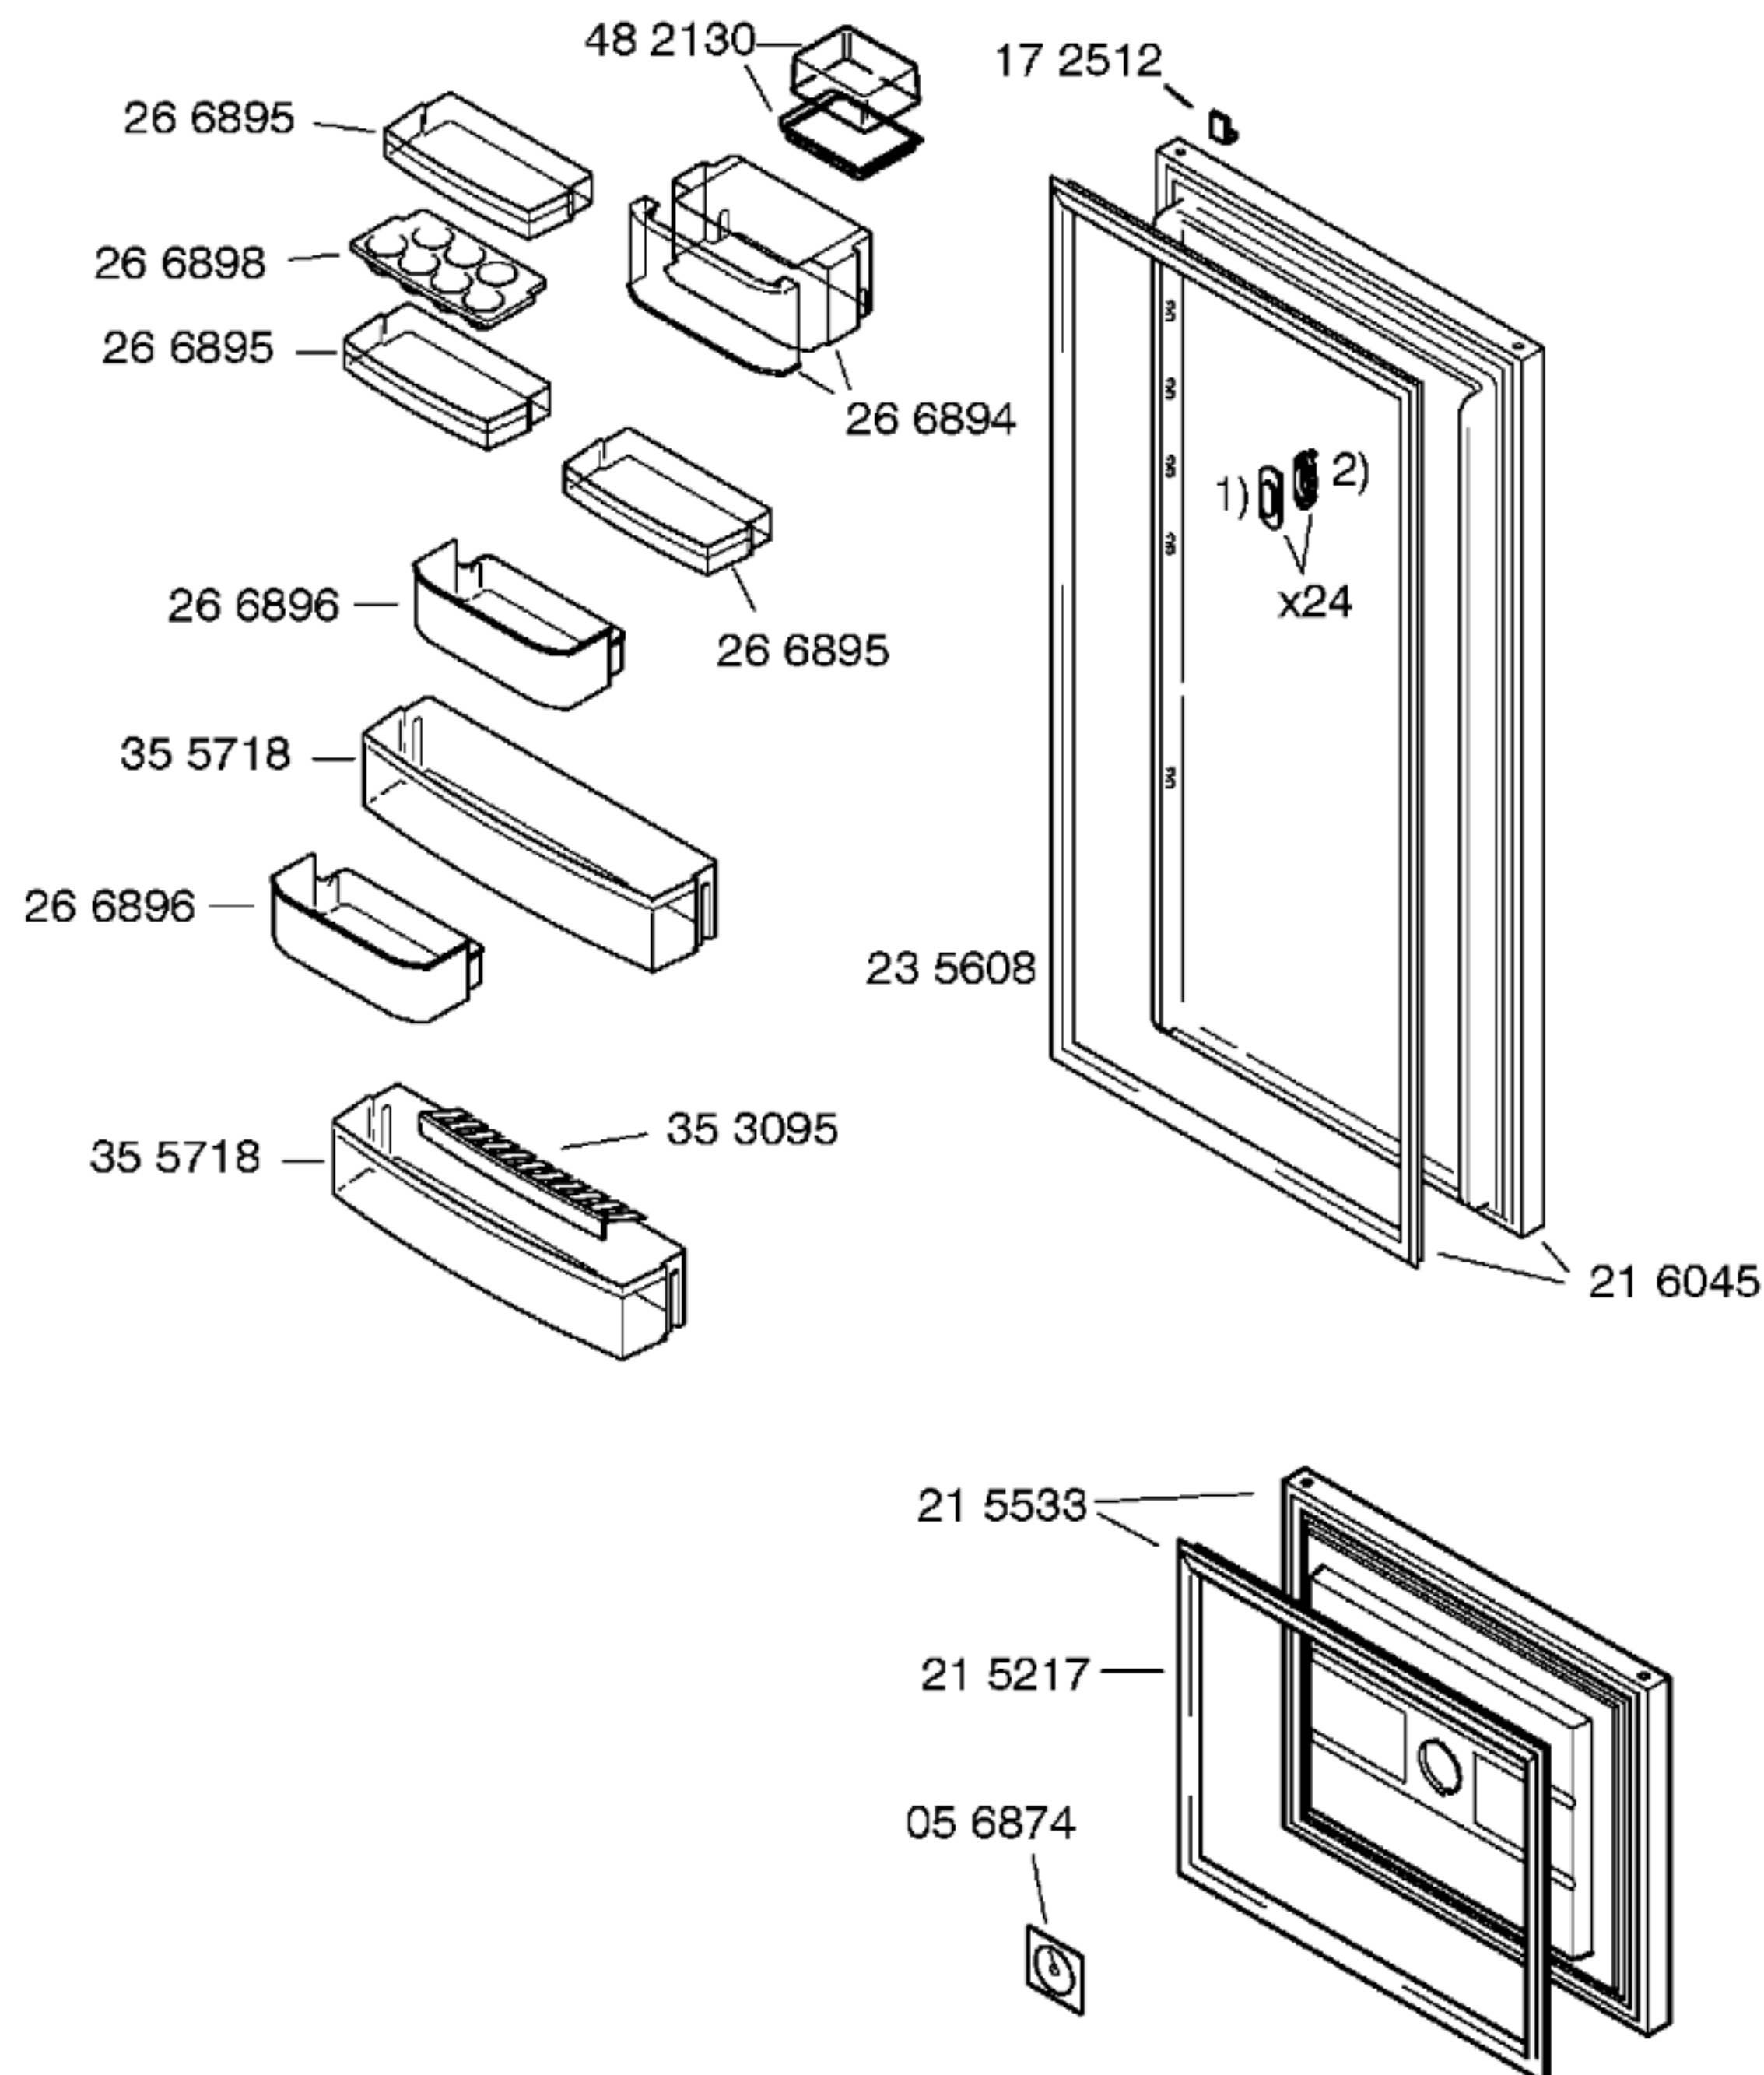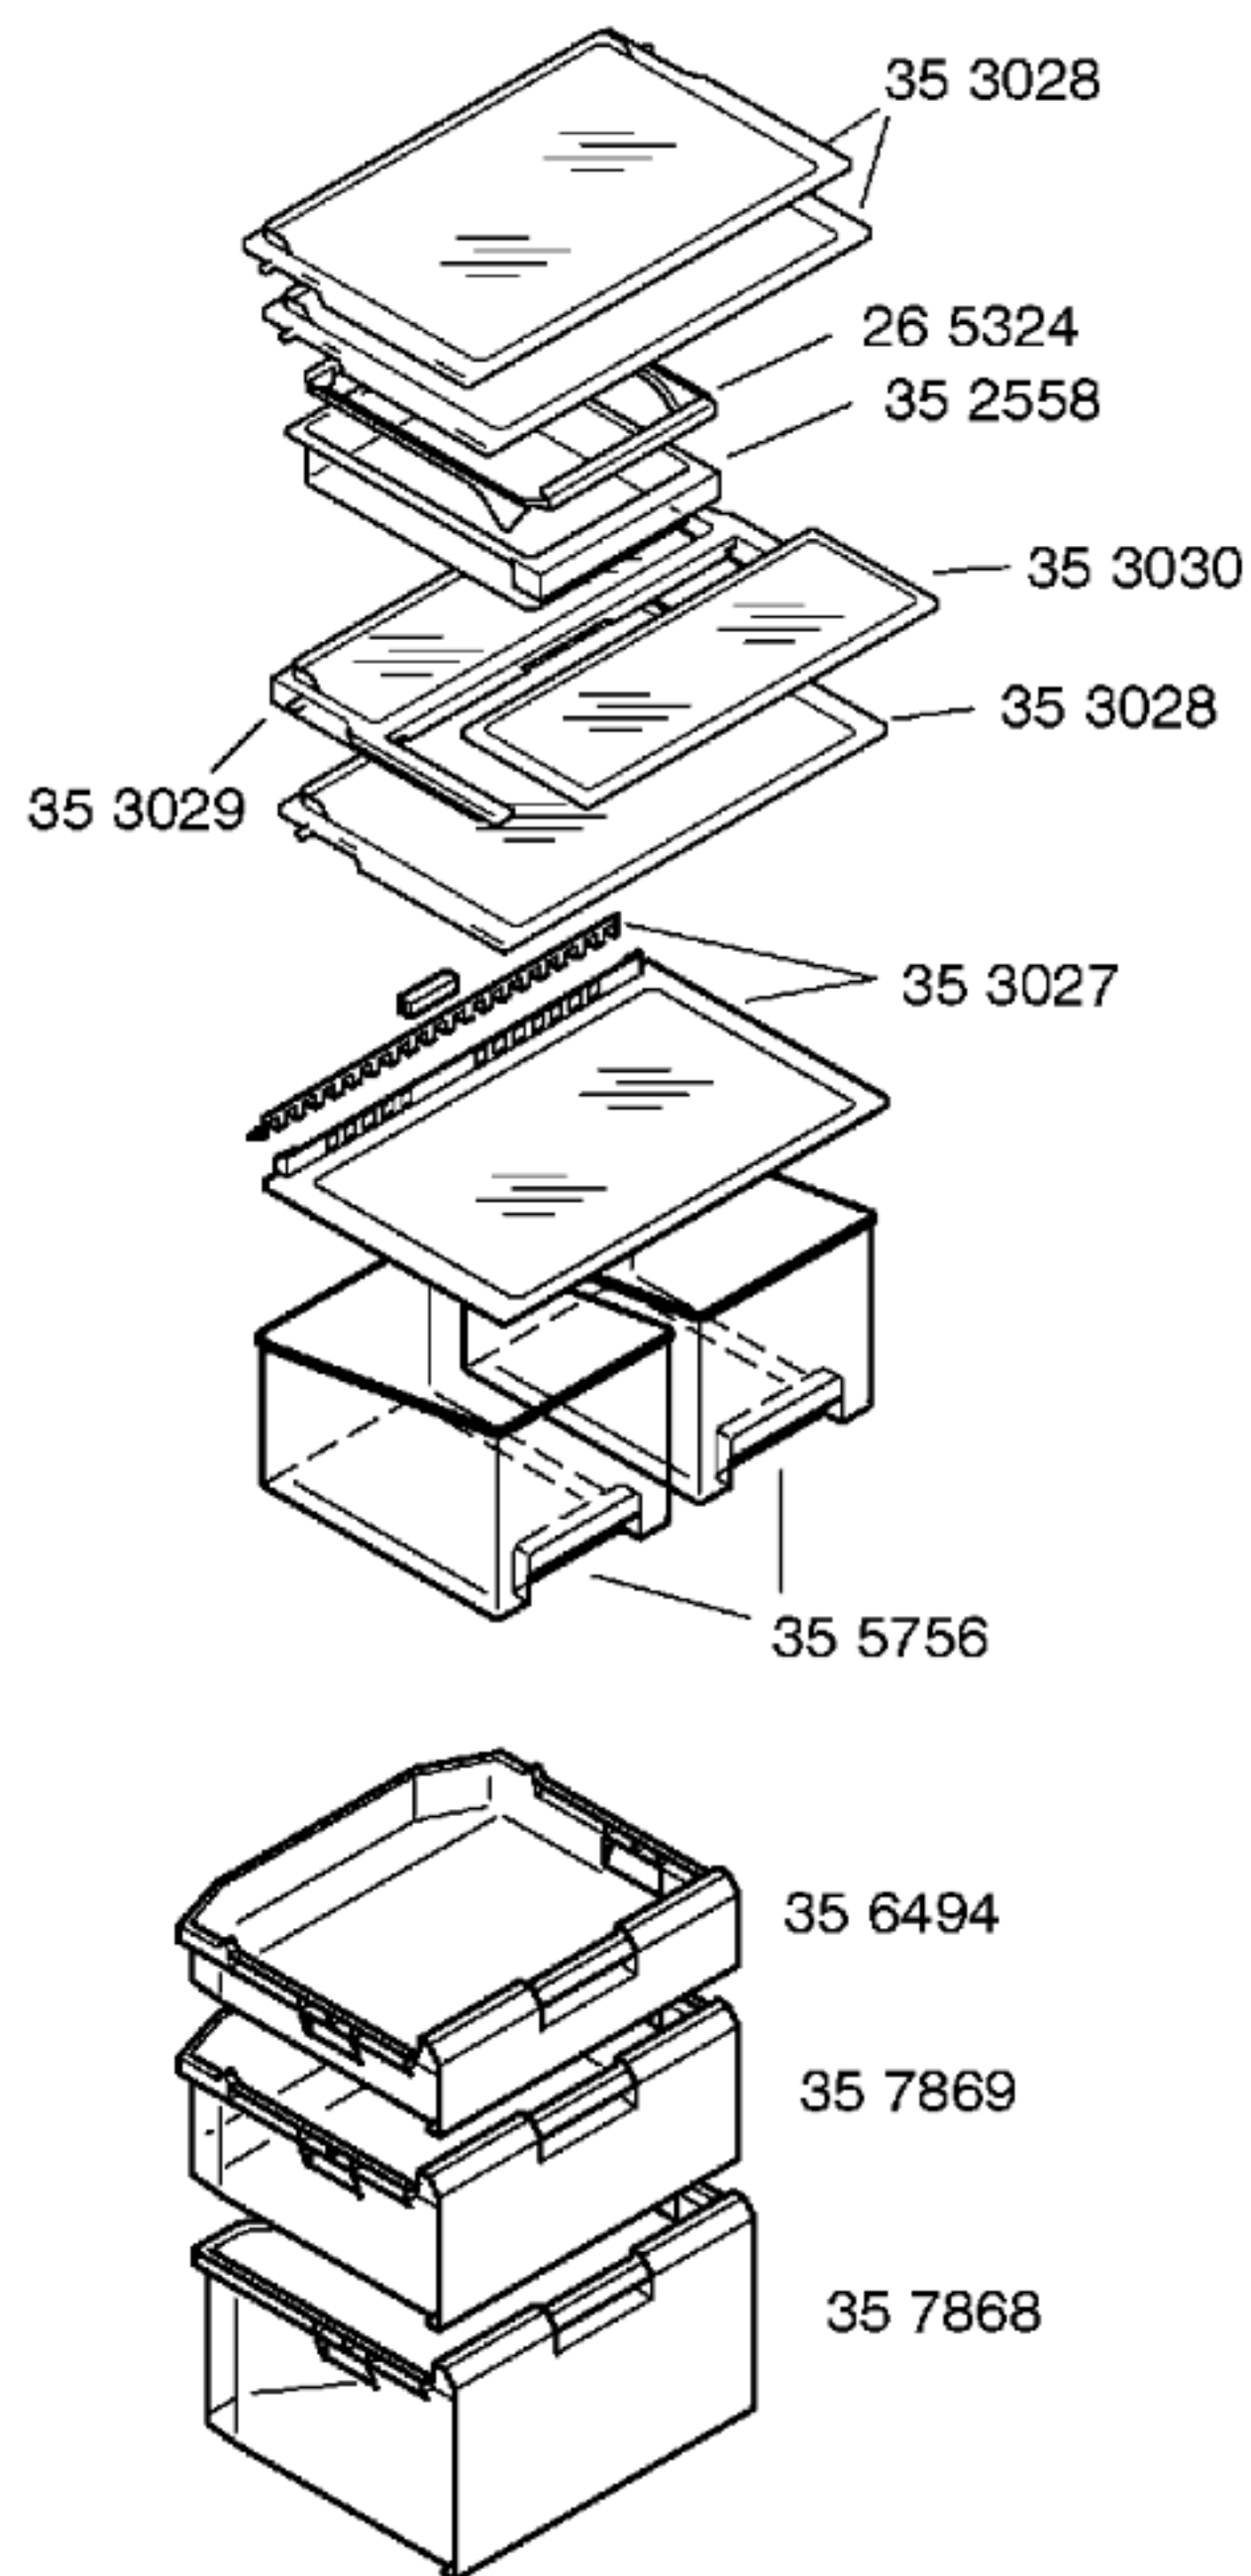

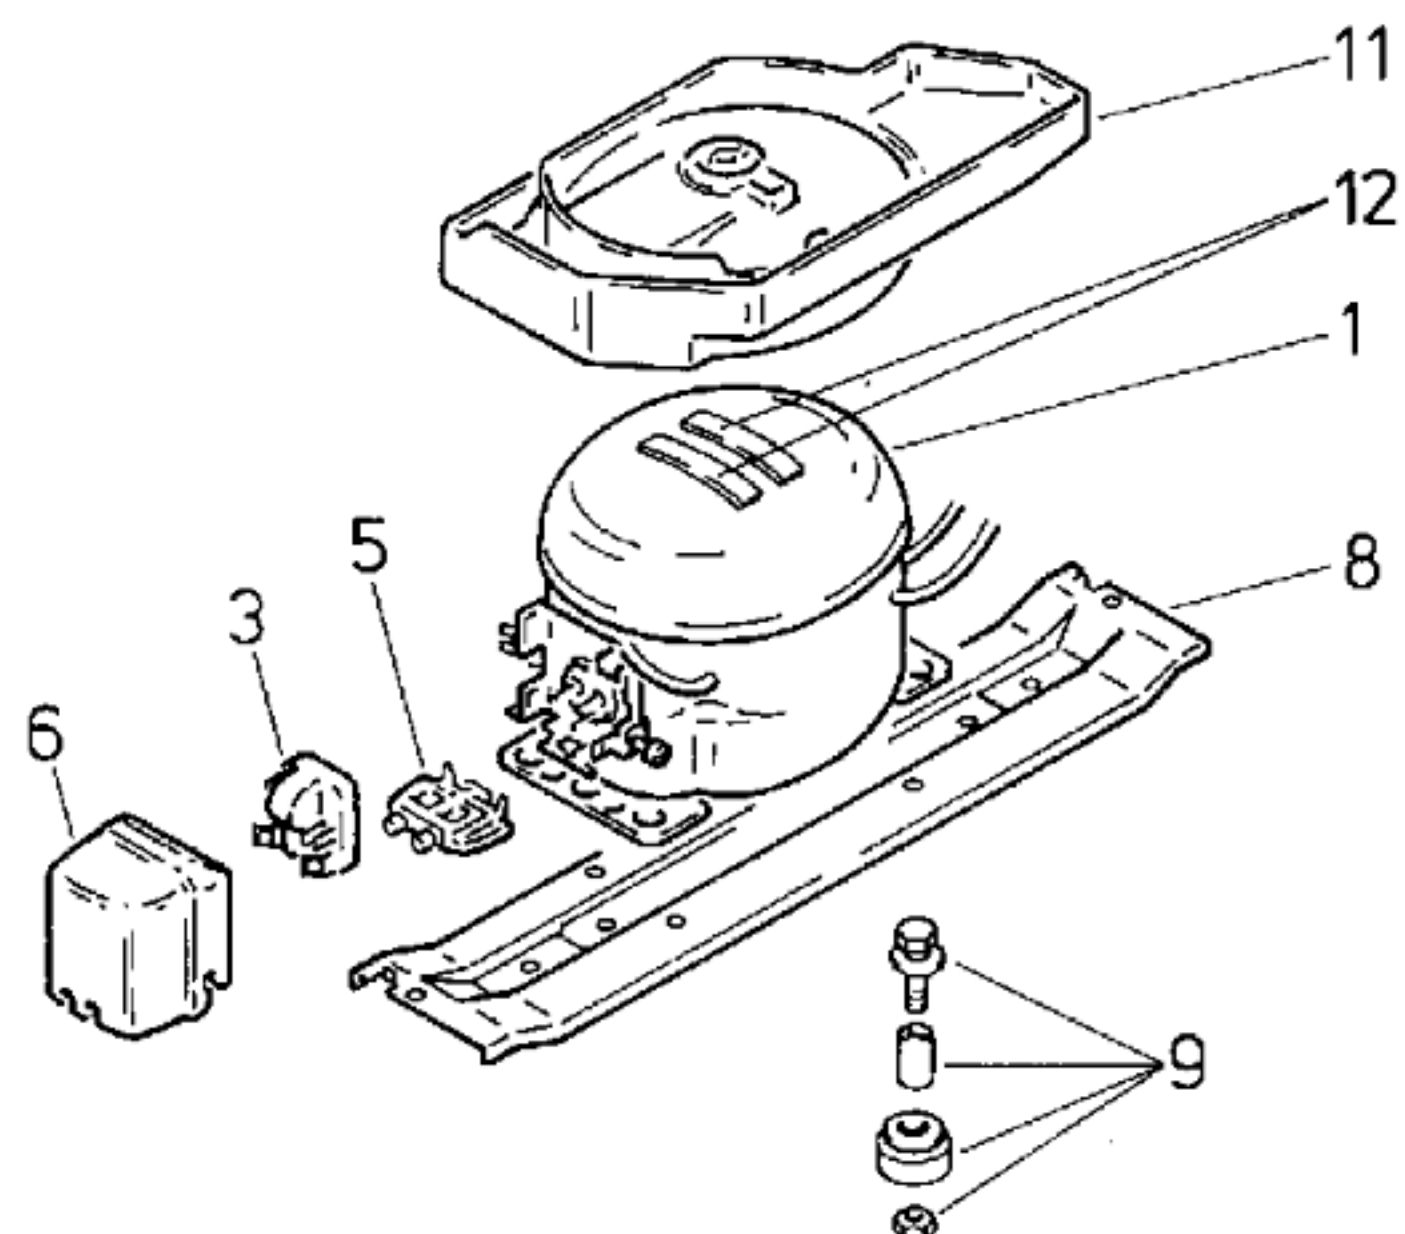

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita	Matsushita	
Typ/Type		DC110E	DC110E	
Förderleistung/Delivery/Débit	l/h	1954	1954	
Anlaufstrom/Starting current/Cour. de démarrage	A	8,6		
Widerstand/Resistance/Résistance	Ha/main/prin.	14,2		
	Hi/aux	12,8		
Temp.-Regler/Thermostat		RCO K59		
Typ/Type		KER		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/	„ein“ °C	+4,5	+4,5	
Valeurs de commutation	„aus“	-32,0	-21	
(„abtauen“ od.)	„alarm“			
Füllmenge/Fill.quantity/Charge	R600a	g	*	
Anschlußwert/Conn.load/Puiss. connectée	W	106		
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	Ω			
Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω			
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			

* siehe Typenschild

Pos.	V01-V02	V03-V06	
	Matsushita	Matsushita	
	DC110 E	DC110 E	
1	14 1946	14 2130	
2			
3	17 2671	17 2671	
4			
5	16 2549	16 2549	
6	16 6782	16 6782	
7			
8	28 1825	28 1825	
9	05 0166	05 0166	
10			
11	26 6624	26 6624	
12	05 6008	05 6008	