


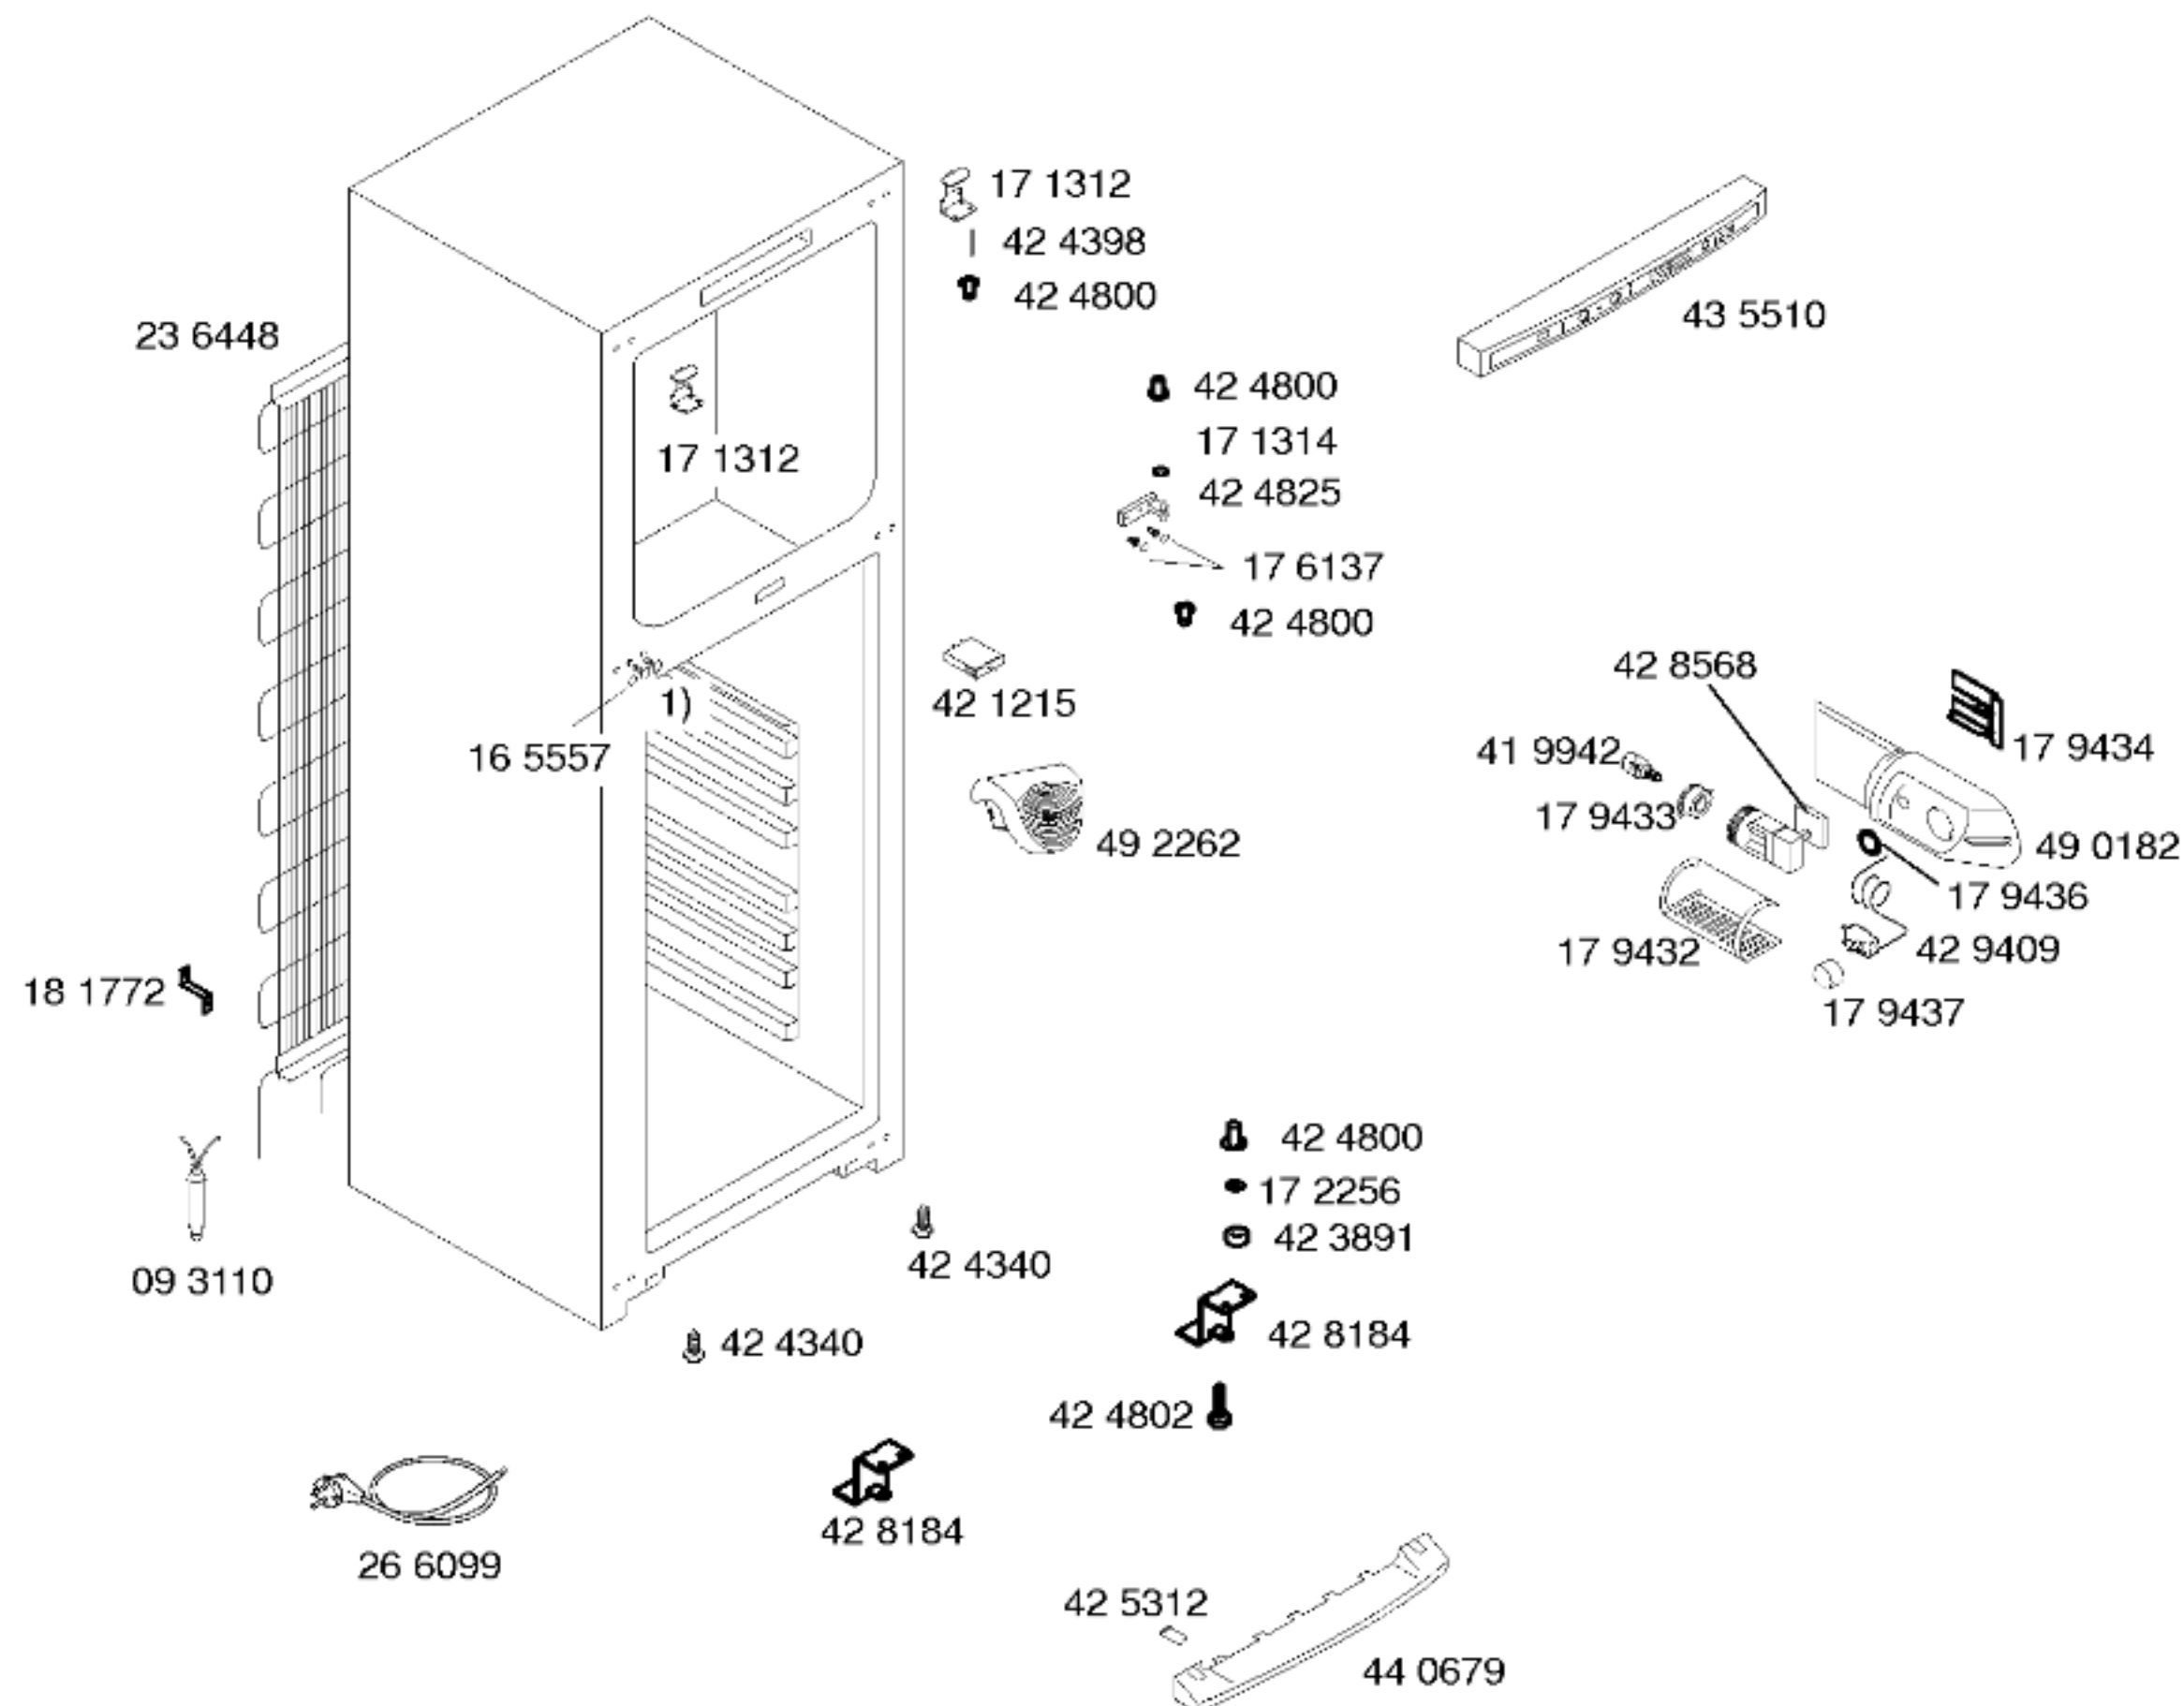


Gebrauchsanweisung
59 1076
(DE,EN,ES,PT)

1) 16 5552

Mat. – Nr. – Konstante
3740

- 1) 16 5557
- 2) 16 6484
- 3) 17 1321
- 4) 43 5525







35 4598






48 0527




16 3401

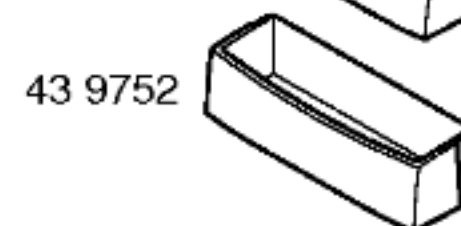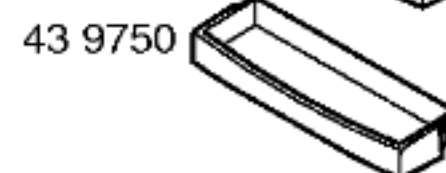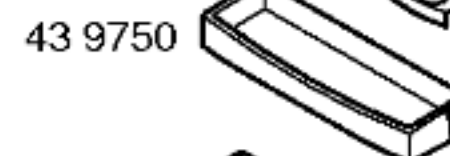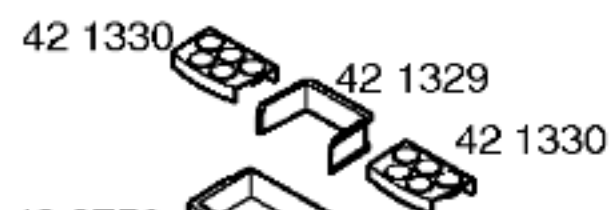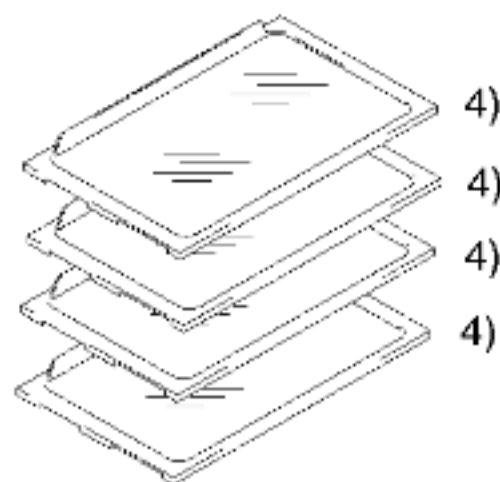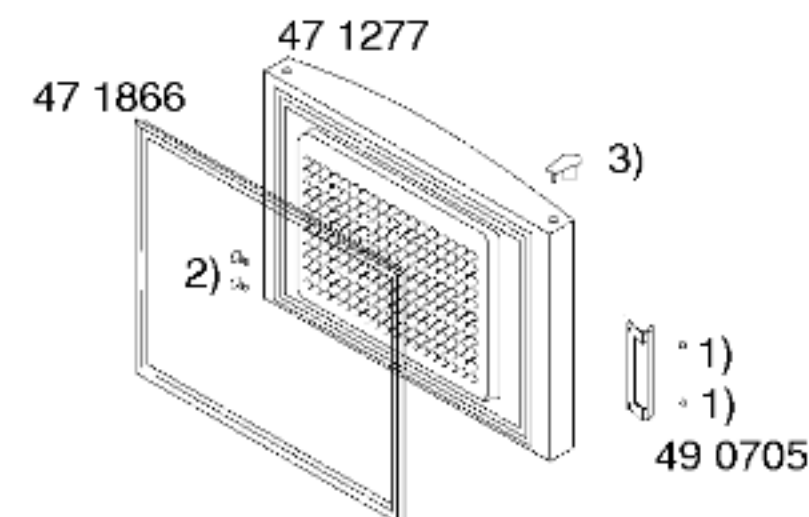

35 3095

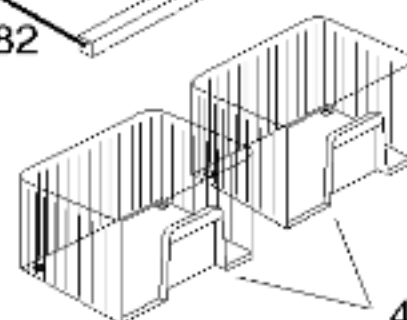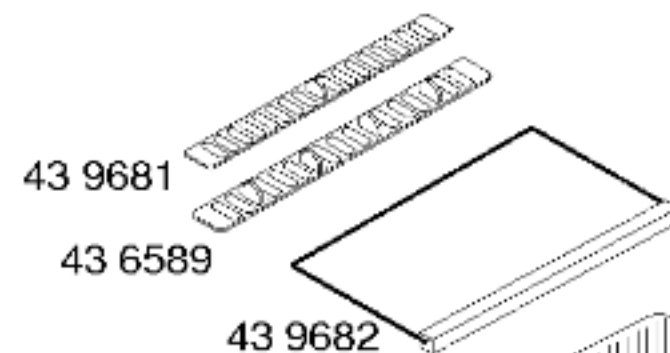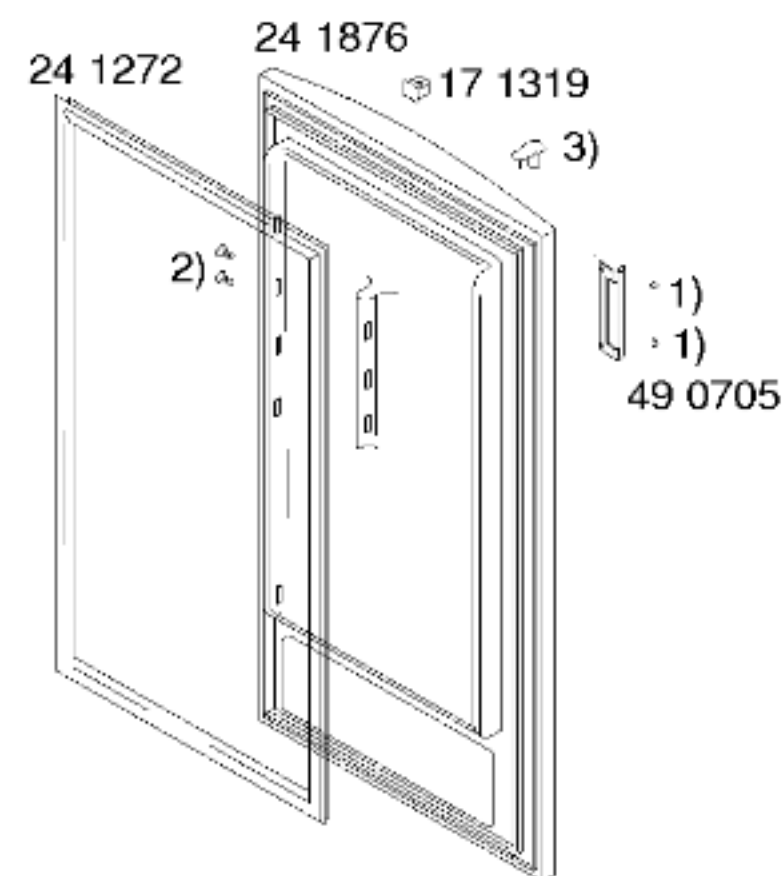

43 4571

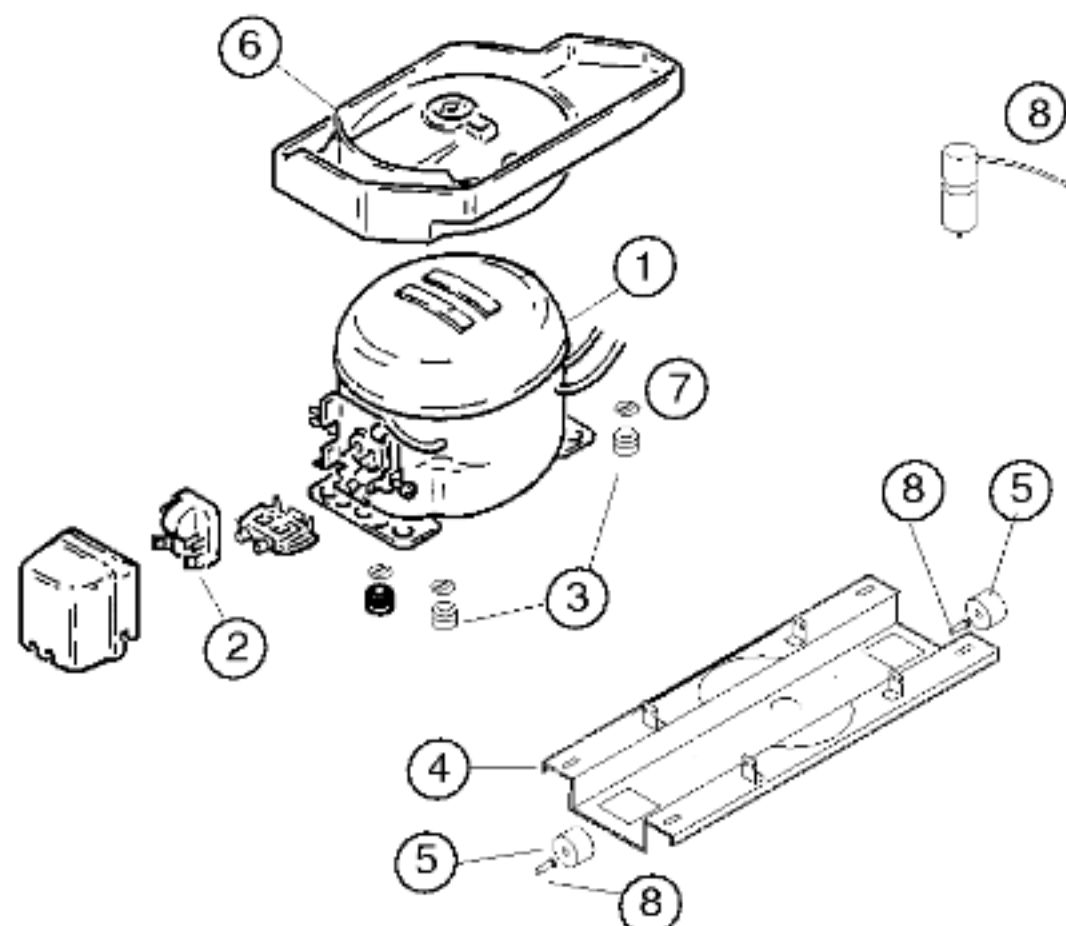

Pos.	Matsushita		
	DC125E12		
1	14 2169		
2	18 3872		
3	16 3427		
4	35 4583		
5	17 1318		
6	49 1245		
7	17 1519		
8	18 1014		
9	17 4093		
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER			
Verdichter/Compressor/Kompresör		Matsushita	
Typ/Type/Tip		DC125E12	
Förderleistung/Delivery/Verim/h		2074	
Anlaufstrom/Starting current/Giris akimi		A	
Widerstand/Resistance/Rezistans Ha/		Ohm	
Hi/aux.		18,0	
Temp.Reyler/Thermostat/Termostat		Danfoss	
Typ/Type/Tip		NLE15K	
Reglerstellung/Position/Termostat pozisyonu			
Schaltwerte/Acma kapama degerleri		..ein/acma °C	+4.5 +4.5
Valeurs de commutation/Termostat degeri		..aus"/kapama	-31 -18
(..abtaven' od)		..alarm'	
Füllmenge/Fill quantity/ Dolum miktarı		R600	g
Anschlusswert/Comm. load/Giris gucu		W	*
Heizung/Heater/Rezistans		Ohm	
Widerstand/Resistance/Direnc		W	
Leistung/Power/Guc			
Ventilador/Blower/Vantilatör		Ohm	
Widerstand/Resistance/Rezistans			
Magnetventil/Magnetic valve/Manyetik valf		Ohm	
Widerstand/Resistance/Rezistans		V	
Spannung/Voltage/Gerilim			
Temp.Reyler/Thermostat/Termostat			

* Siehe Typenschild/Mamul etiketine bakiniz