


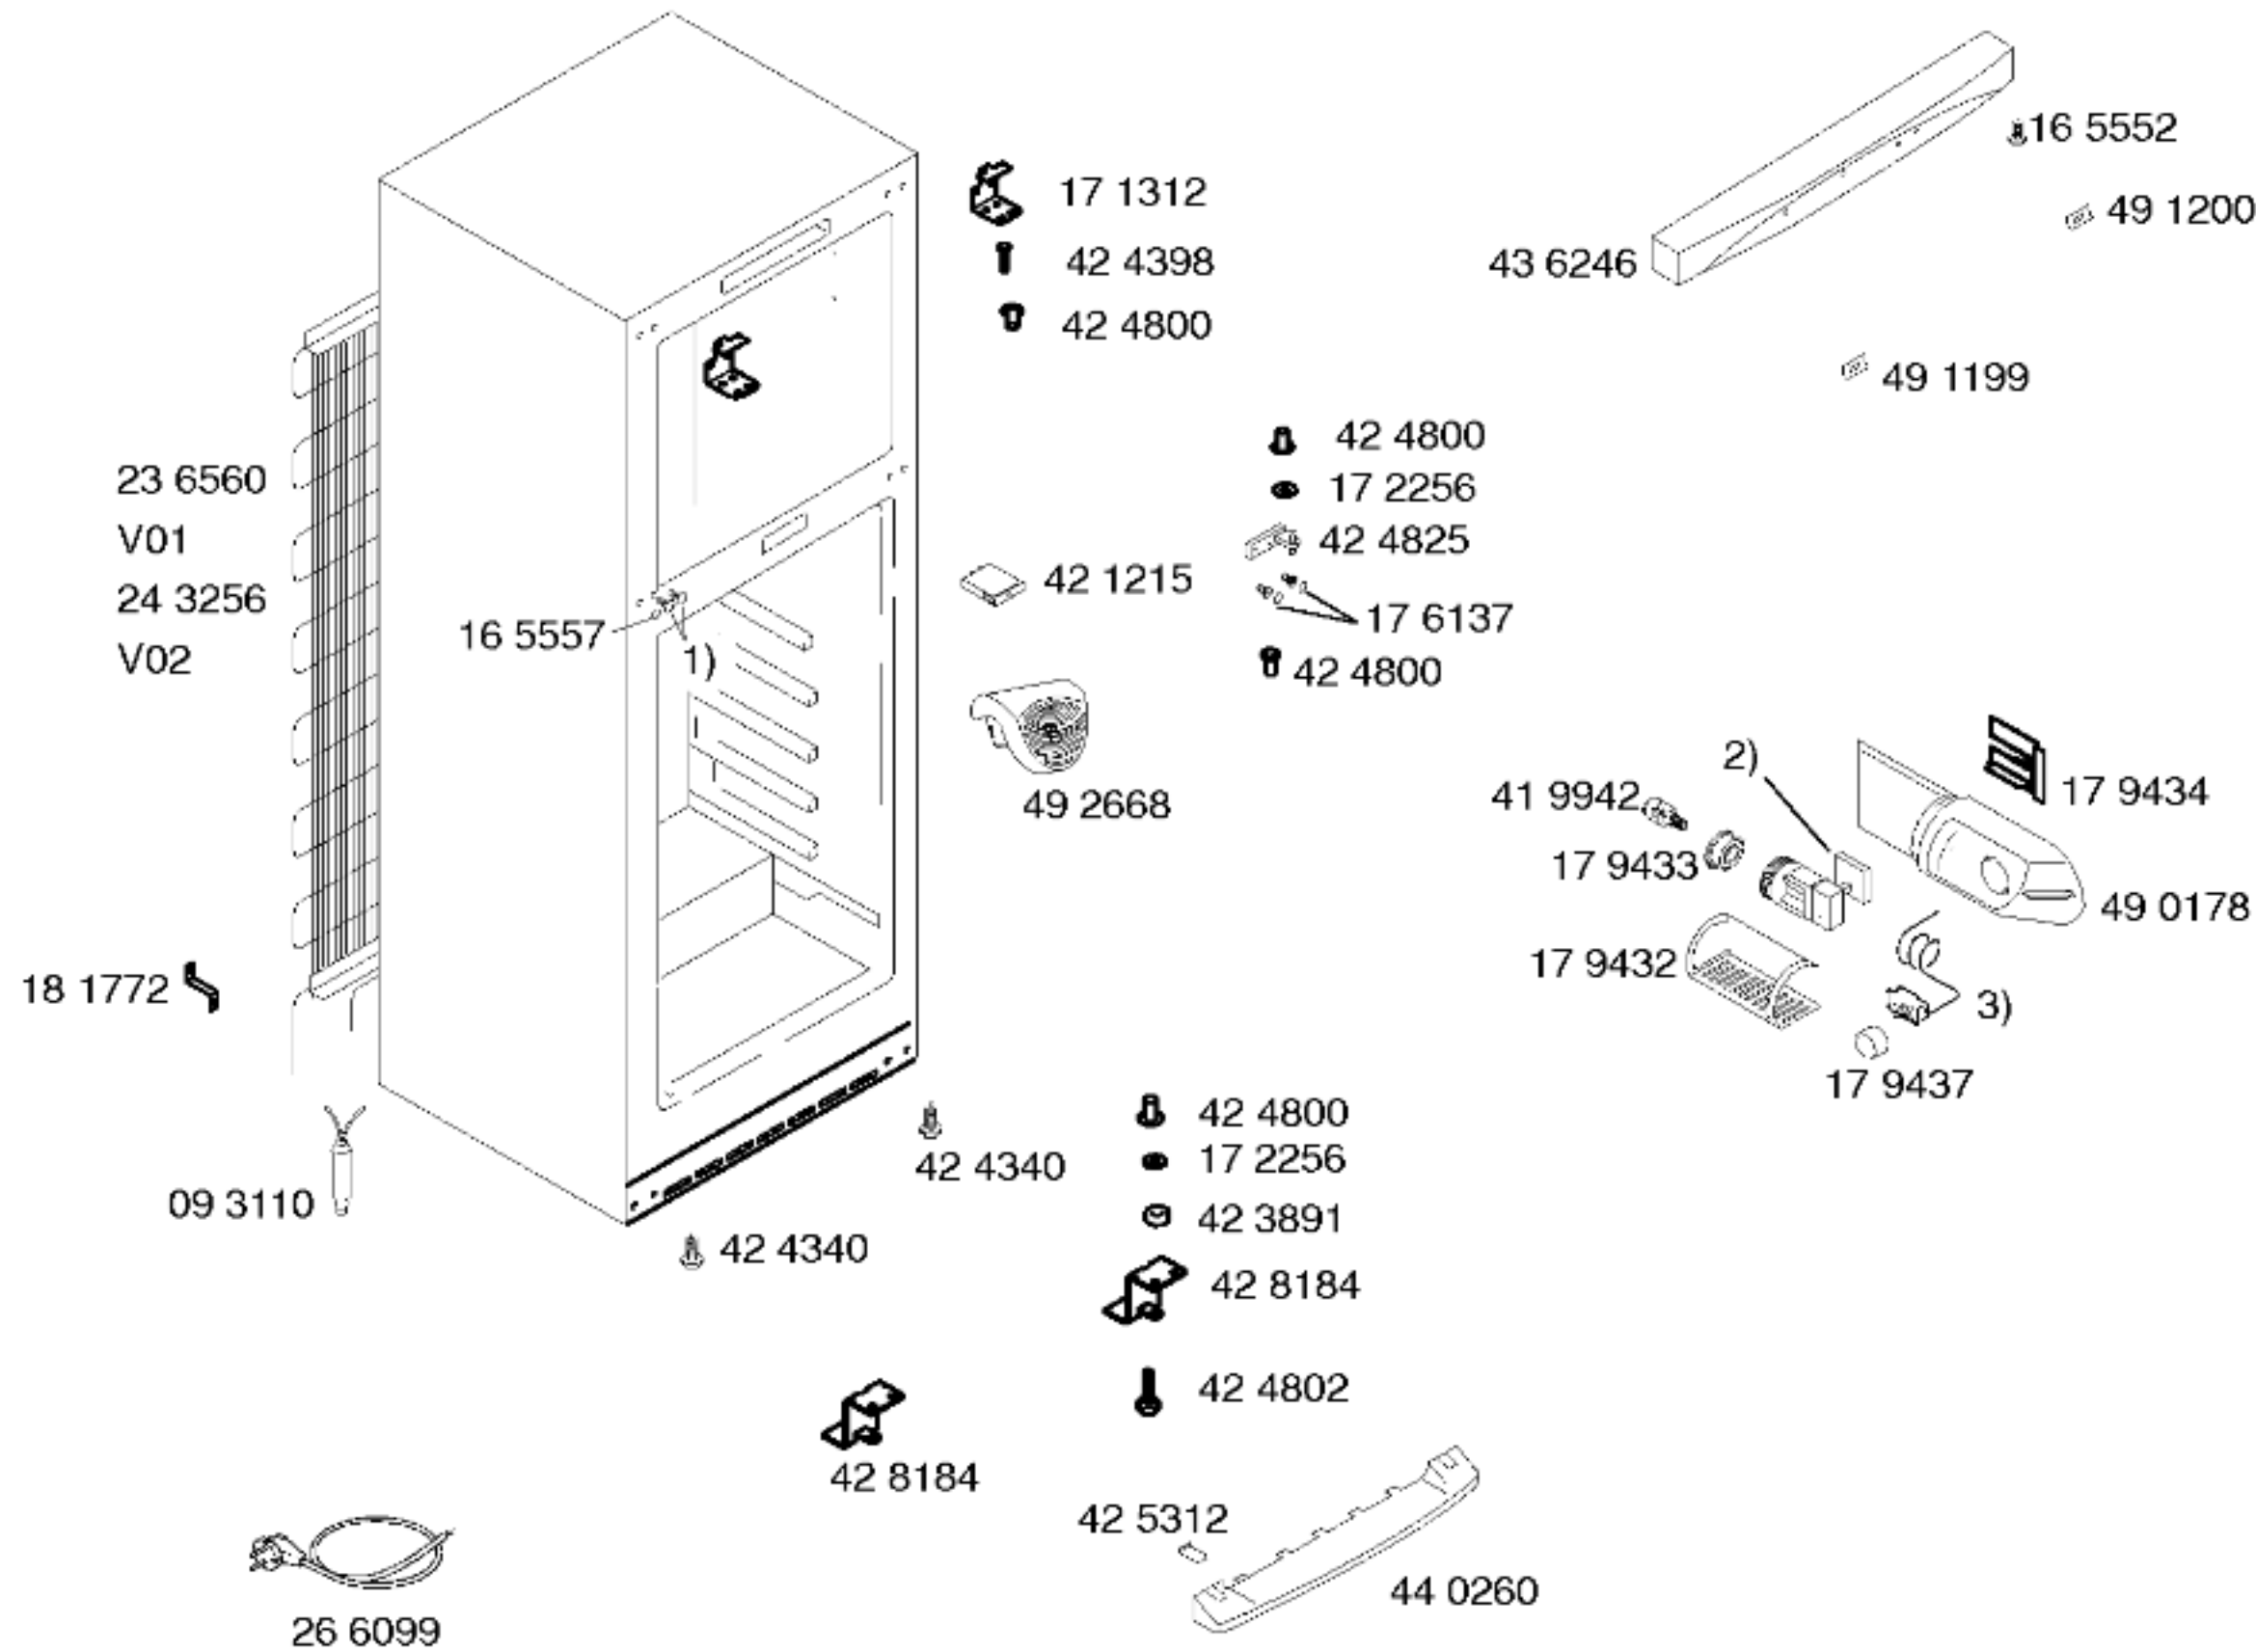

Kullanma kilavuzu
59 1293

(TR)

1) 16 5552

2) 17 9431

V01

42 9410







V02

3) 18 7574


V01

42 9409

V02

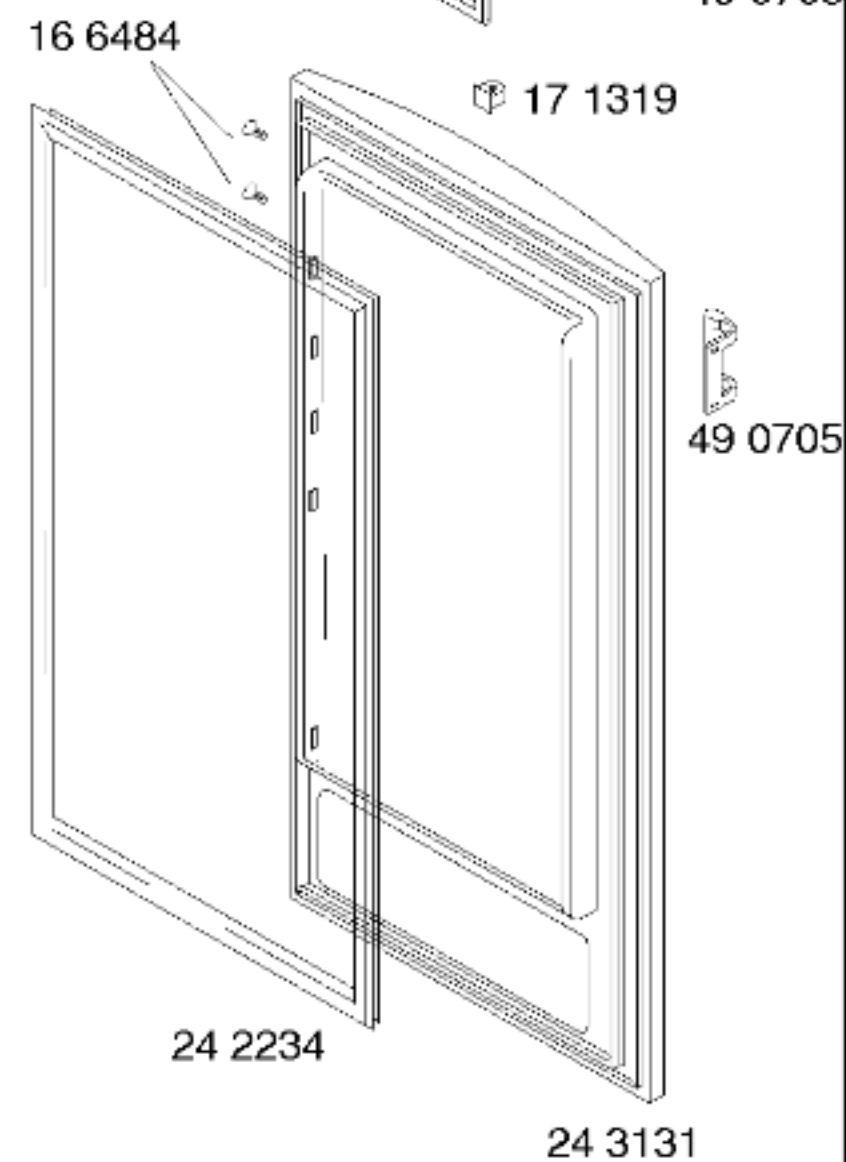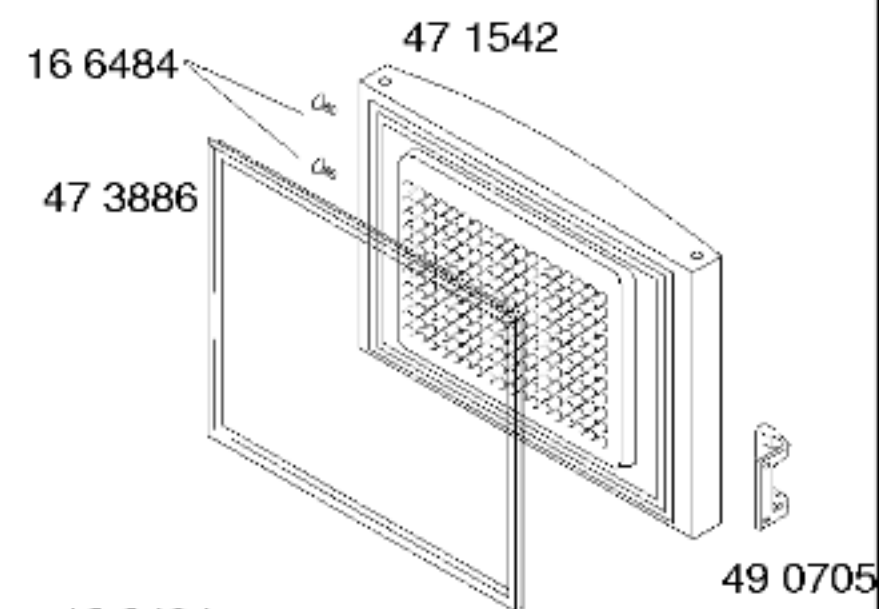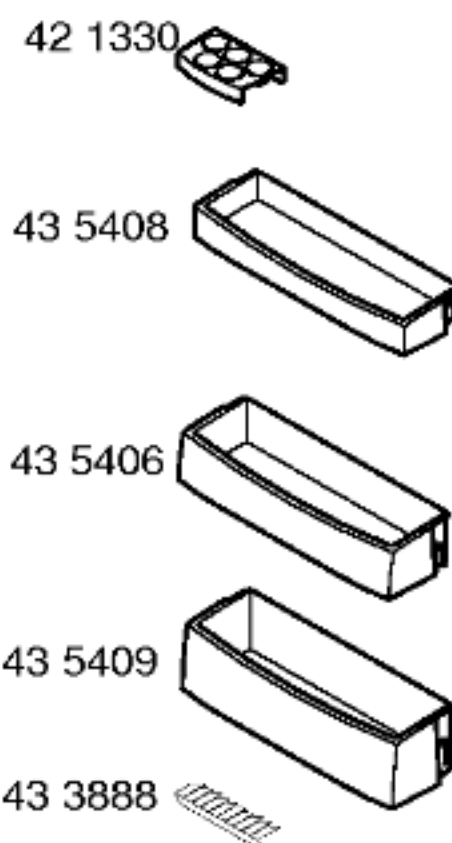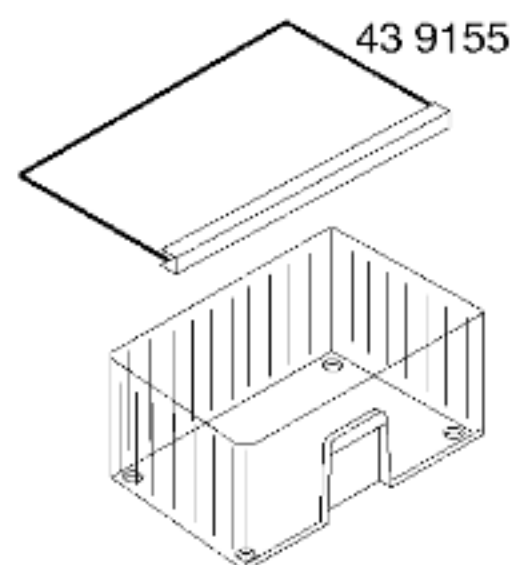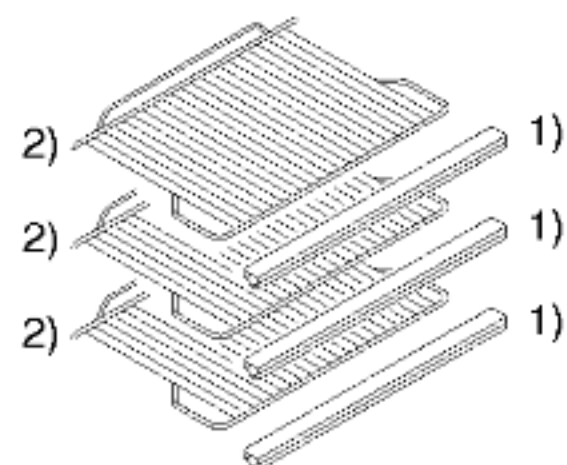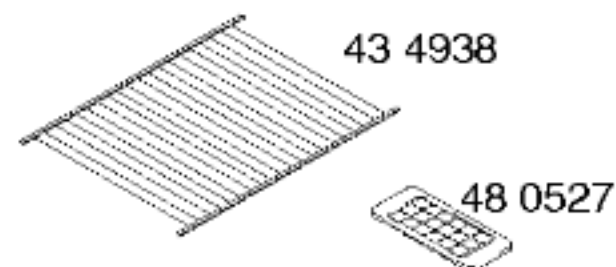

- 1) 44 1144
- 2) 35 4166

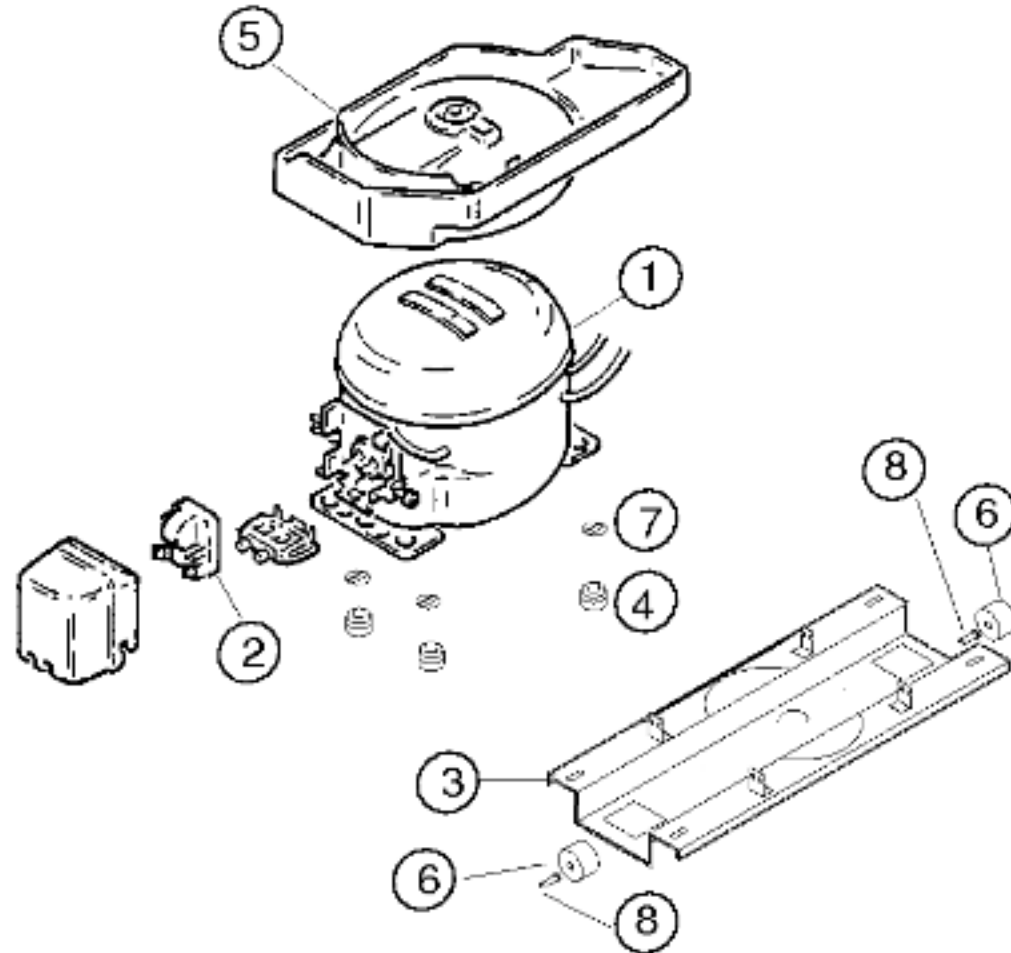

Pos.	Matsushita		
	DC125E15		
1	14 2338		
2	16 5570		
3	35 4158		
4	16 3427		
5	49 4670		
6	17 1318		
7	17 1519		
8	18 1014		
9			
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER

Verdichter/Compressor/Kompresör Typ/Type/Tip Förderleistung/Delivery/Verim/h Anlaufstrom/Starting current/Giris akimi Widerstand/Resistance/Rezistans Ha/ Hi/aux.	Matsushita DC125E15 A Ω Ω		
Temp.Reyler/Thermostat/Termostat Typ/Type/Tip Reglerstellung/Position/Termostat pozisyonu Schaltwerte/Actua kapama degerleri Valeurs de commutation/Termostat degeri (..abtaven' od)	Danfoss ..ein/acma °C ..aus"/kapama ..alarm'	+4.5 +4.5 -31 -18	
Füllmenge/Fill. quantity/ Dolum miktarı	R600a	g	
Anschlusswert/Comm. load/Giris gucu	W		
Heizung/Heater/Rezistans Widerstand/Resistance/Direnc Leistung/Power/Guc	Ω W		
Ventilador/Blower/Vantilatör Widerstand/Resistance/Rezistans	Ω		
Magnetventil/Magnetic valve/Manyetik valf Widerstand/Resistance/Rezistans Spannung/Voltage/Gerilim	Ω V		
Temp.Reyler/Thermostat/Termostat			

* Siehe Typenschild/Mamul etiketine bakınız