




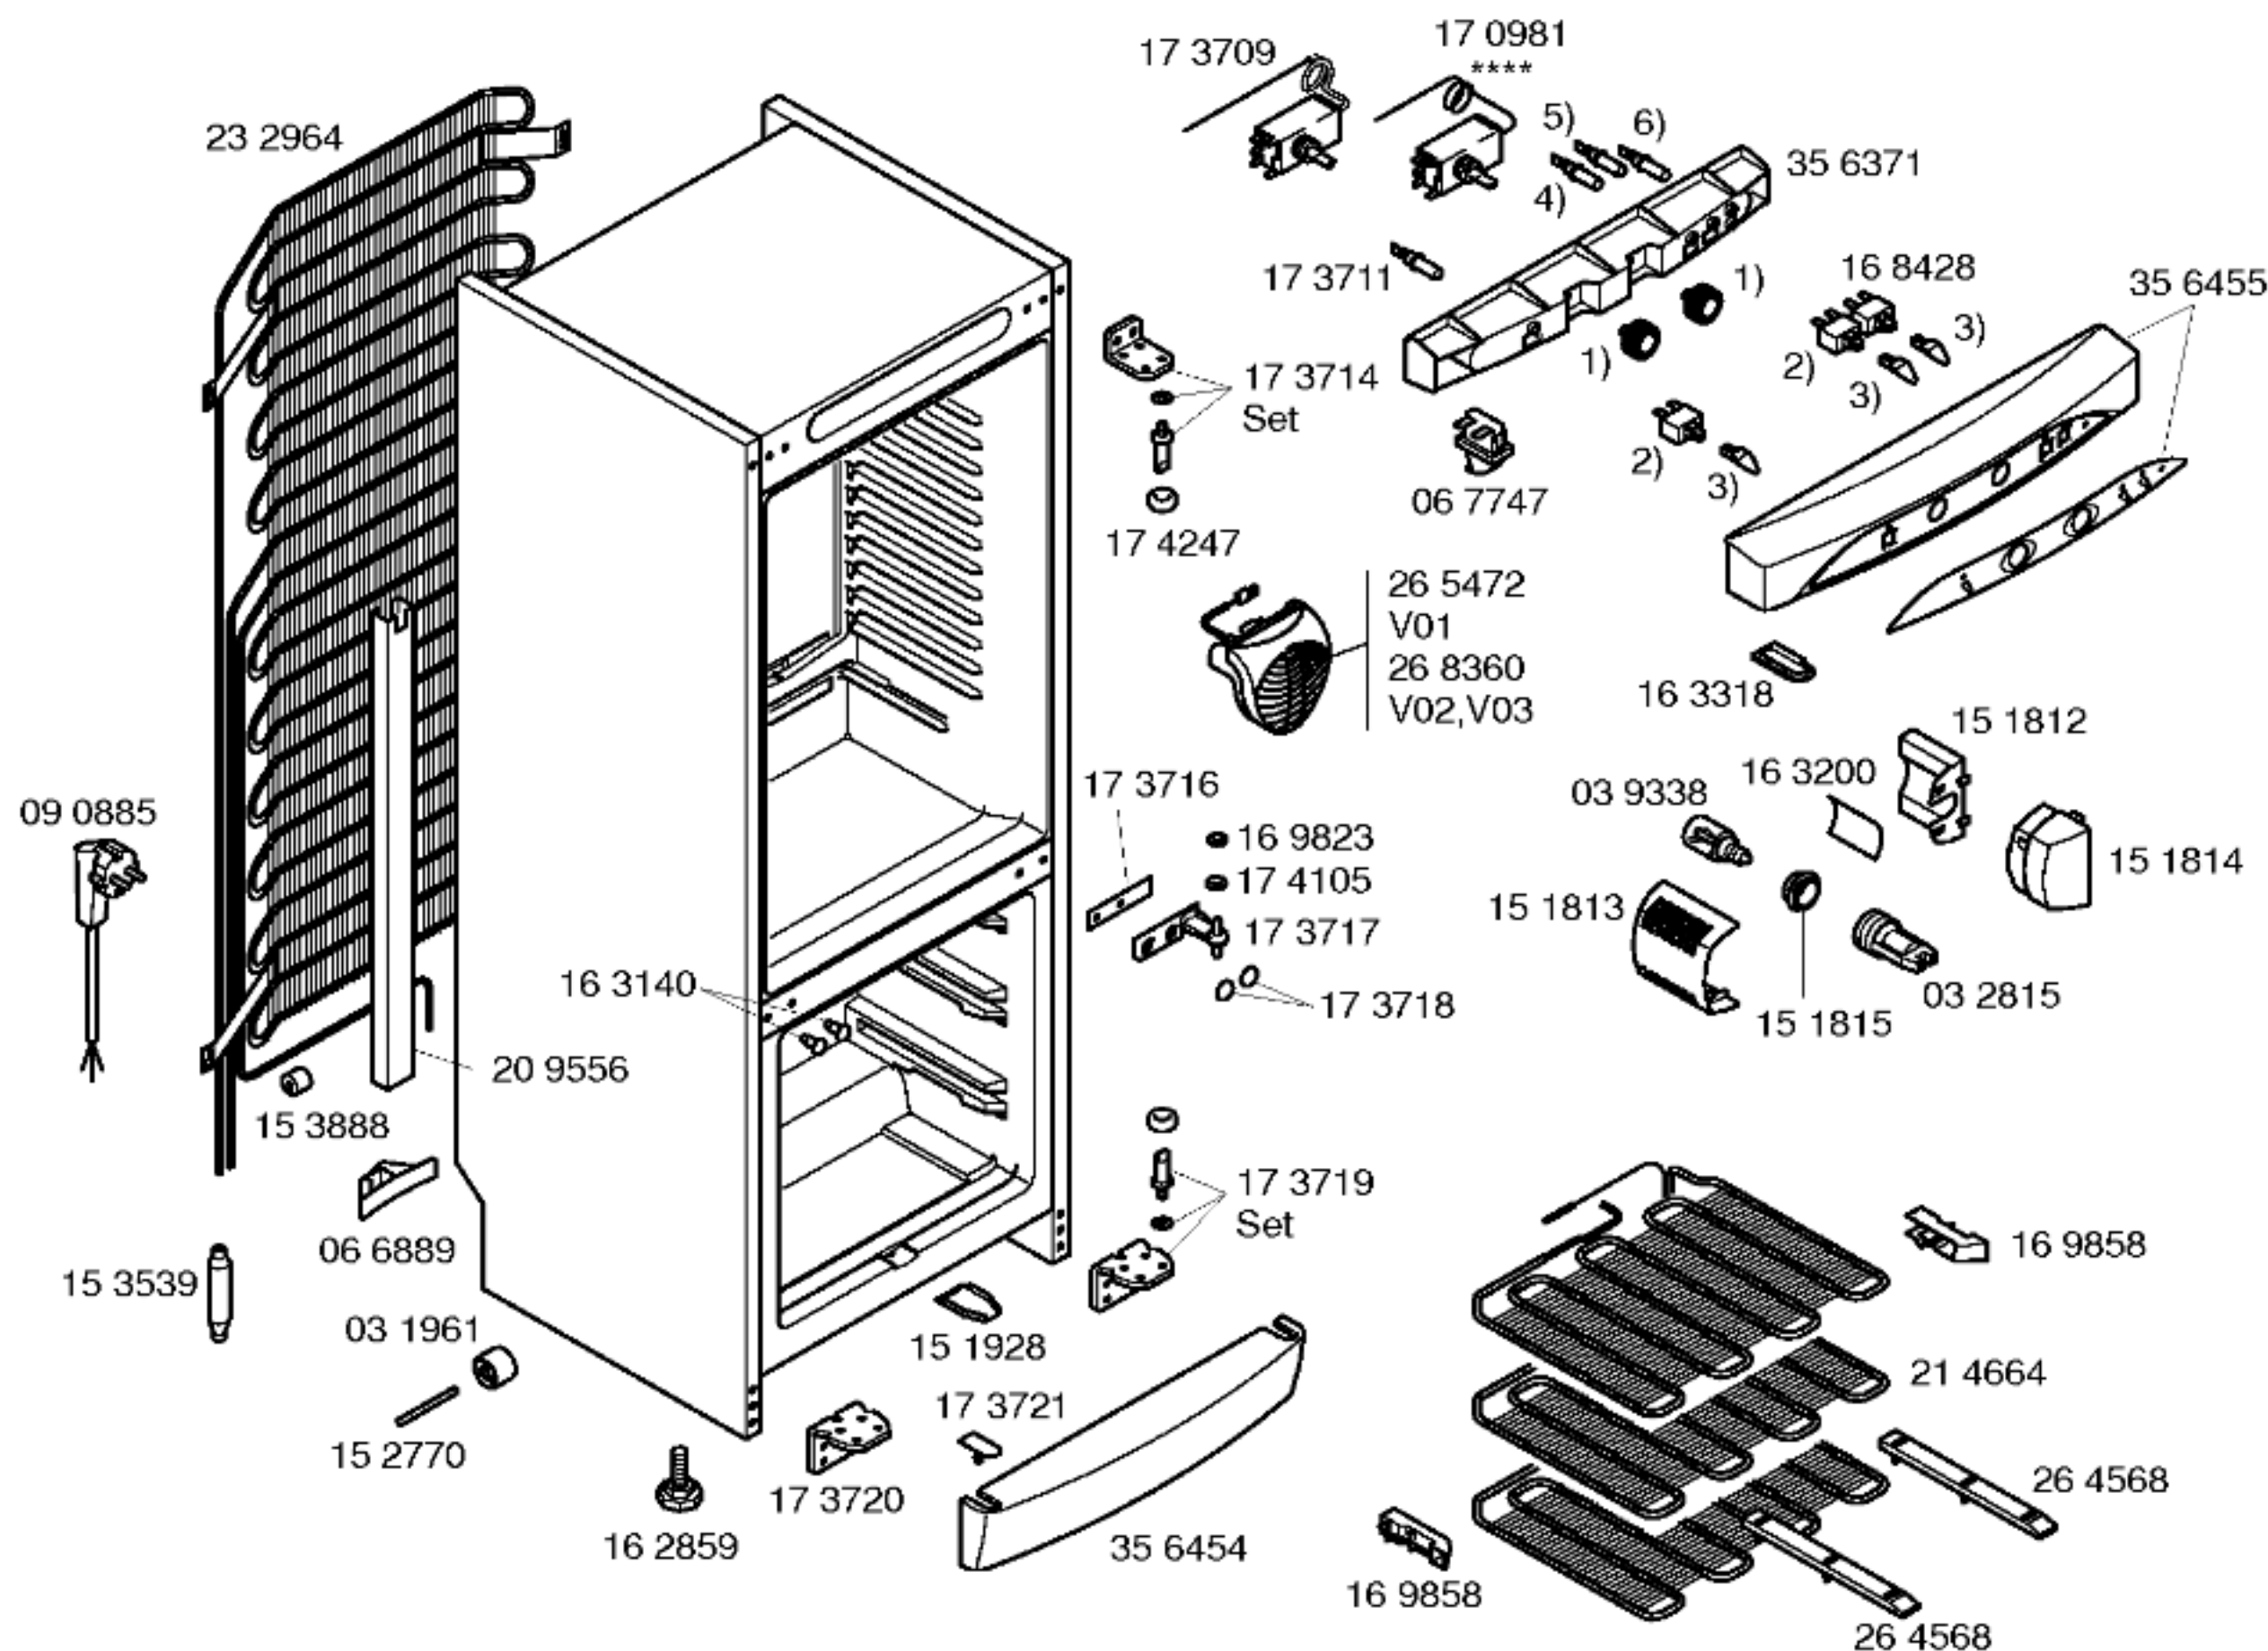

Libro de instrucciones
52 4219
(E,P,GB,F)

- 1) 16 5458
- 2) 16 8427
- 3) 17 3835
- 4) 17 3711 Verde
- 5) 17 3712 Ambar
- 6) 17 3713 Rojo

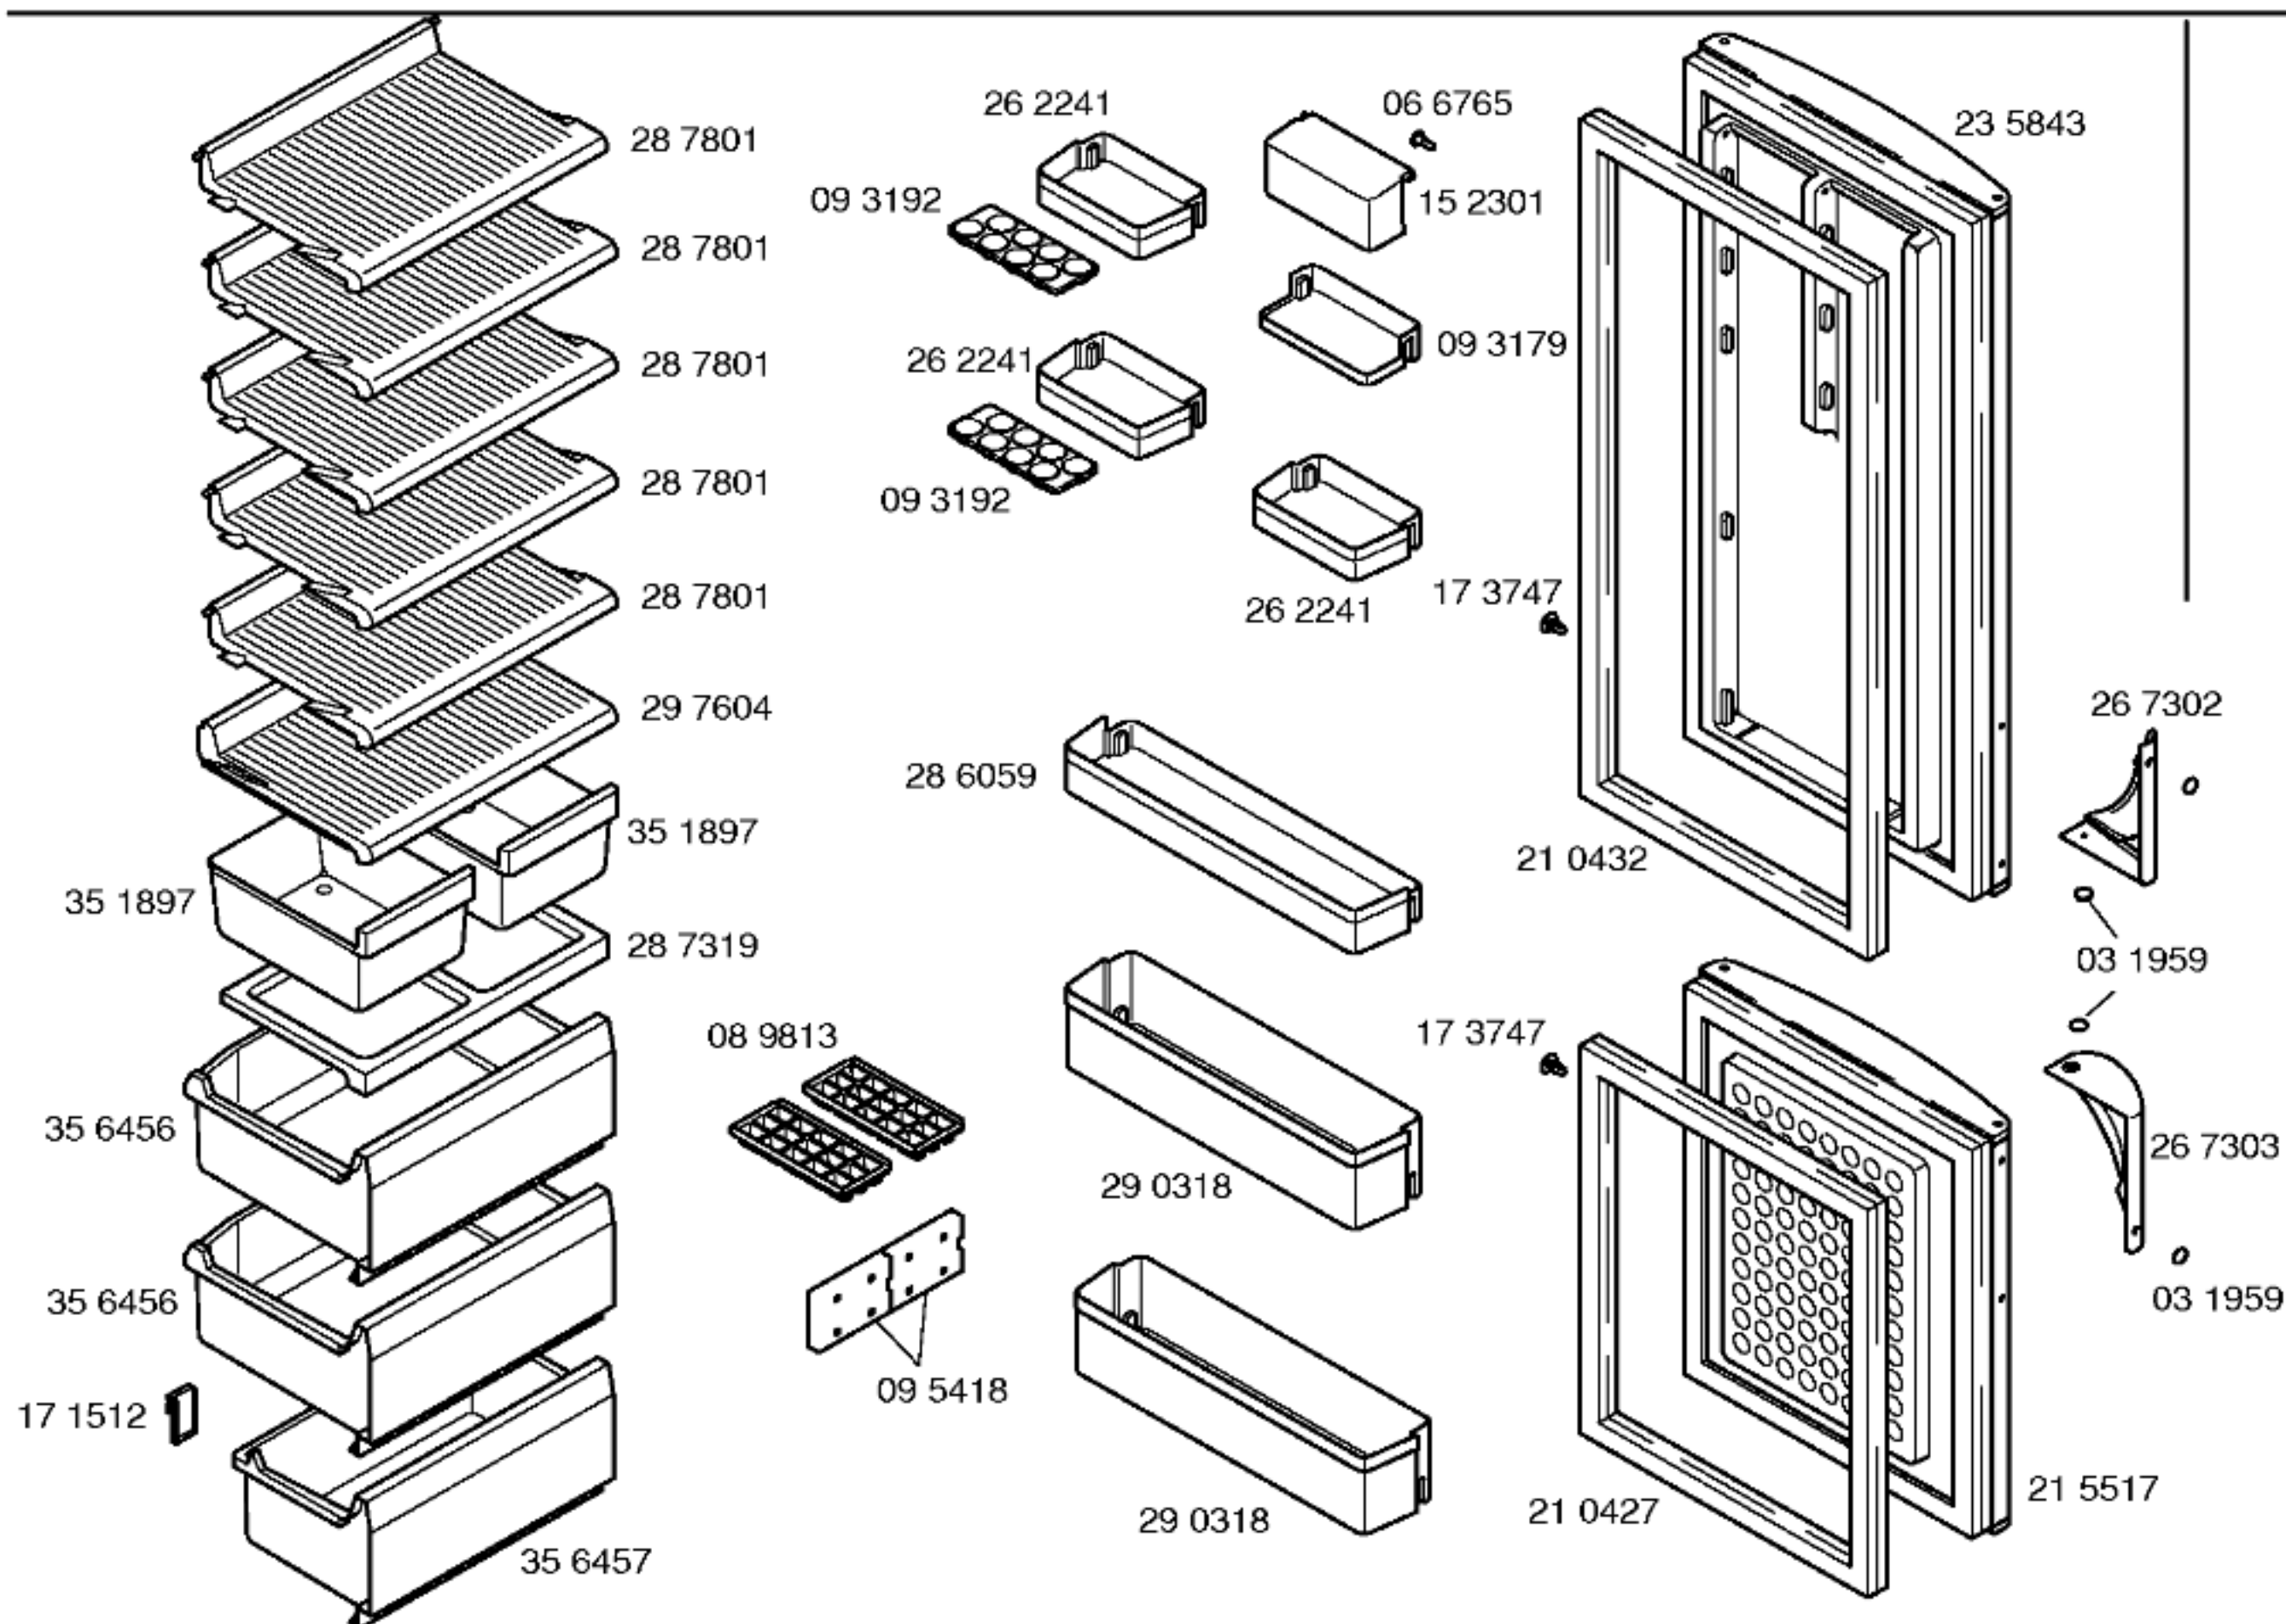

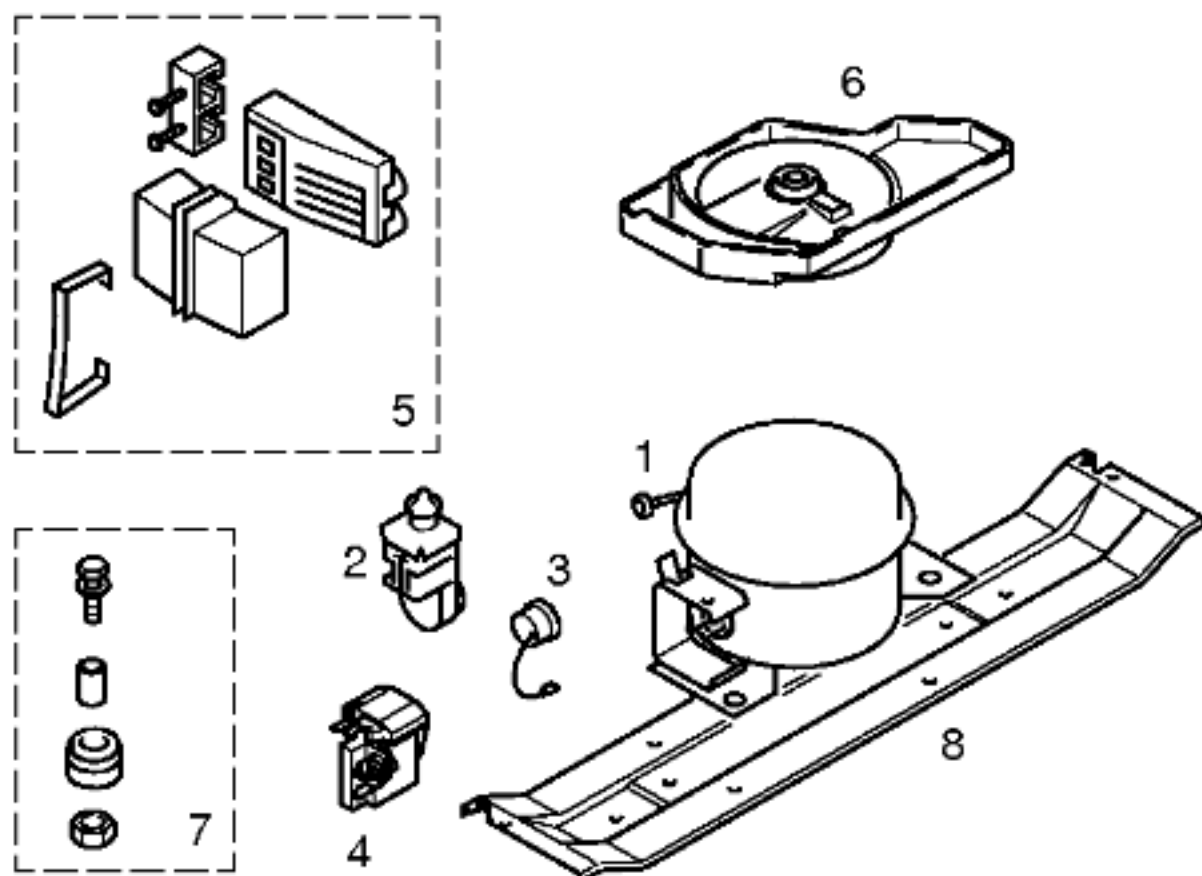

Pos.	V01,V02	V03	****	
	Matsushita	Aspera	Gold Star	
	SD65E80	BPK1072Y	ND69NAEG	
1	14 2003	14 2000	14 2001	
2		15 4315		
3		17 3748		
4	16 5229		17 1011	
5				
6	09 5320	26 4123		
7	05 0166	05 0166	05 0166	
8	28 8253	28 8253	28 8253	
9				
10				
11				
12				
13				

TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS				
	V01,V02	V03	****	
Verdichter/Compressor/Compresseur/Compresor	Matsushita	Aspera	Gold Star	
Typ/Type/Tipo	SD65E80	BPK1072Y	ND69NAEG	
Förderleistung/Delivery/Debit/Aspiración l/h				
Anlaufstrom/Starting current/Cour.démarrage/Int.arranq. A	5,76	0,47		
Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm	22,50	33,10		
Hi/aux.	31,80	38,20		
Temp.Reyler/Thermostat/Termostato	Danfoss		Ranco	
Typ/Type/Tipo	077B6181		K54-L2007	
Reglerstellung/Position/Conexión	MIN. MAX.		MIN. MAX.	
Schaltwerte/Switching values/	..ein/conex.°C	+6°	-14° -22°	
Valeurs de commutation/Desconex.	..aus"/descon.	-11° -28°	-20° -28°	
(..abtaven' od)	..alarm'		-10° -18°	
Füllmenge/Fill. quantily/Charge/Carga R600a	g	*	*	*
Anschlusswert/Comm. load/Puiss. Connect./Potenc. W	77	79	83	
Heizung/Heater/Chaufrage/Resistenc.descong.				
Widerstand/Resistance/Resistencia Ohm				
Leistung/Power/Puissance/Potencia W				
Ventilador/Blower/Ventilateur/Ventilador				
Widerstand/Resistance/Resistencia Ohm				
Magnetventil/Magnetic valve/Electrovanne/Electrovalvula				
Widerstand/Resistance/Resistencia Ohm				
Spannung/Voltage/Tension/Tensión V				
Temp.Reyler/Thermostat/Termostato ambiente para ventilador refrigerador				

* Siehe Typenschild / See identification plate / Voir plaque de caractéristiques / Ver plaqueta de características