


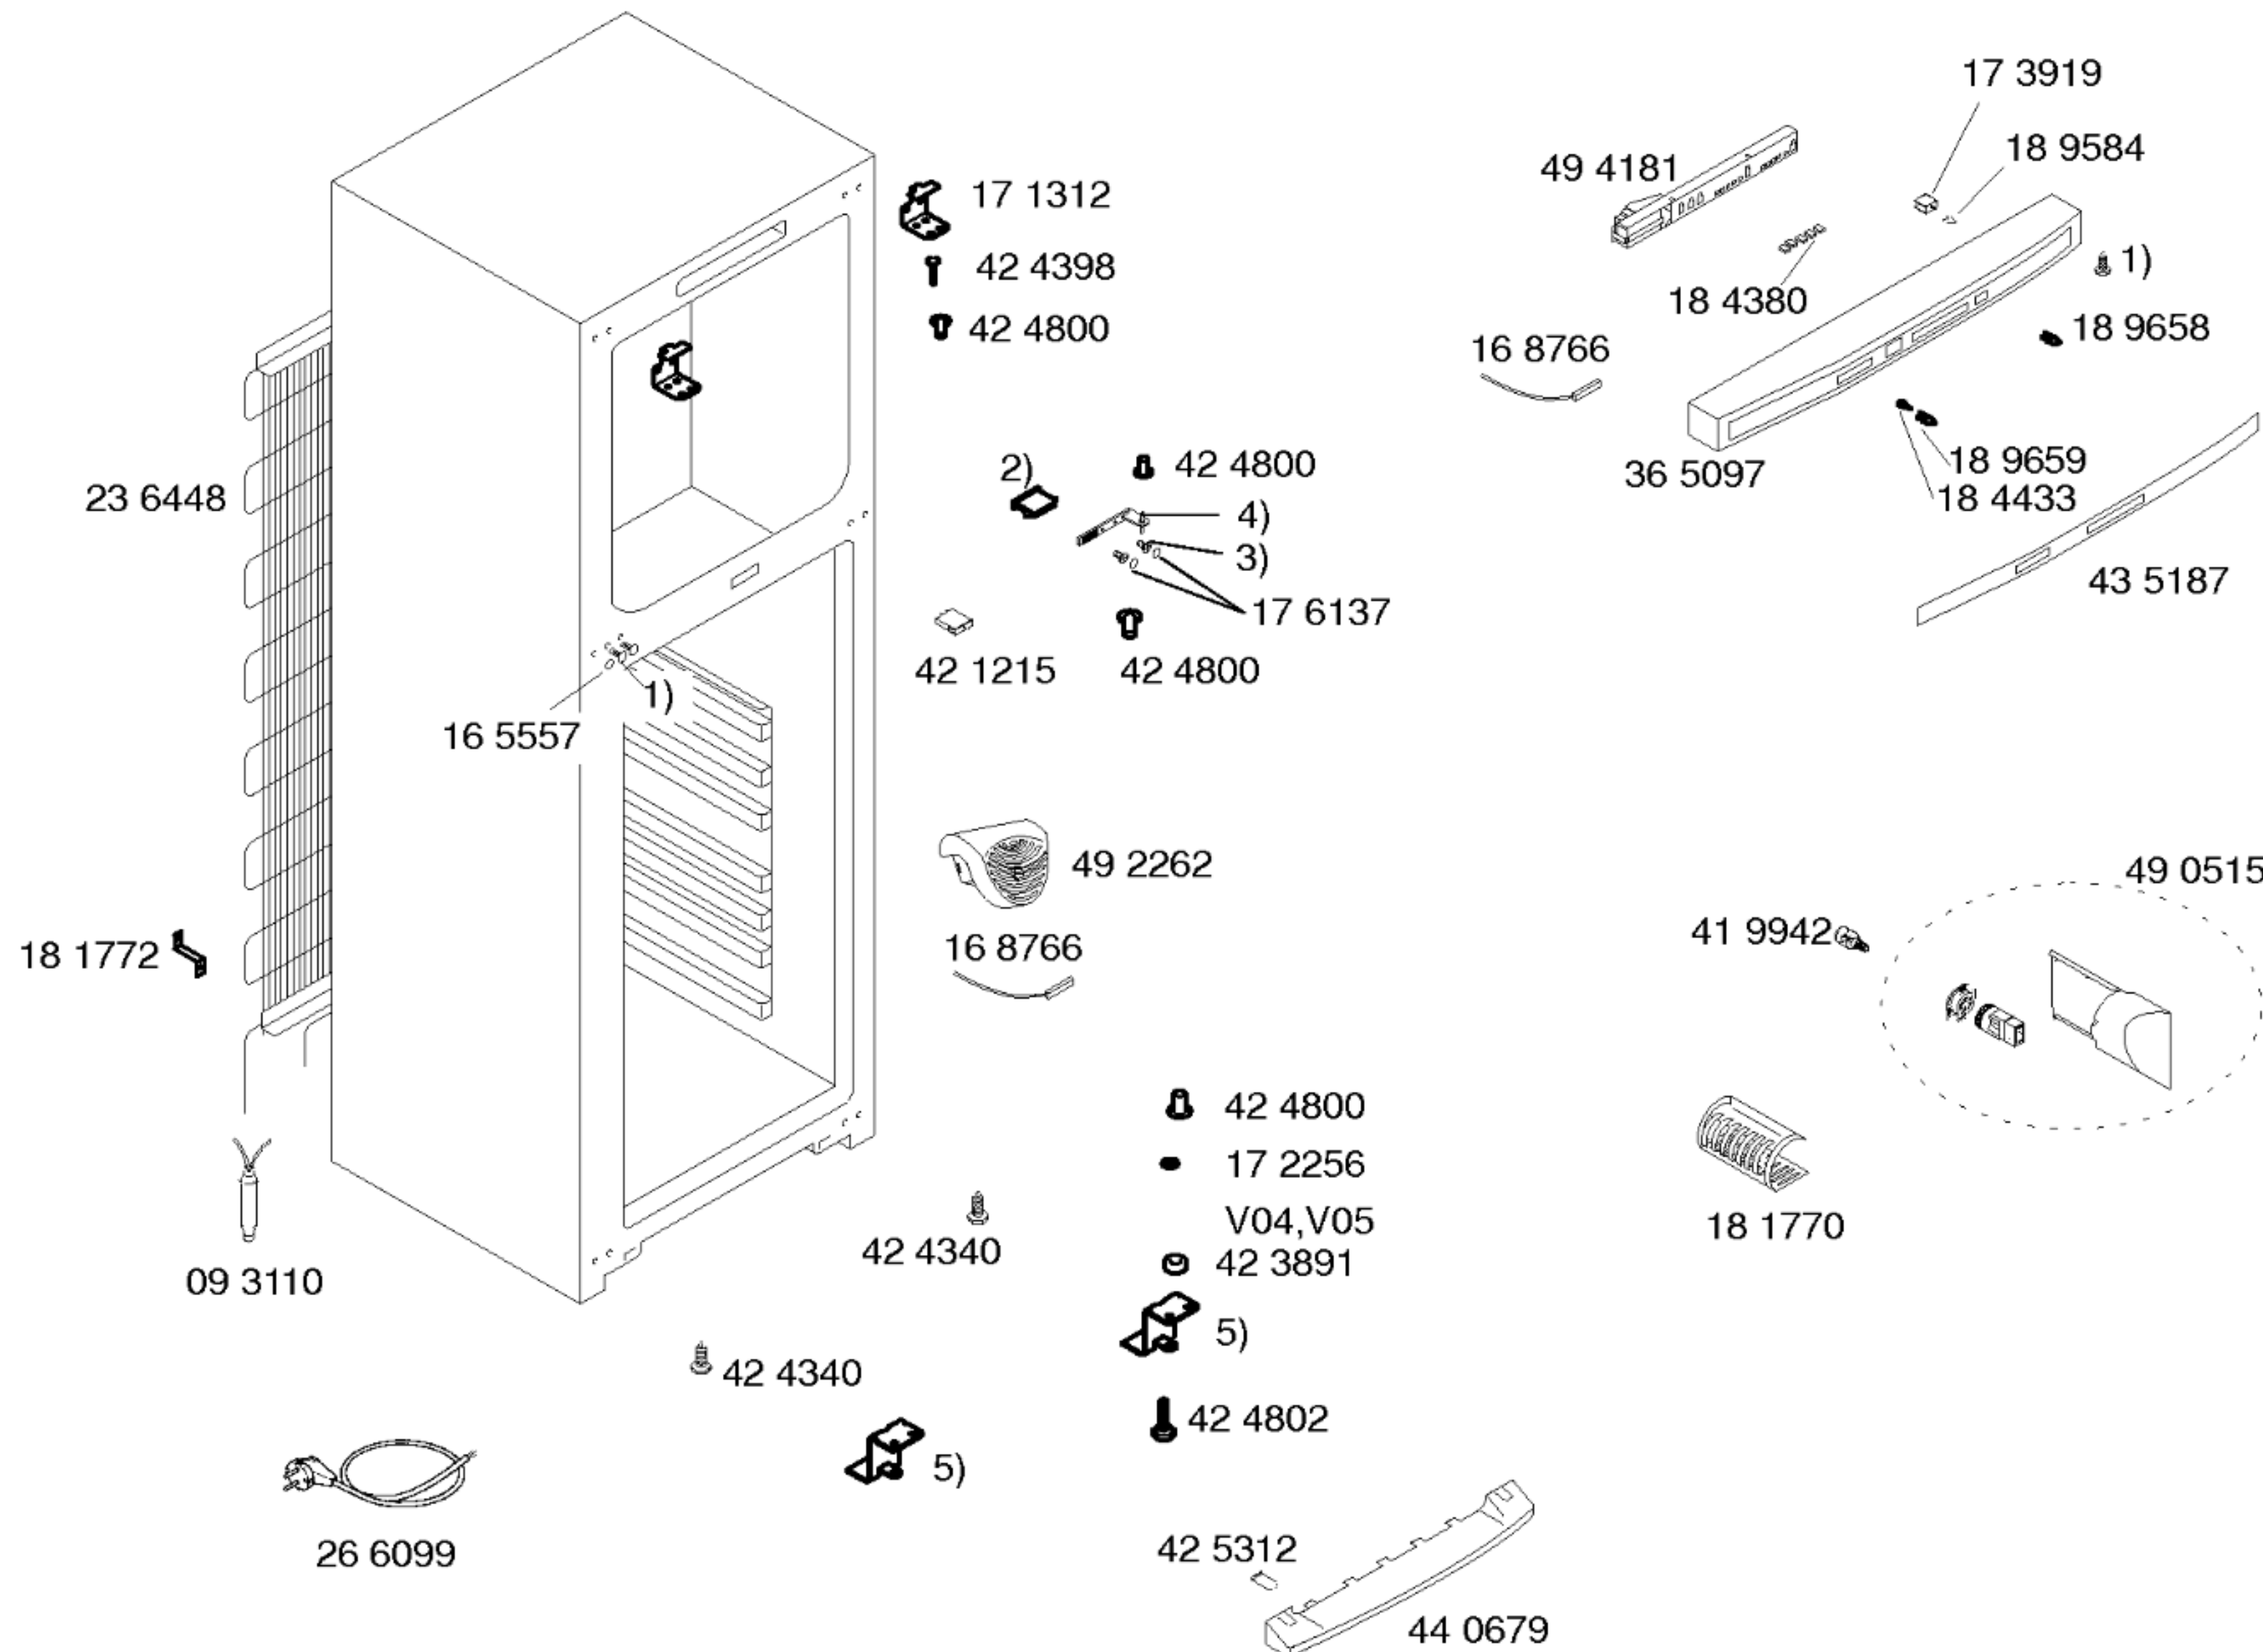

Gebrauchsanweisung
59 1361

V01,V02

69 2514

V03,V04,V05

(FR)

1) 16 5552

2) 41 8128

V01,V02

3) 18 8196

4) 42 4824

V01,V02


42 4825

V03,V04,V05


5) 42 4801

V01,V02,V03

V04

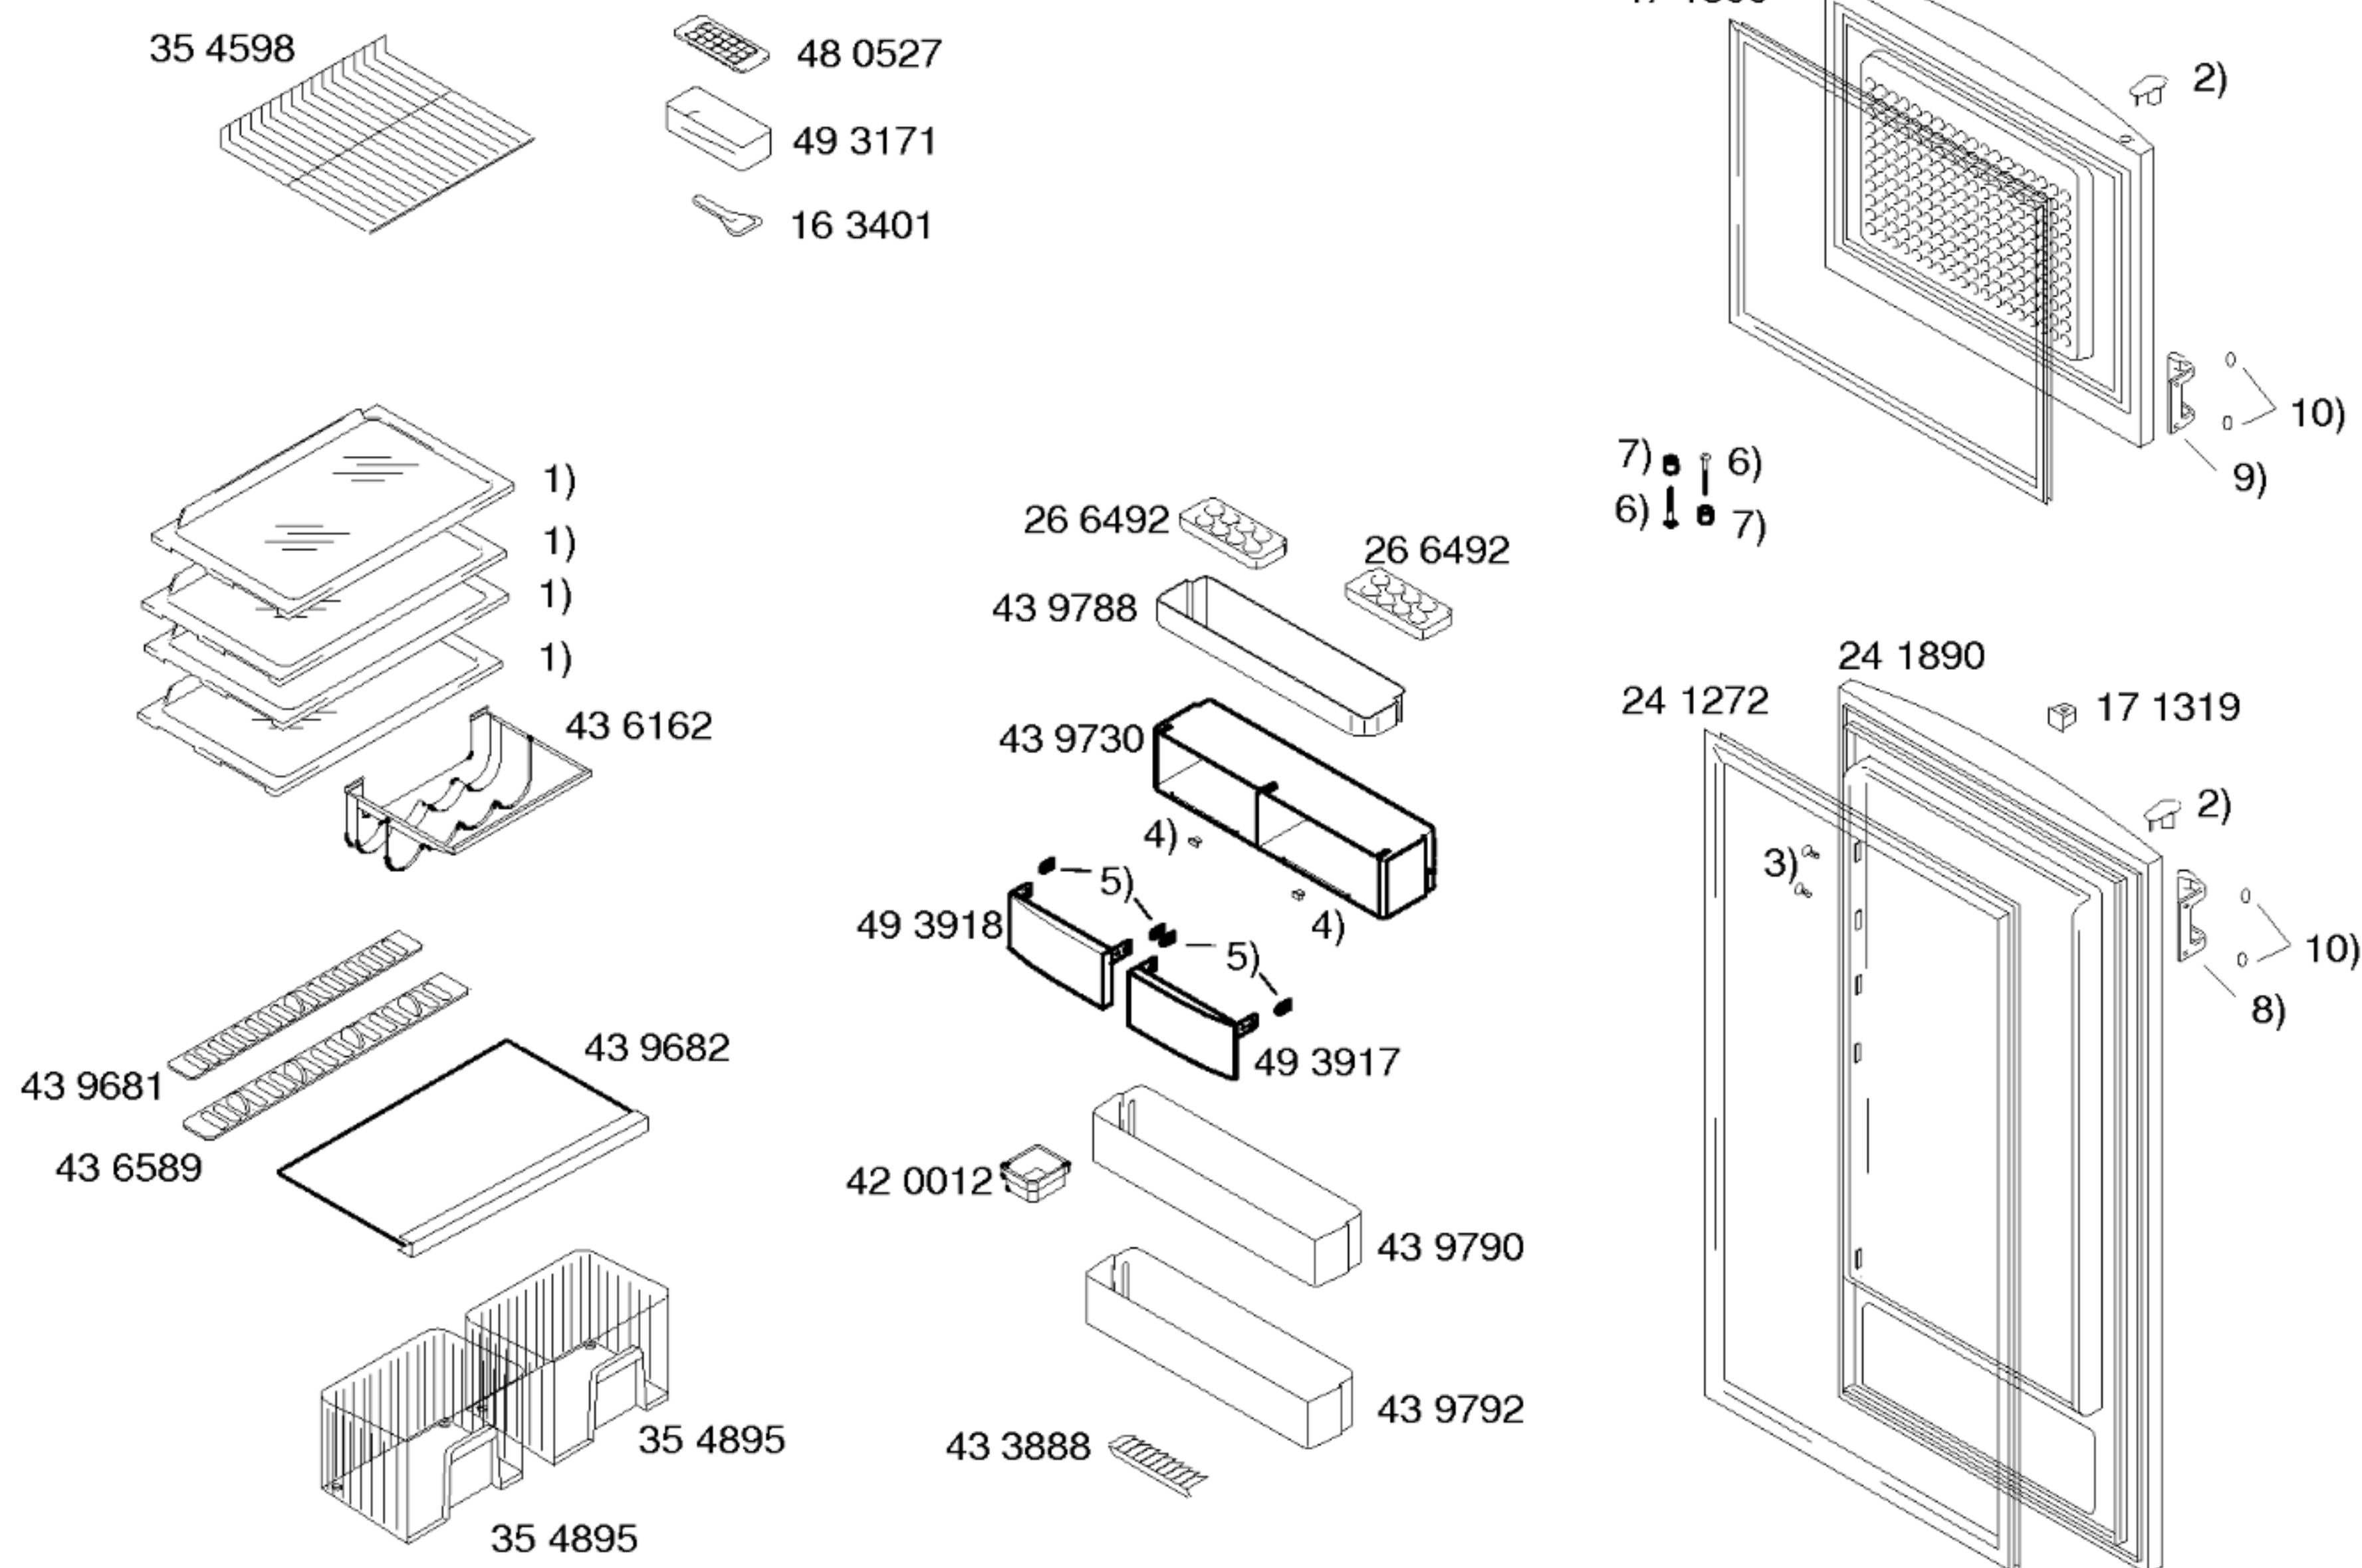

- 1) 43 9140
- 2) 17 1321
- 3) 16 6484
- 4) 42 0752
- 5) 42 4431
- 6) 18 8194
- 7) 18 8188
- V01,V02
- 8) 48 0646
- V01,V02,V03,V04
- 64 0503
- V05
- 9) 48 0648
- V01,V02,V03,V04
- 64 0504
- V05
- 10) 60 4835
- V05

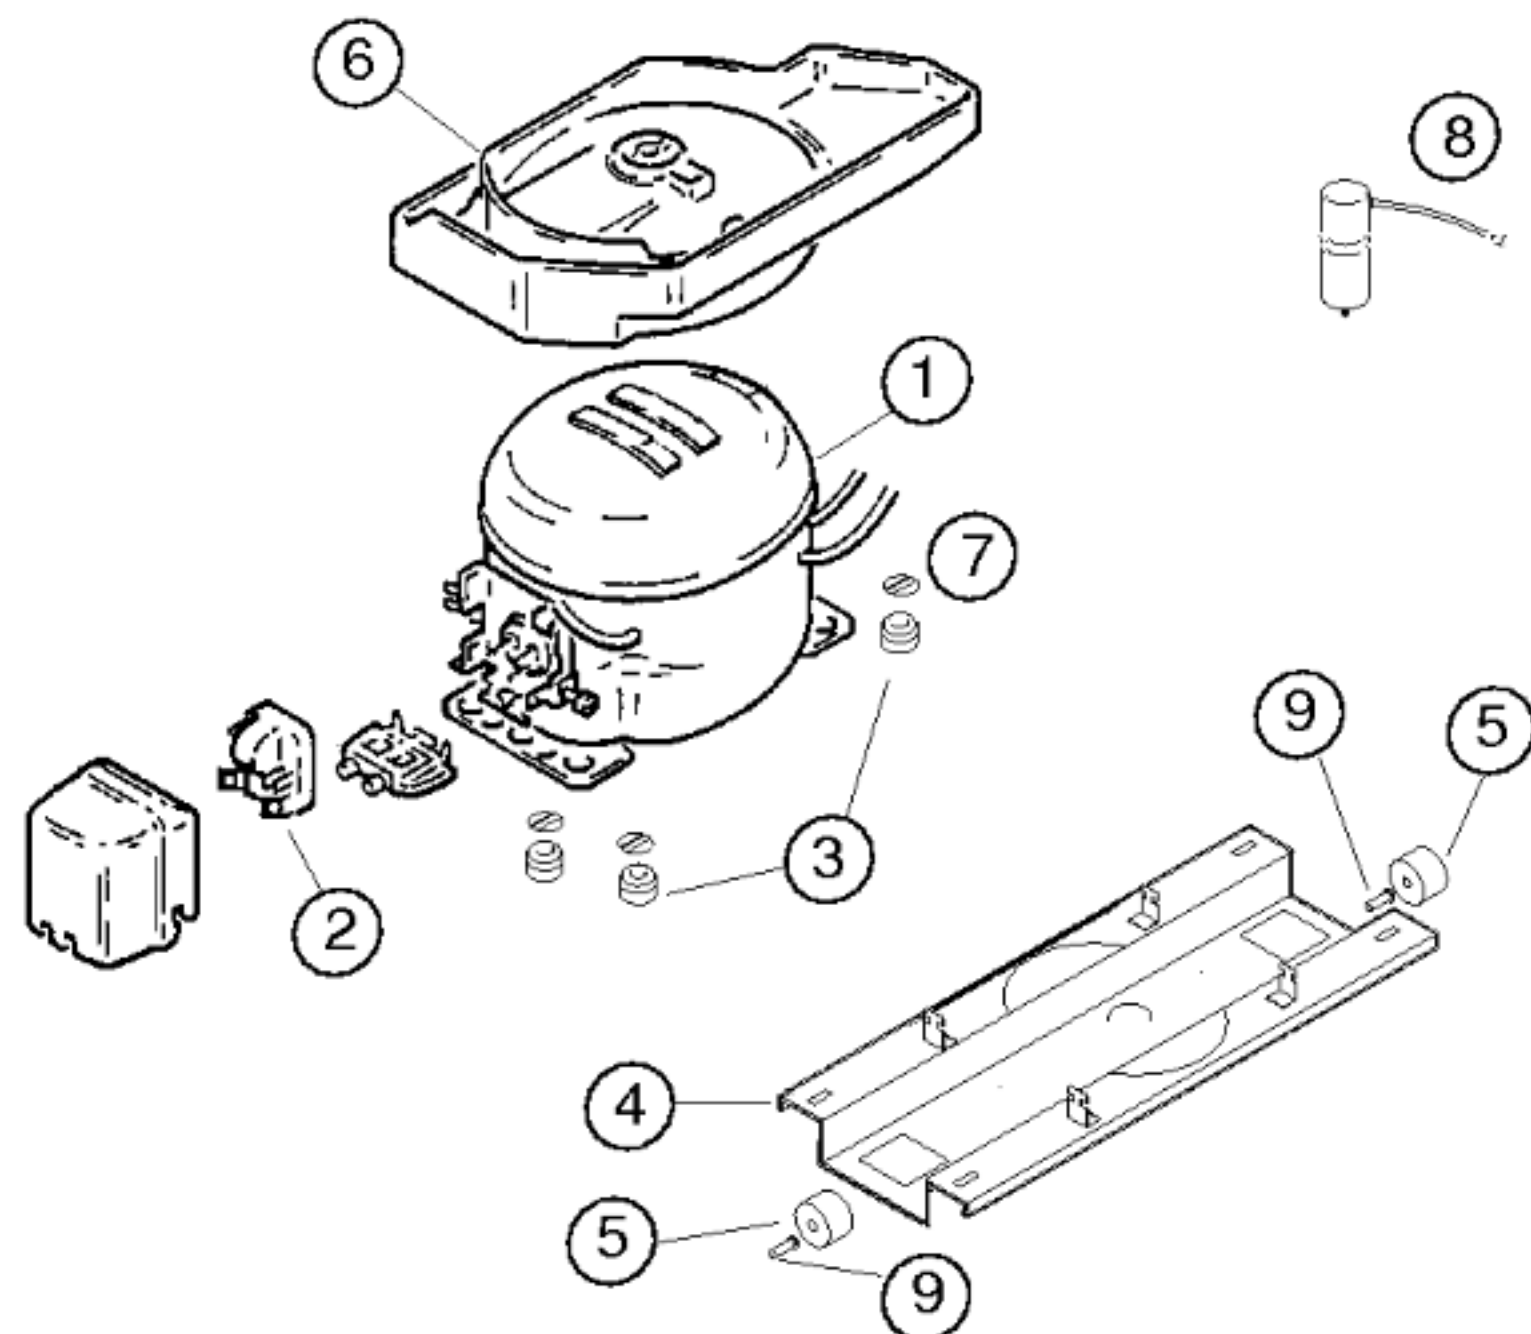

Pos.	Matsushita		
	DC125E12		
1	14 2169		
2	18 3872		
3	16 3427		
4	35 4583		
5	17 1318		
6	49 1245		
7	17 1519		
8	17 4093		
9	18 1014		
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER			
Verdichter/Compressor/Kompresör	Matsushita		
Typ/Type/Tip	DC125E12		
Förderleistung/Delivery/Verim/h	2074		
Anlaufstrom/Starting current/Giris akimi	A		
Widerstand/Resistance/Rezistans Ha/	Ohm		
Hi/aux.	18.0		
Temp.Reyler/Thermostat/Termostat	Electronic		
Typ/Type/Tip			
Reglerstellung/Position/Termostat pozisyonu			
Schaltwerte/Actua kapama degerleri	..ein/acma °C		
Valeurs de commutation/Termostat degeri	..aus"/kapama		
(..abtaven' od)	..alarm'		
Füllmenge/Fill. quantily/ Dolum miktarı	R600	g	*
Anschlusswert/Comm. load/Giris gucu	W	*	
Heizung/Heater/Rezistans			
Widerstand/Resistance/Direnc	Ohm		
Leistung/Power/Guc	W		
Ventilador/Blower/Vantilatör			
Widerstand/Resistance/Rezistans	Ohm		
Magnetventil/Magnetic valve/Manyetik valf			
Widerstand/Resistance/Rezistans	Ohm		
Spannung/Voltage/Gerilim	V		
Temp.Reyler/Thermostat/Termostat			

* Siehe Typenschild/Mamul etiketine bakiniz