



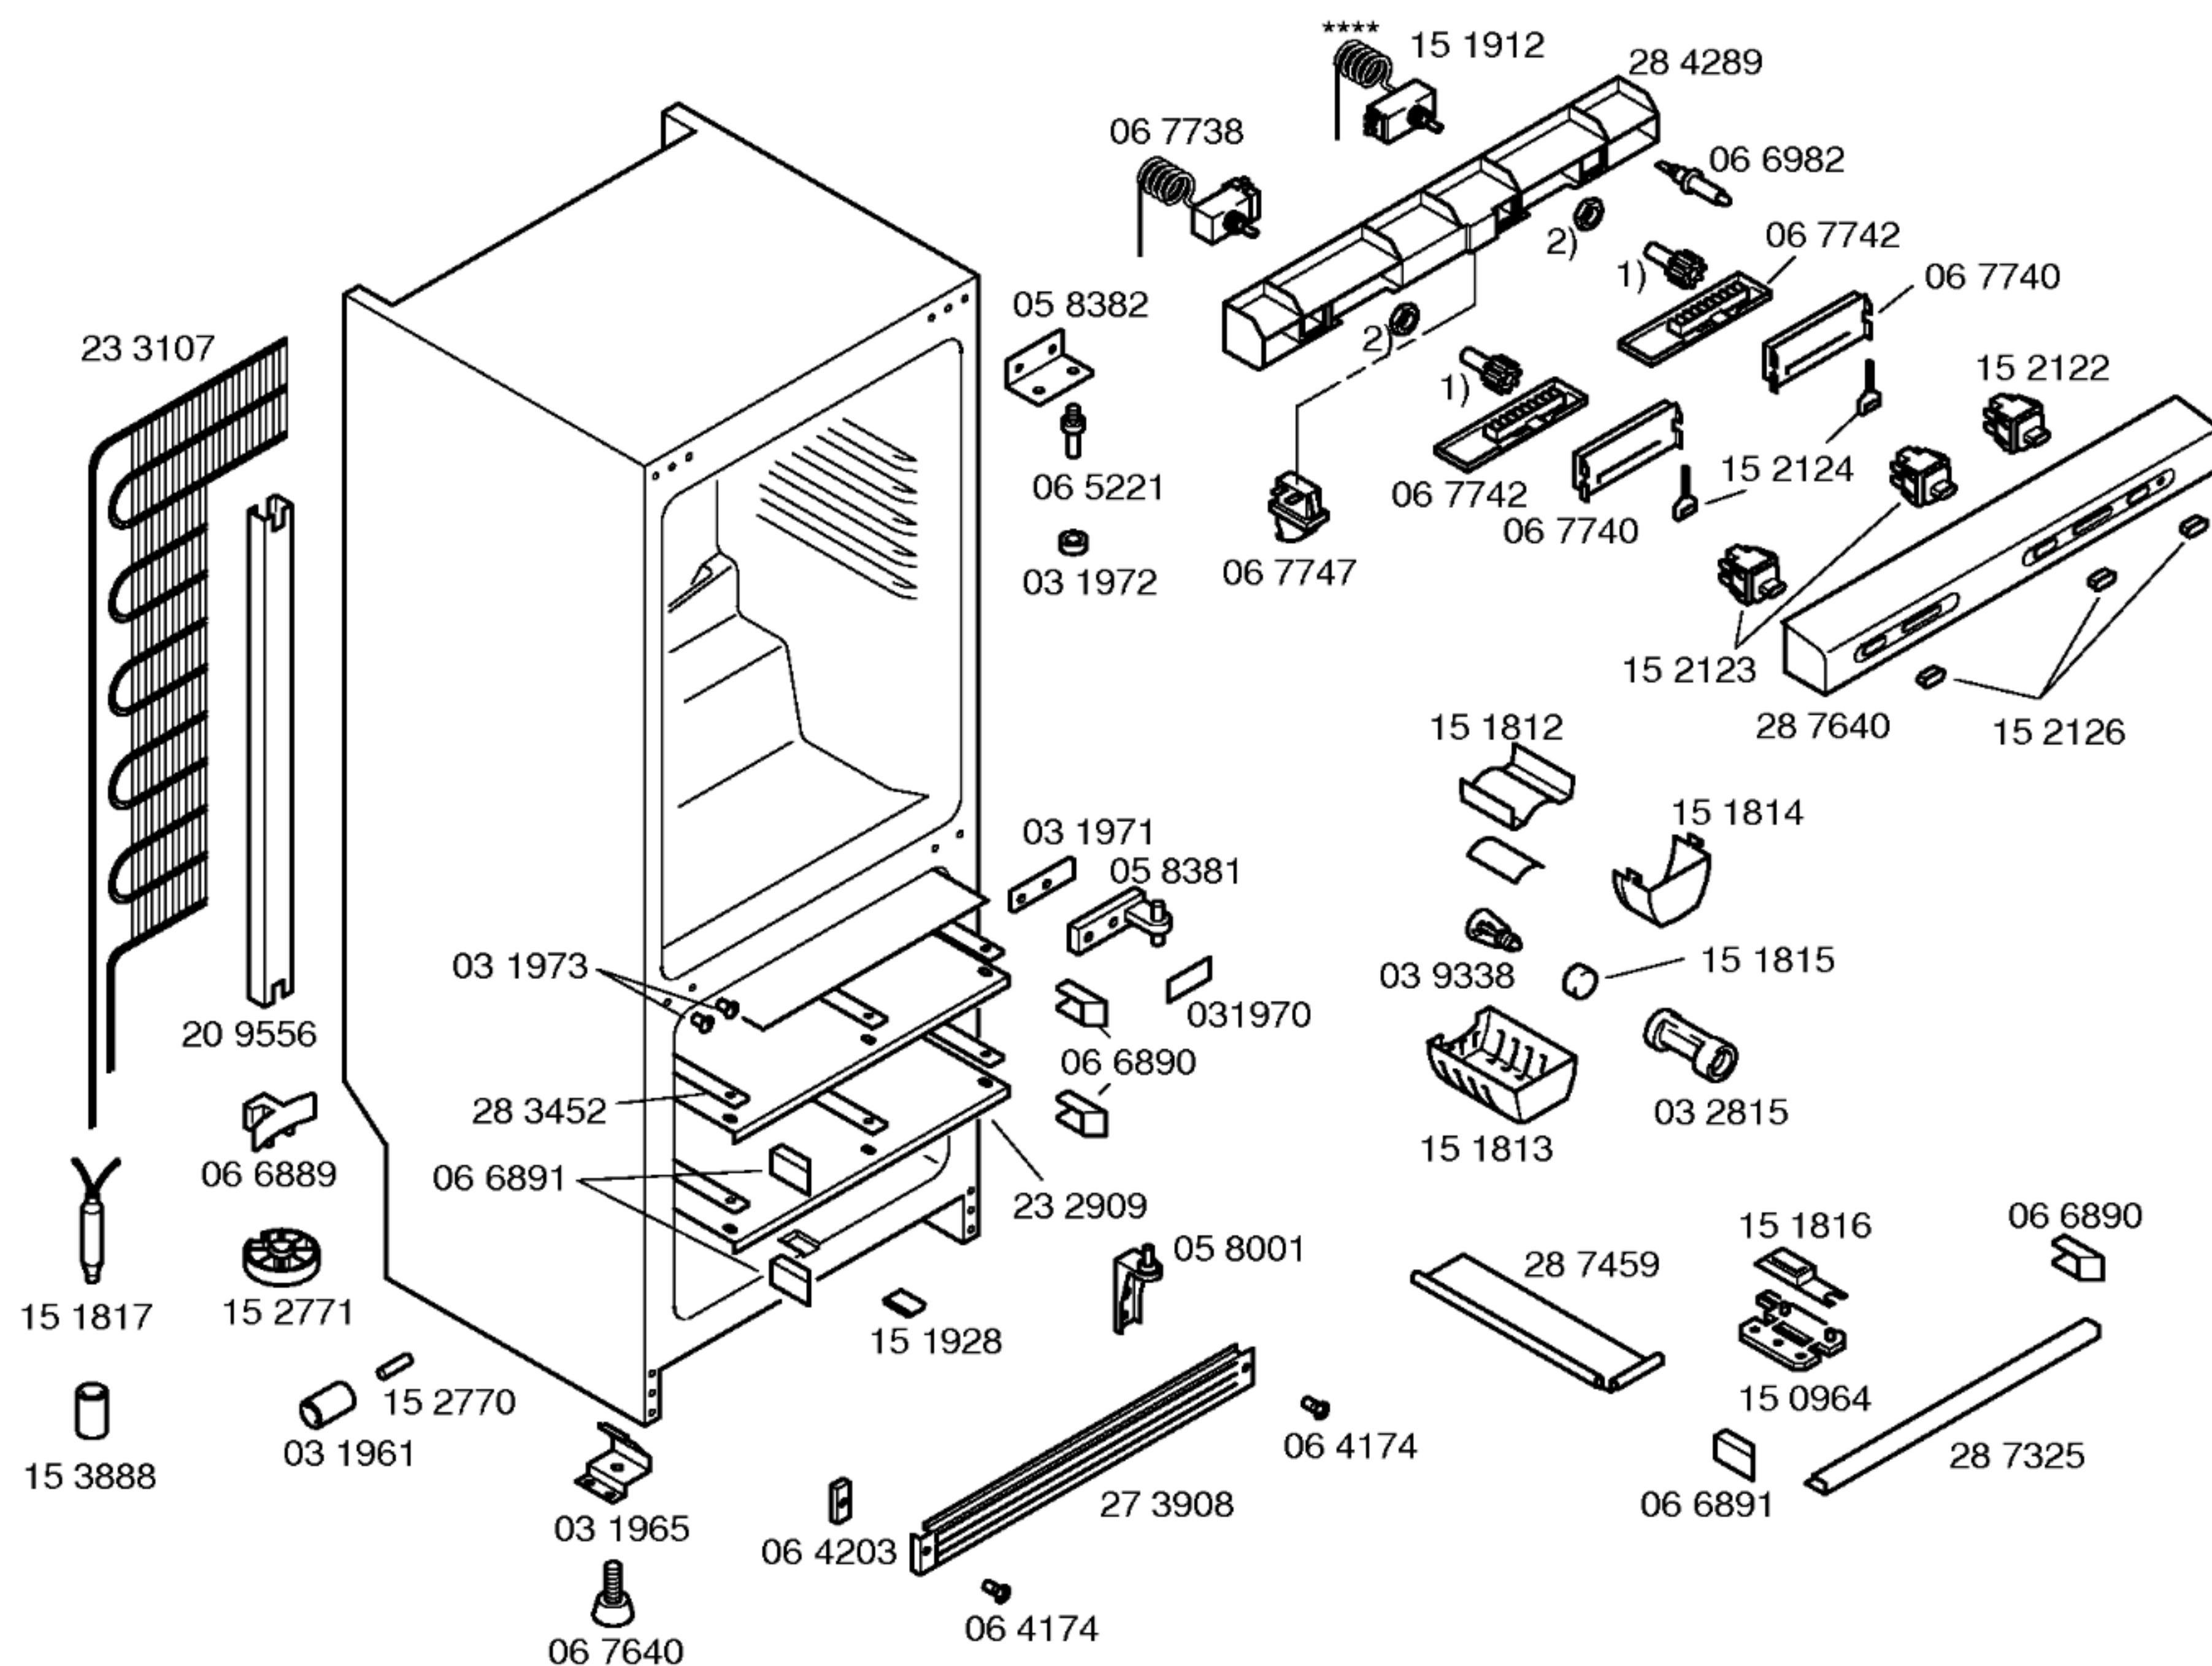


Libro de instrucciones
51 7462
(E, P, GB, F, NL, GR)

1) 06 7746

2) 03 3055

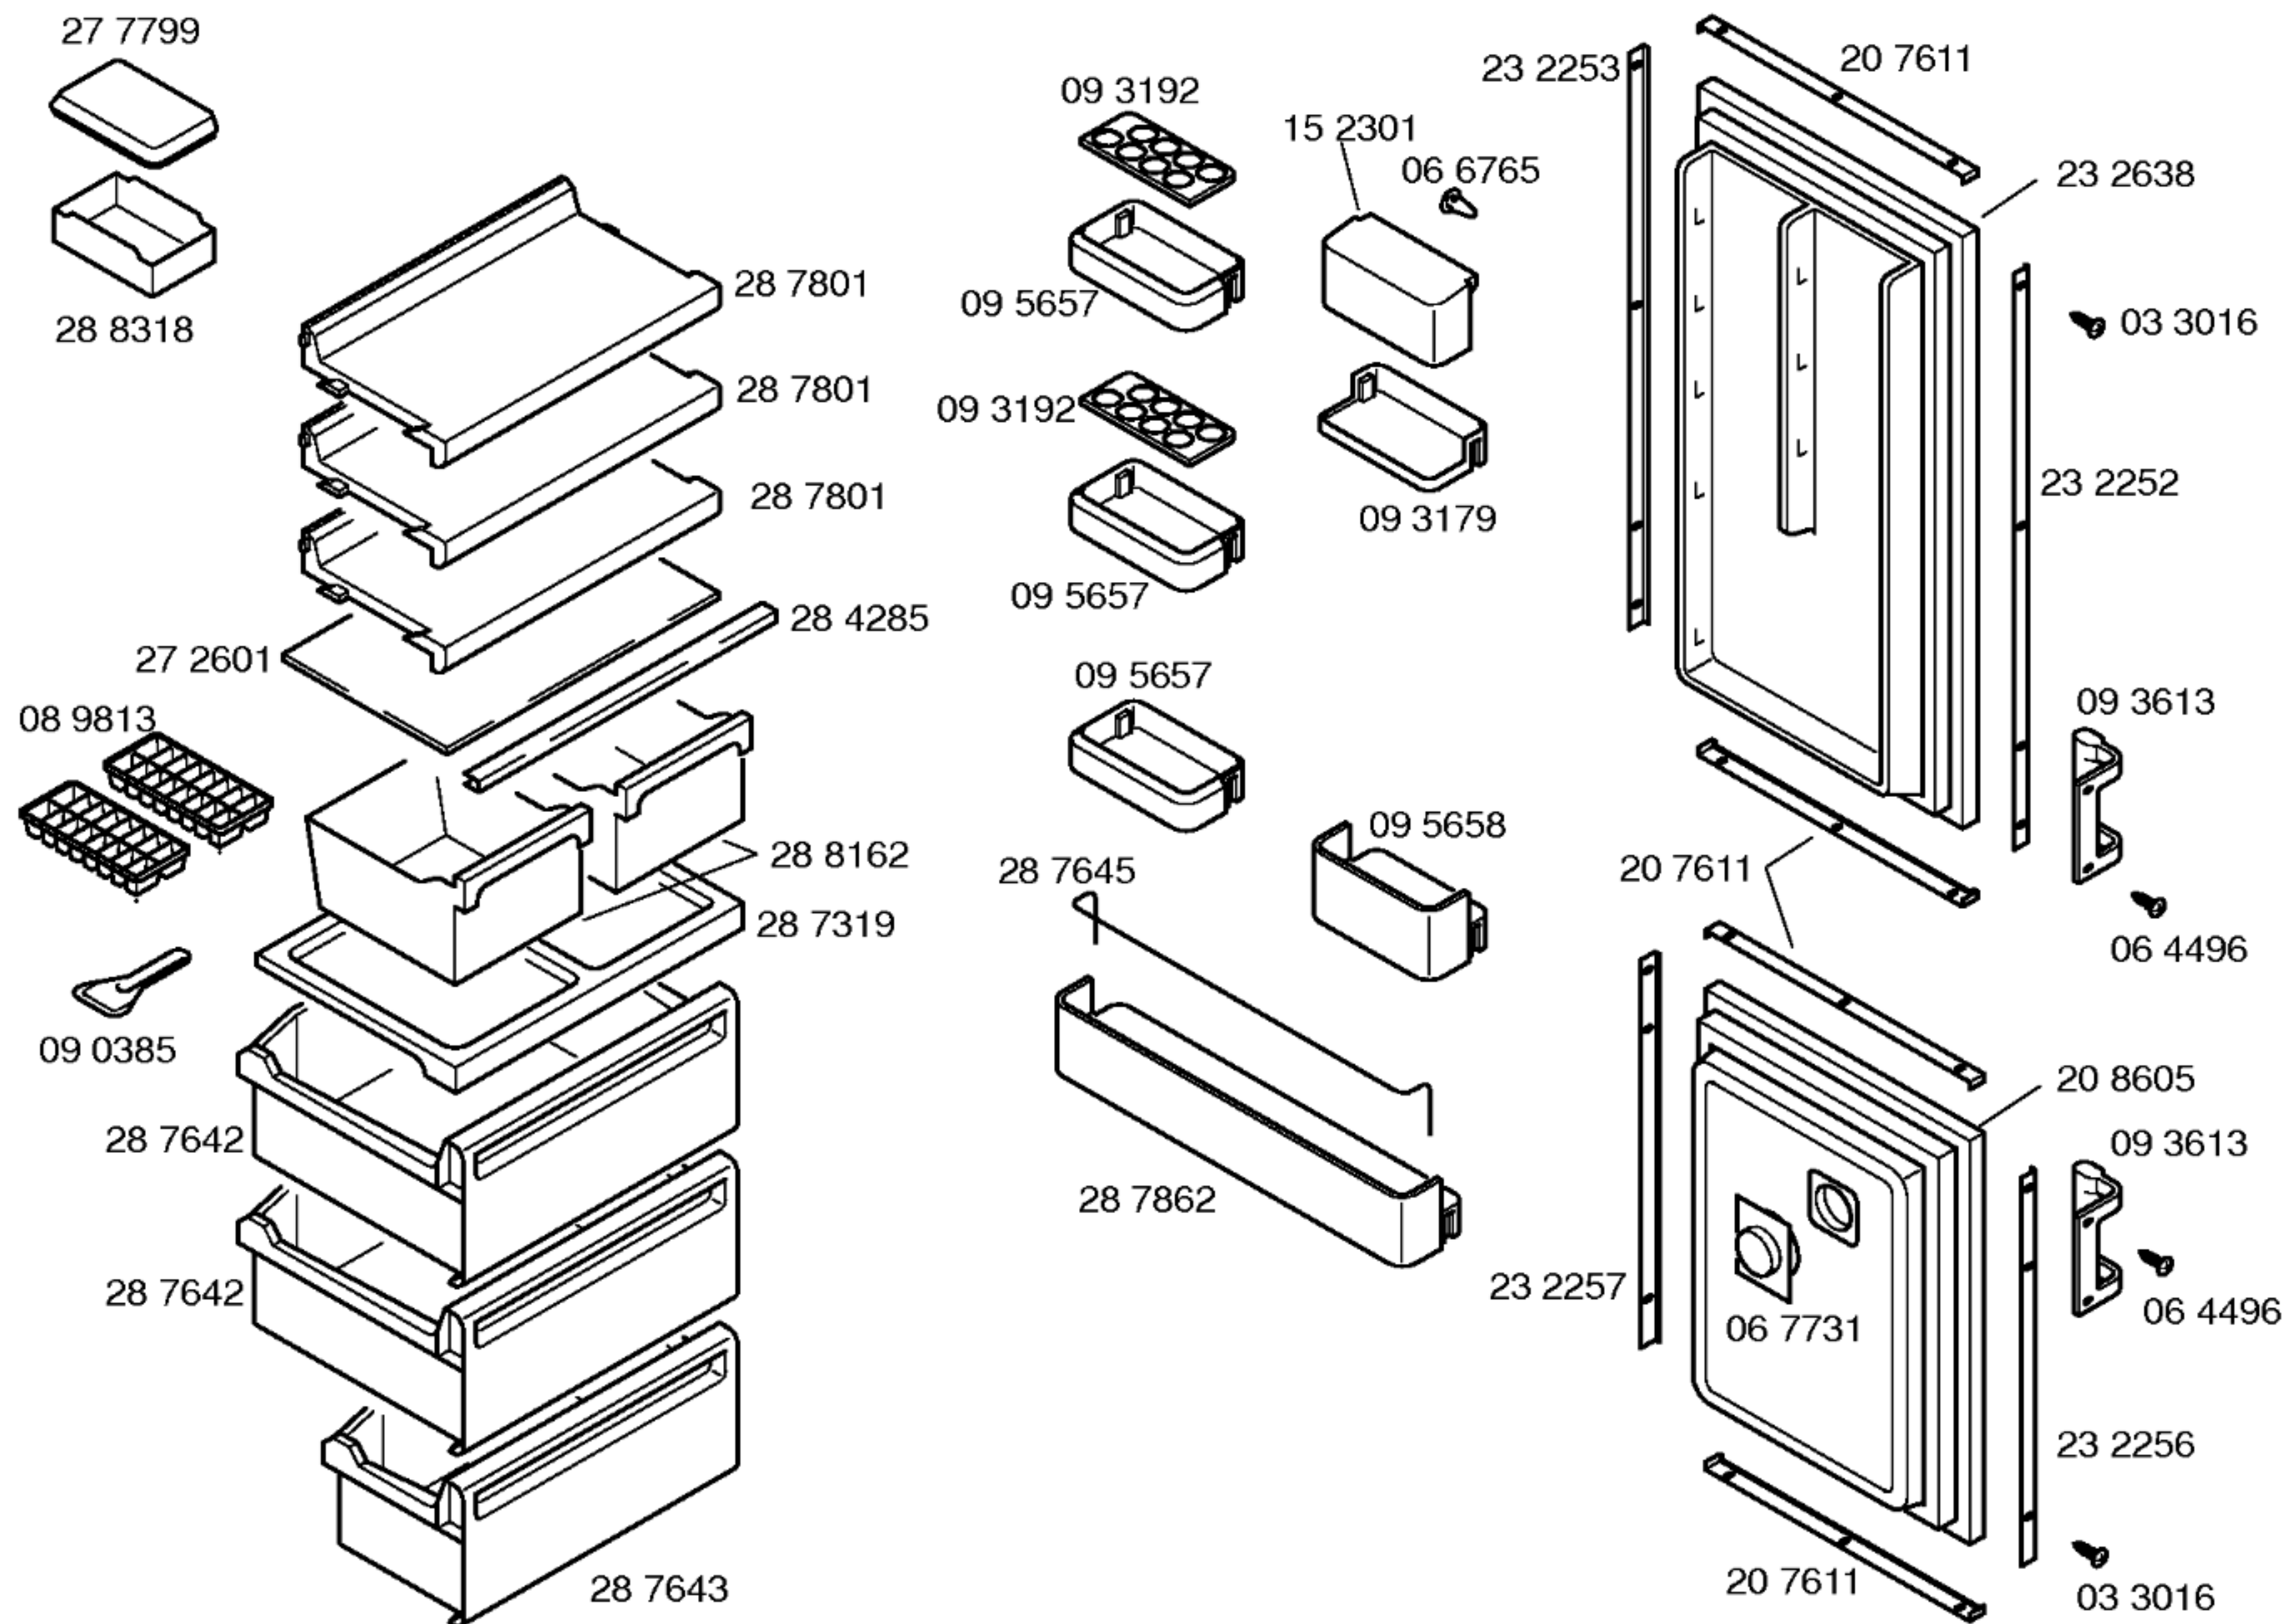

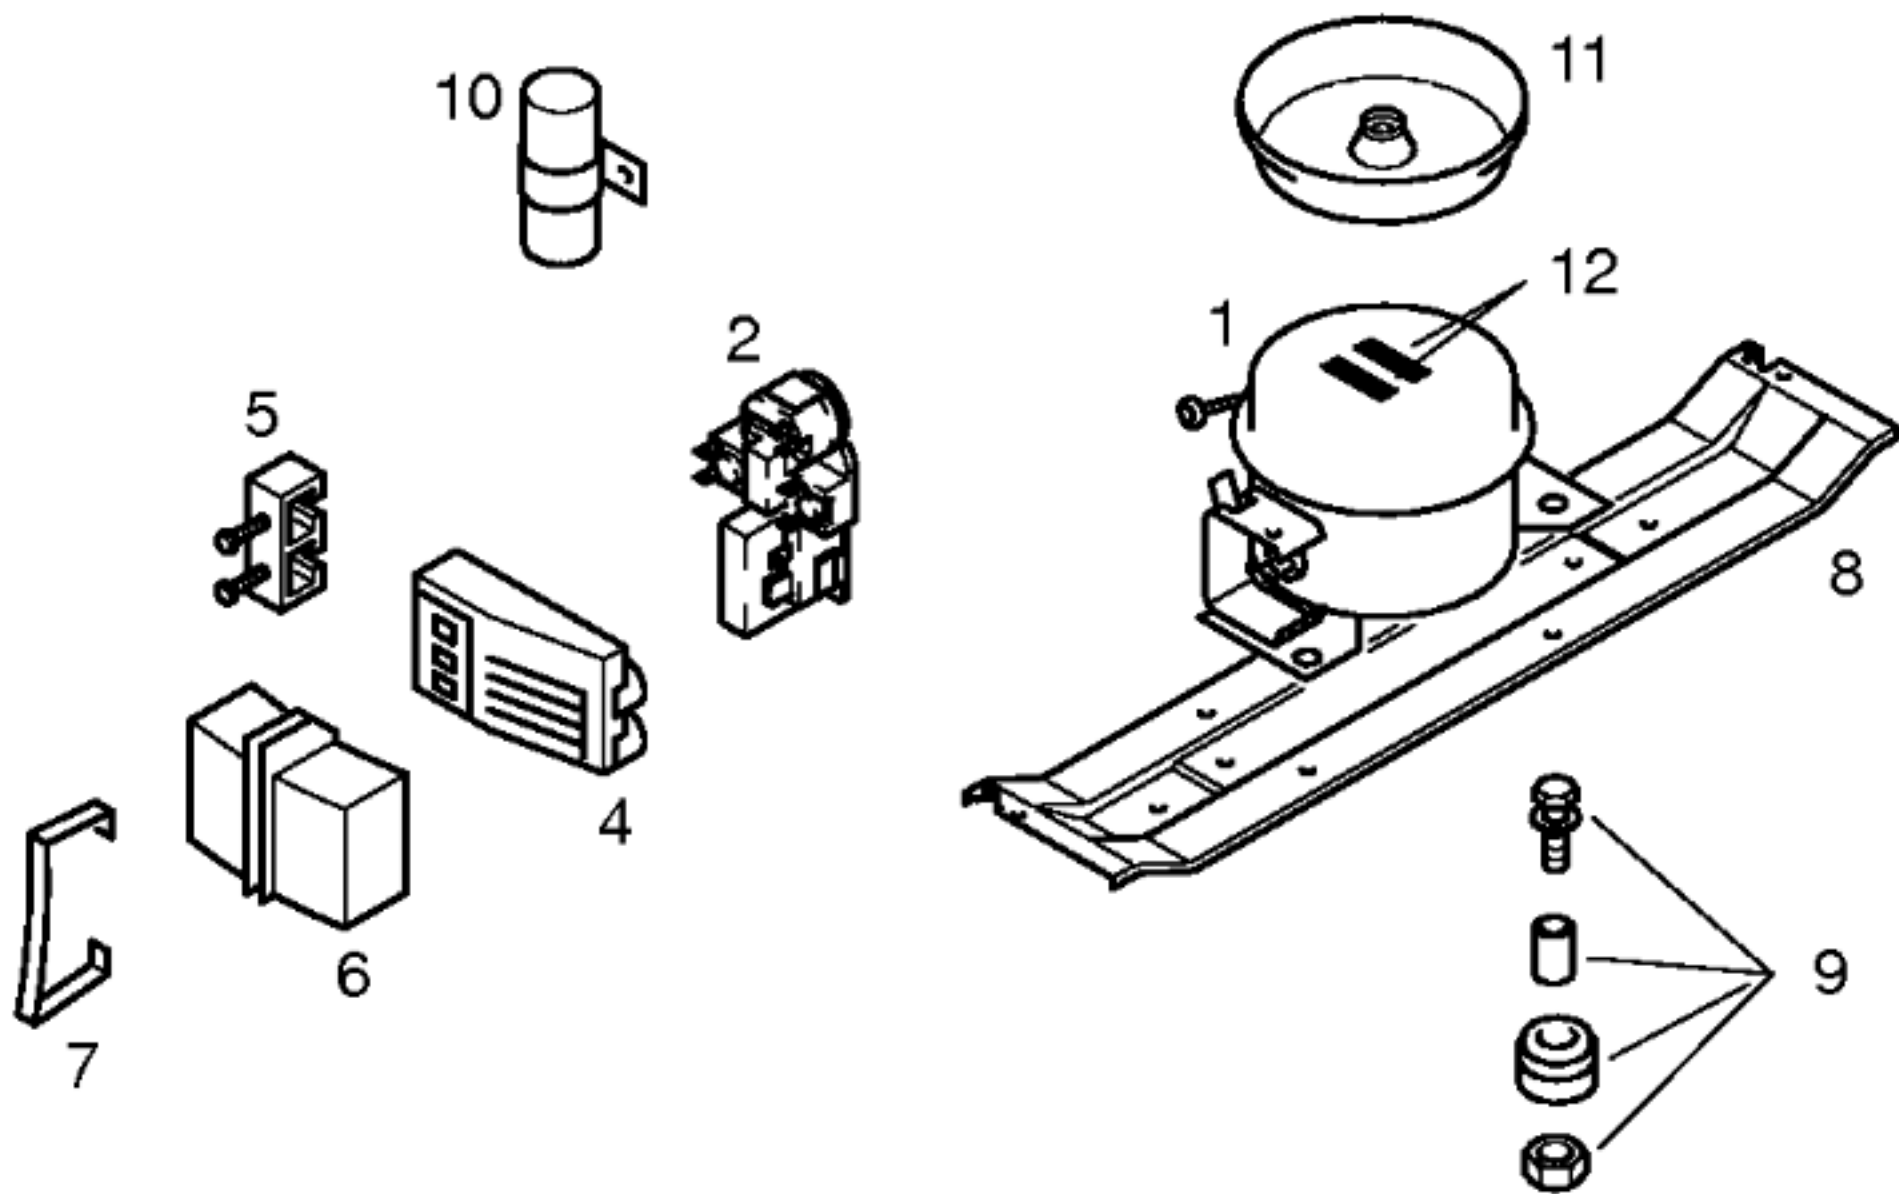

Pos.	MATSUSHITA	ASPERA
	SB43C90WA	BPM1084Z
1	14 1291	14 1343
2	15 1824	15 4315
3		
4		
5		
6		
7		
8	28 8253	
9	05 0166	05 0166
10		
11	09 5320	
12		
13		

TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS			
Verdichter/Compressor/Compresseur/Compresor Typ/Type/Tipo Förderleistung/Delivery/Debit/Aspiración l/h Anlaufstrom/Starting current/Cour.démarrage/Int.arranque A Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm Hi/aux.		Matsushita SB43C90WA 6,45 18,92 31,40	Aspera BPM1084Z 27,8 38,5
Temp.Reyler/Thermostat/Termostato Typ/Type/Tipo Reglerstellung/Position/Conexión Schaltwerte/Switching values/ ..ein/conex.°C Valeurs de commutation/Desconex. ..aus"/descon. (..abtaven' od) ..alarm'		DANFOSS 077B62 MIN.-MAX +6° -13° -28°	RANCO K54 L1924 MIN.-MAX -14° -24° -21° -31° -15°
Füllmenge/Fill. quantily/Charge/Carga 134a		g	60 140
Anschlußwert/Comm. load/puiss. Connect./Potenc.		W	94 84
Heizung/Heater/Chaufage/Resistenc.descong. Widerstand/Resistance/Resistencia Leistung/Power/Puissance/Potencia		Ohm W	
Ventilador/Blower/Ventilateur/Ventilador Widerstand/Resistance/Resistencia		Ohm	
Magnetventil/Magnetic valve/Electrovanne/Electrovalvula Widerstand/Resistance/Resistencia Spannung/Volare/Tension/Tensión		Ohm V	
Temp.Reyler/Thermostat/Termostato ambiente para ventilador refrigerador			