





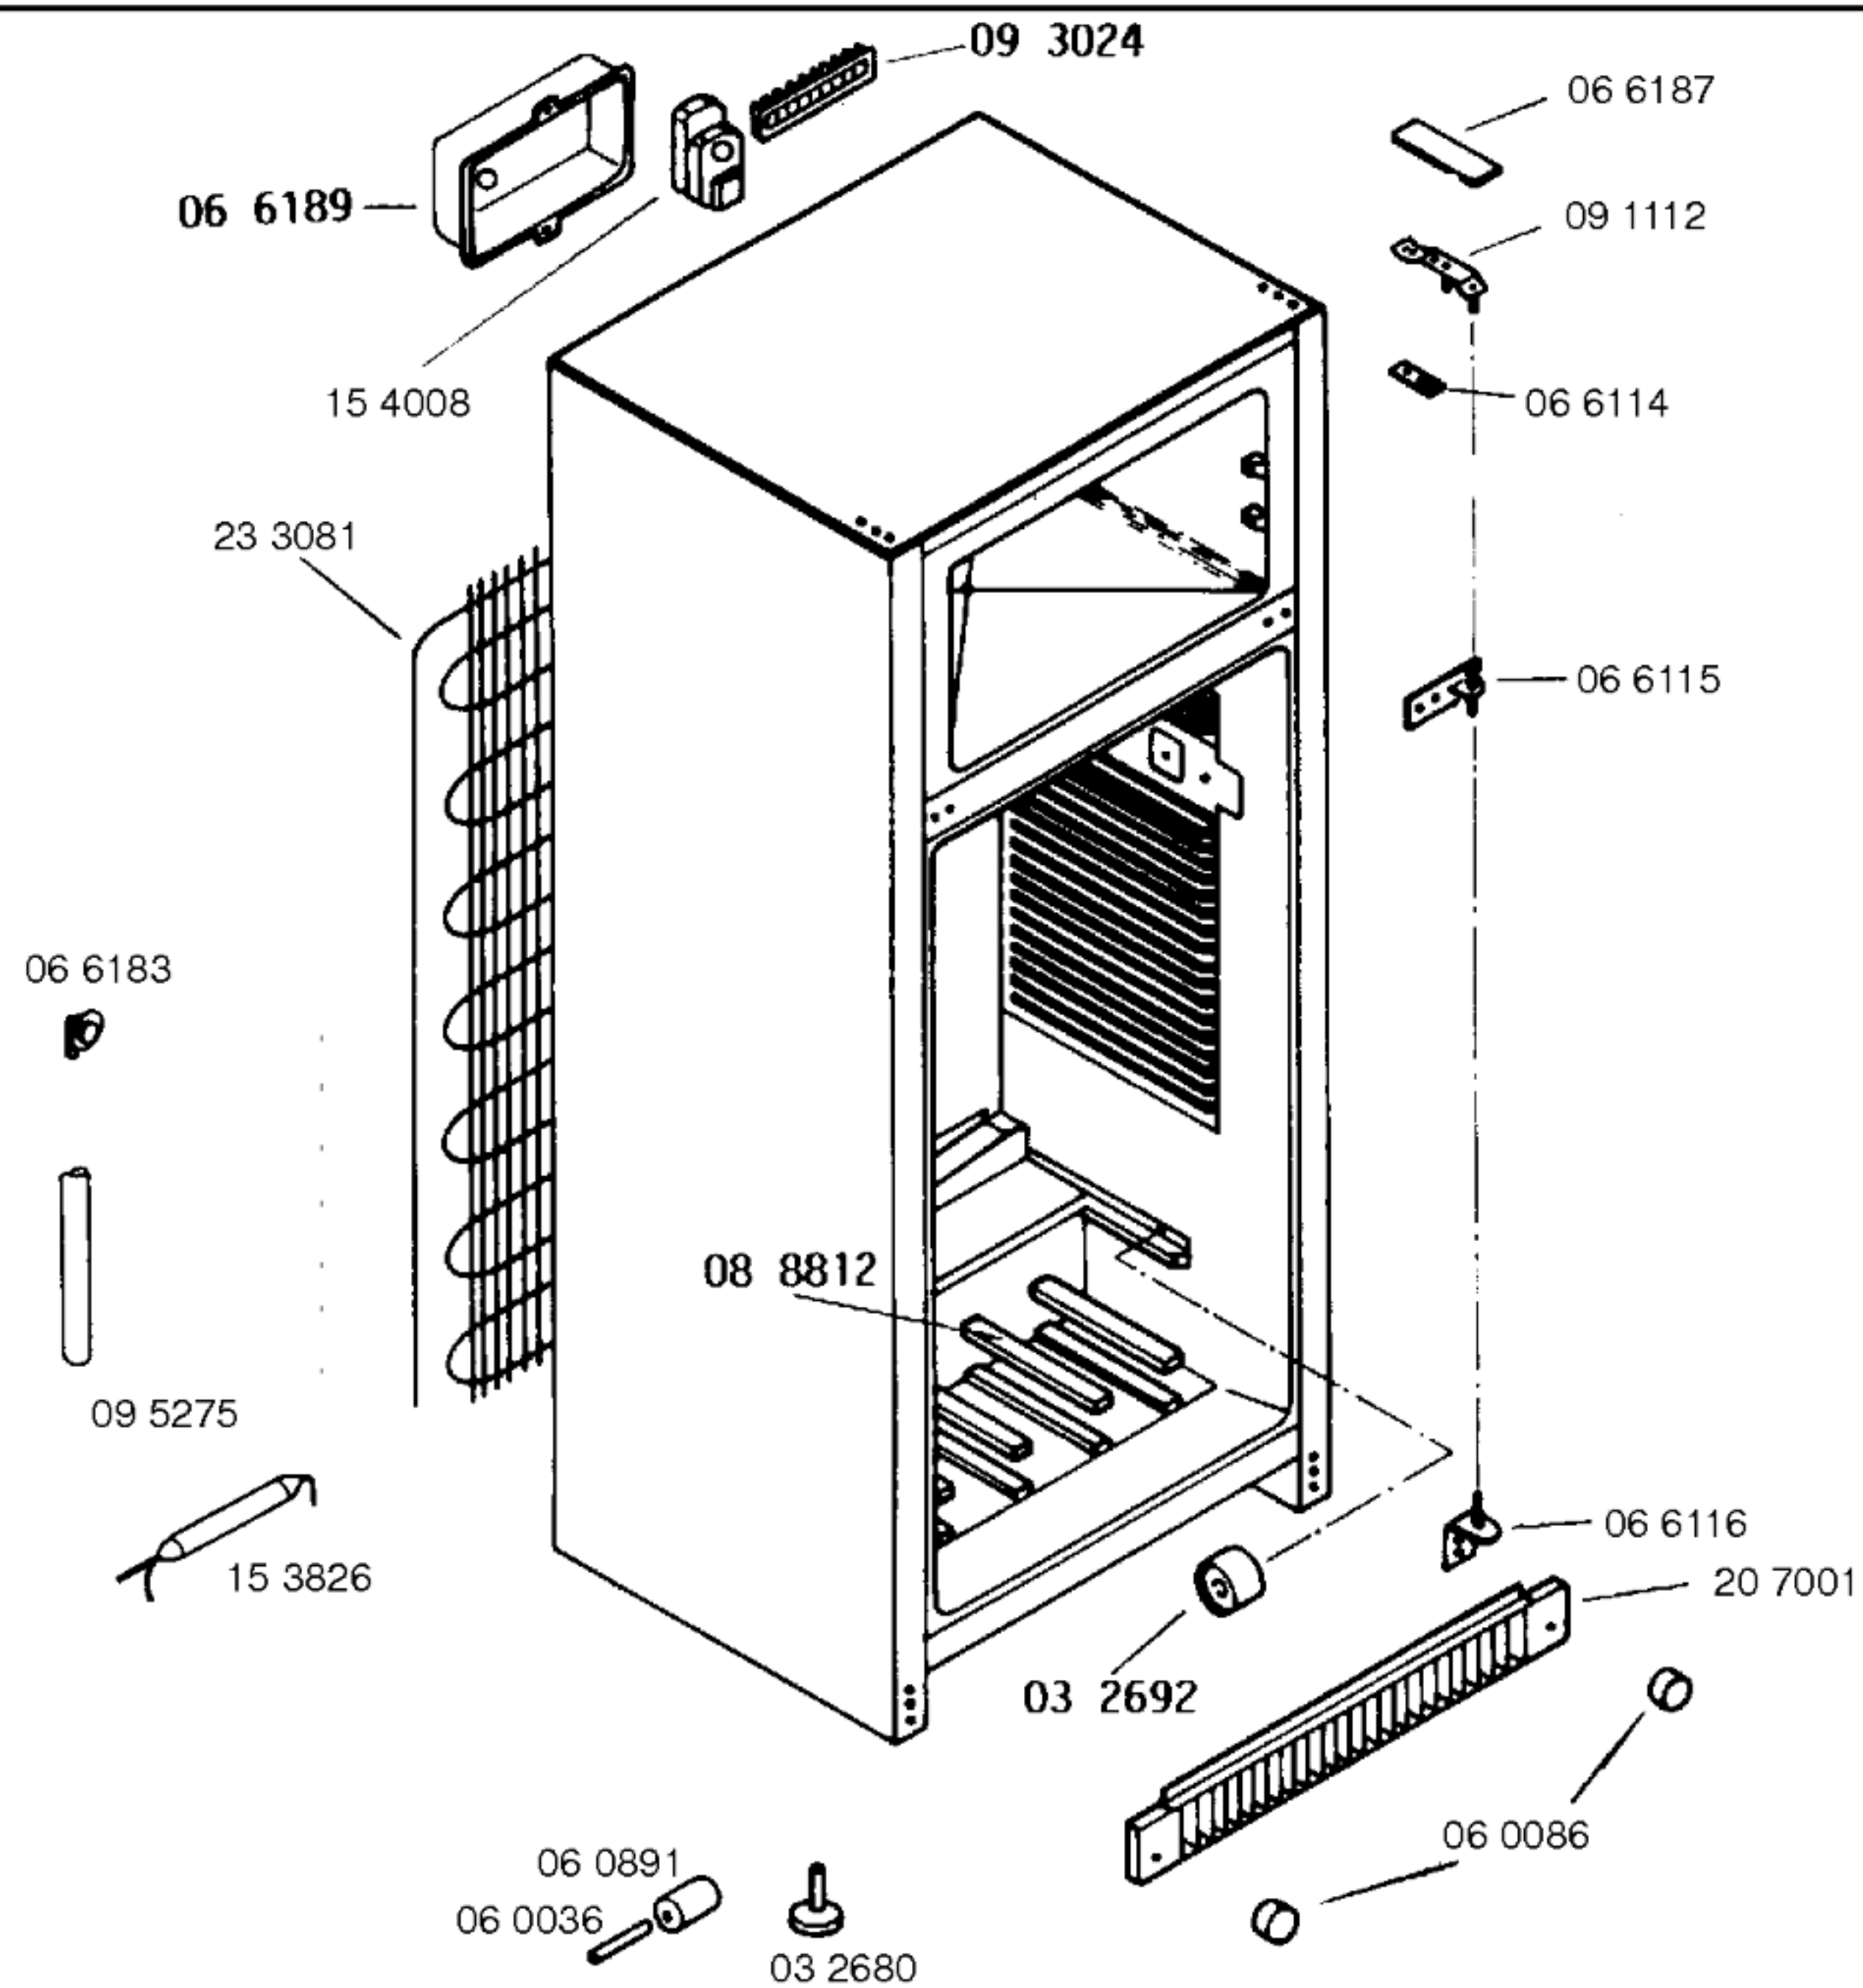


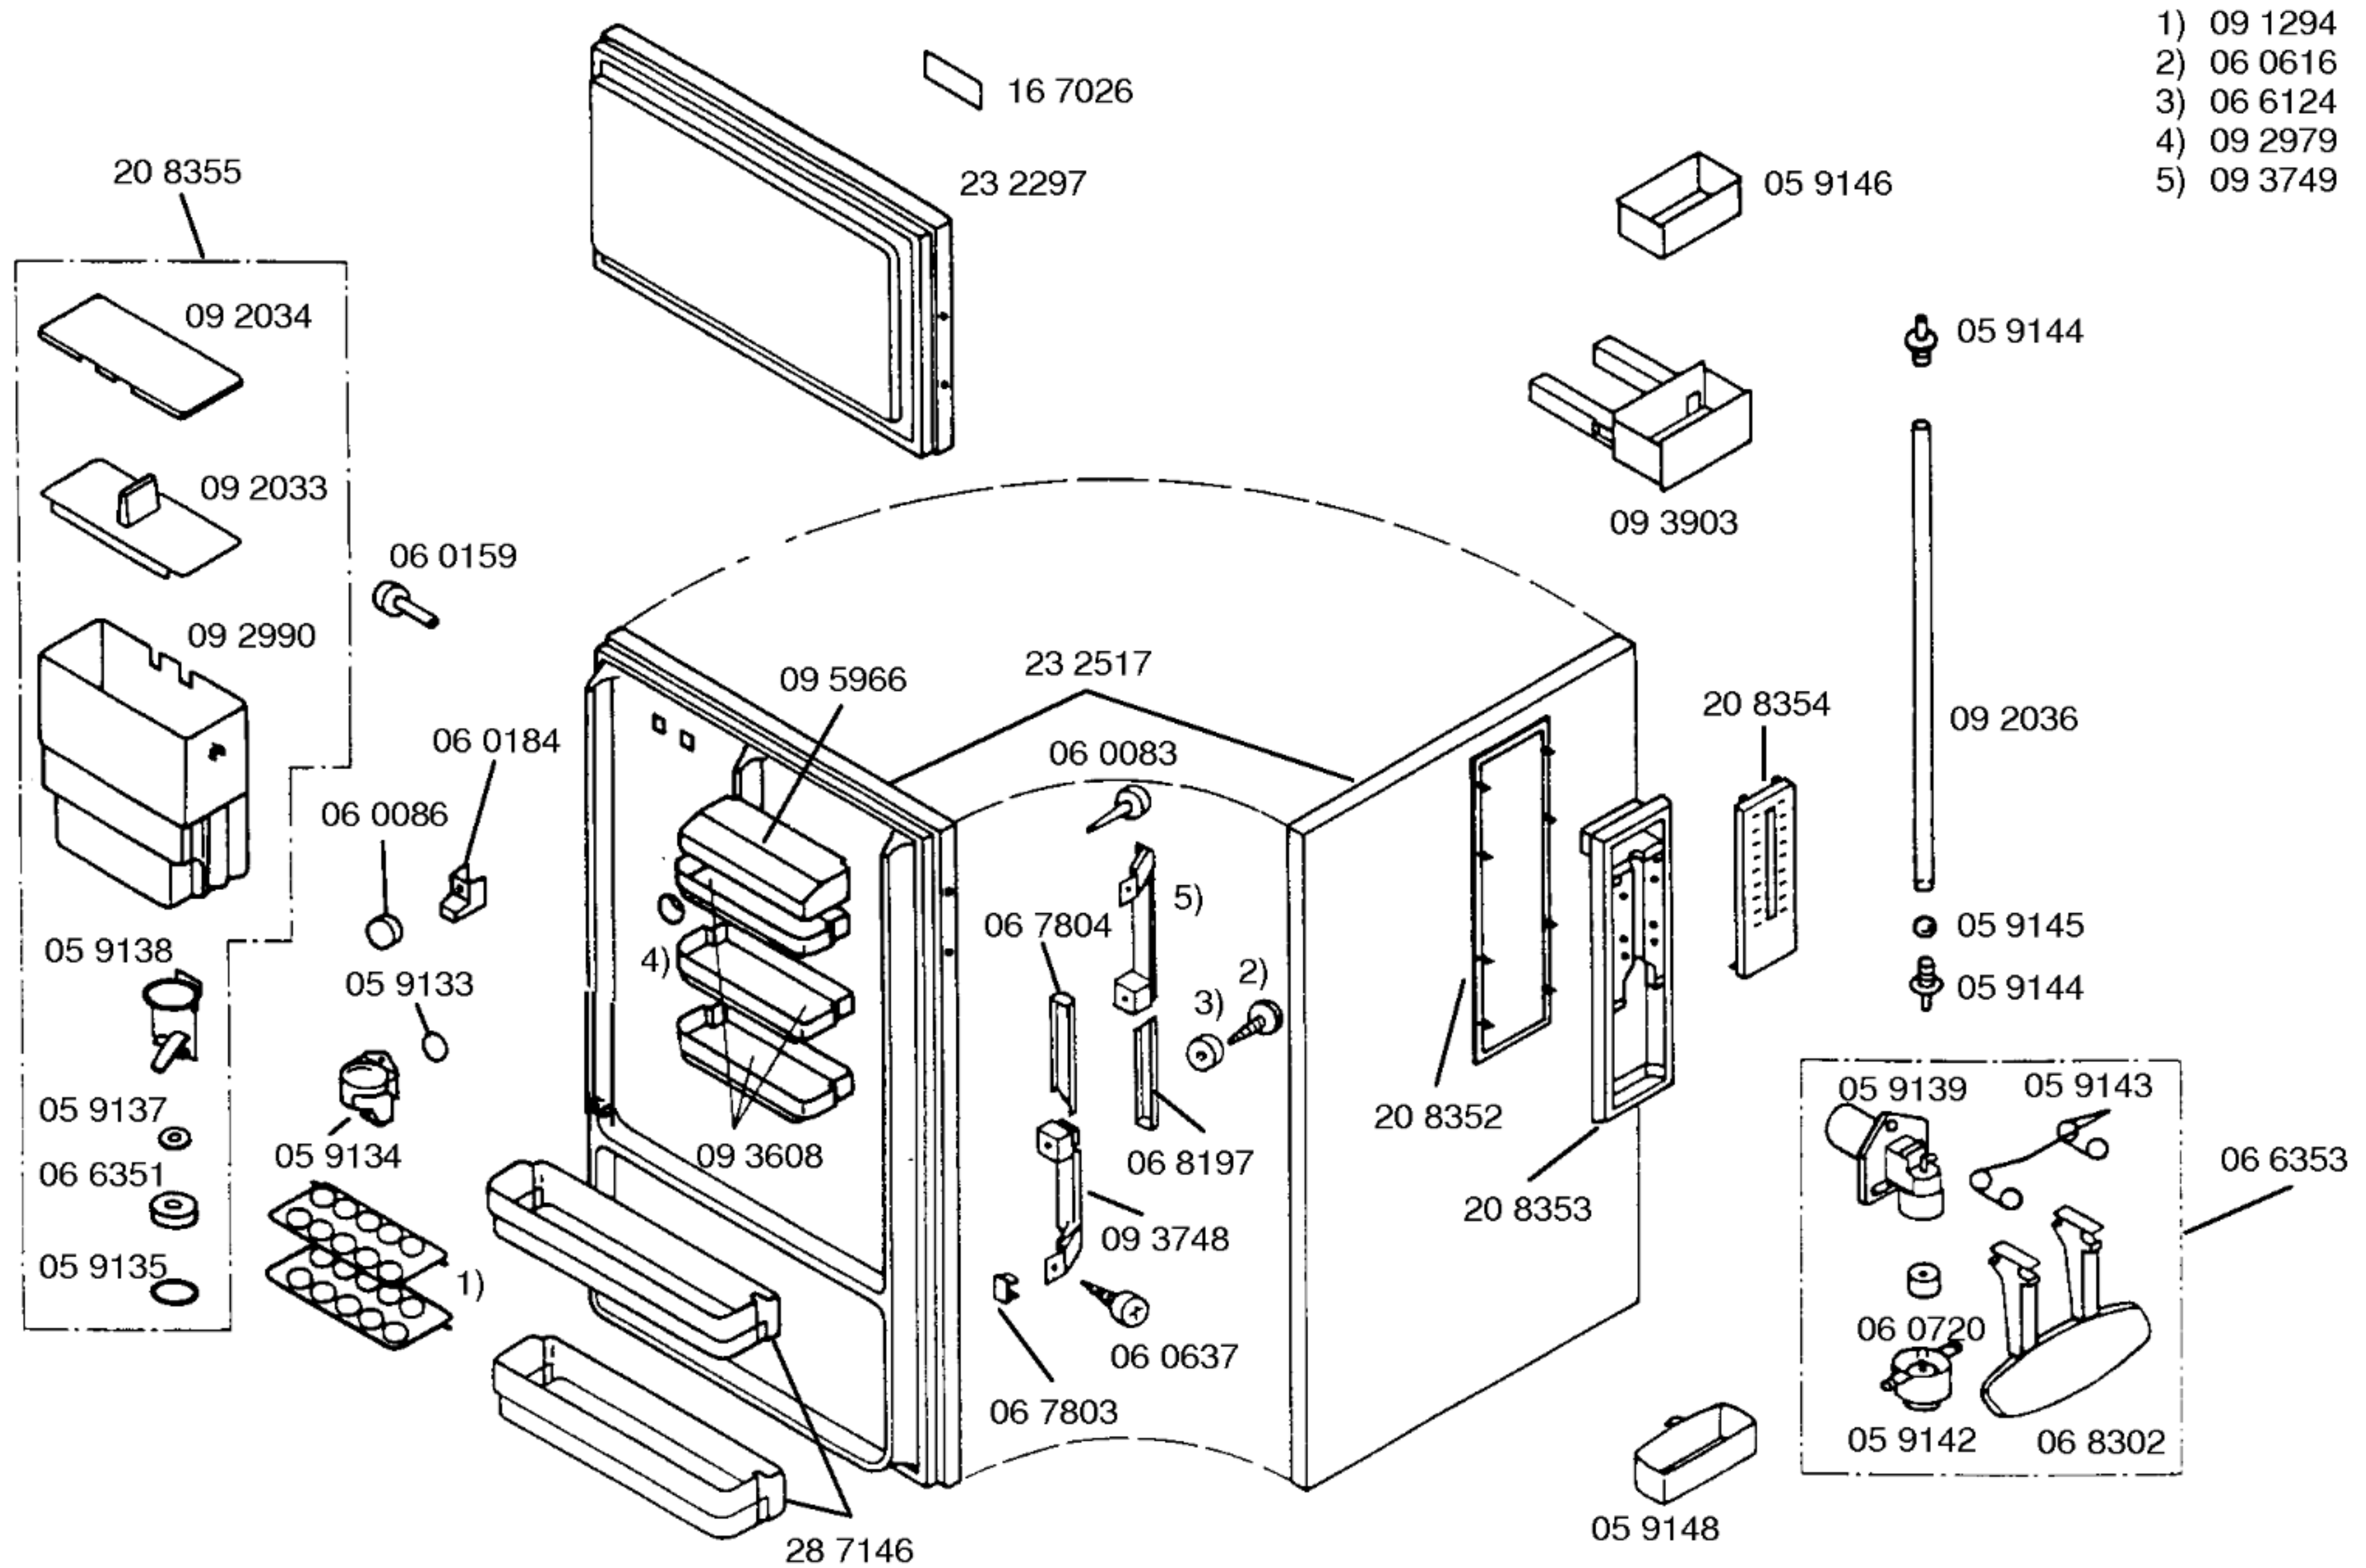

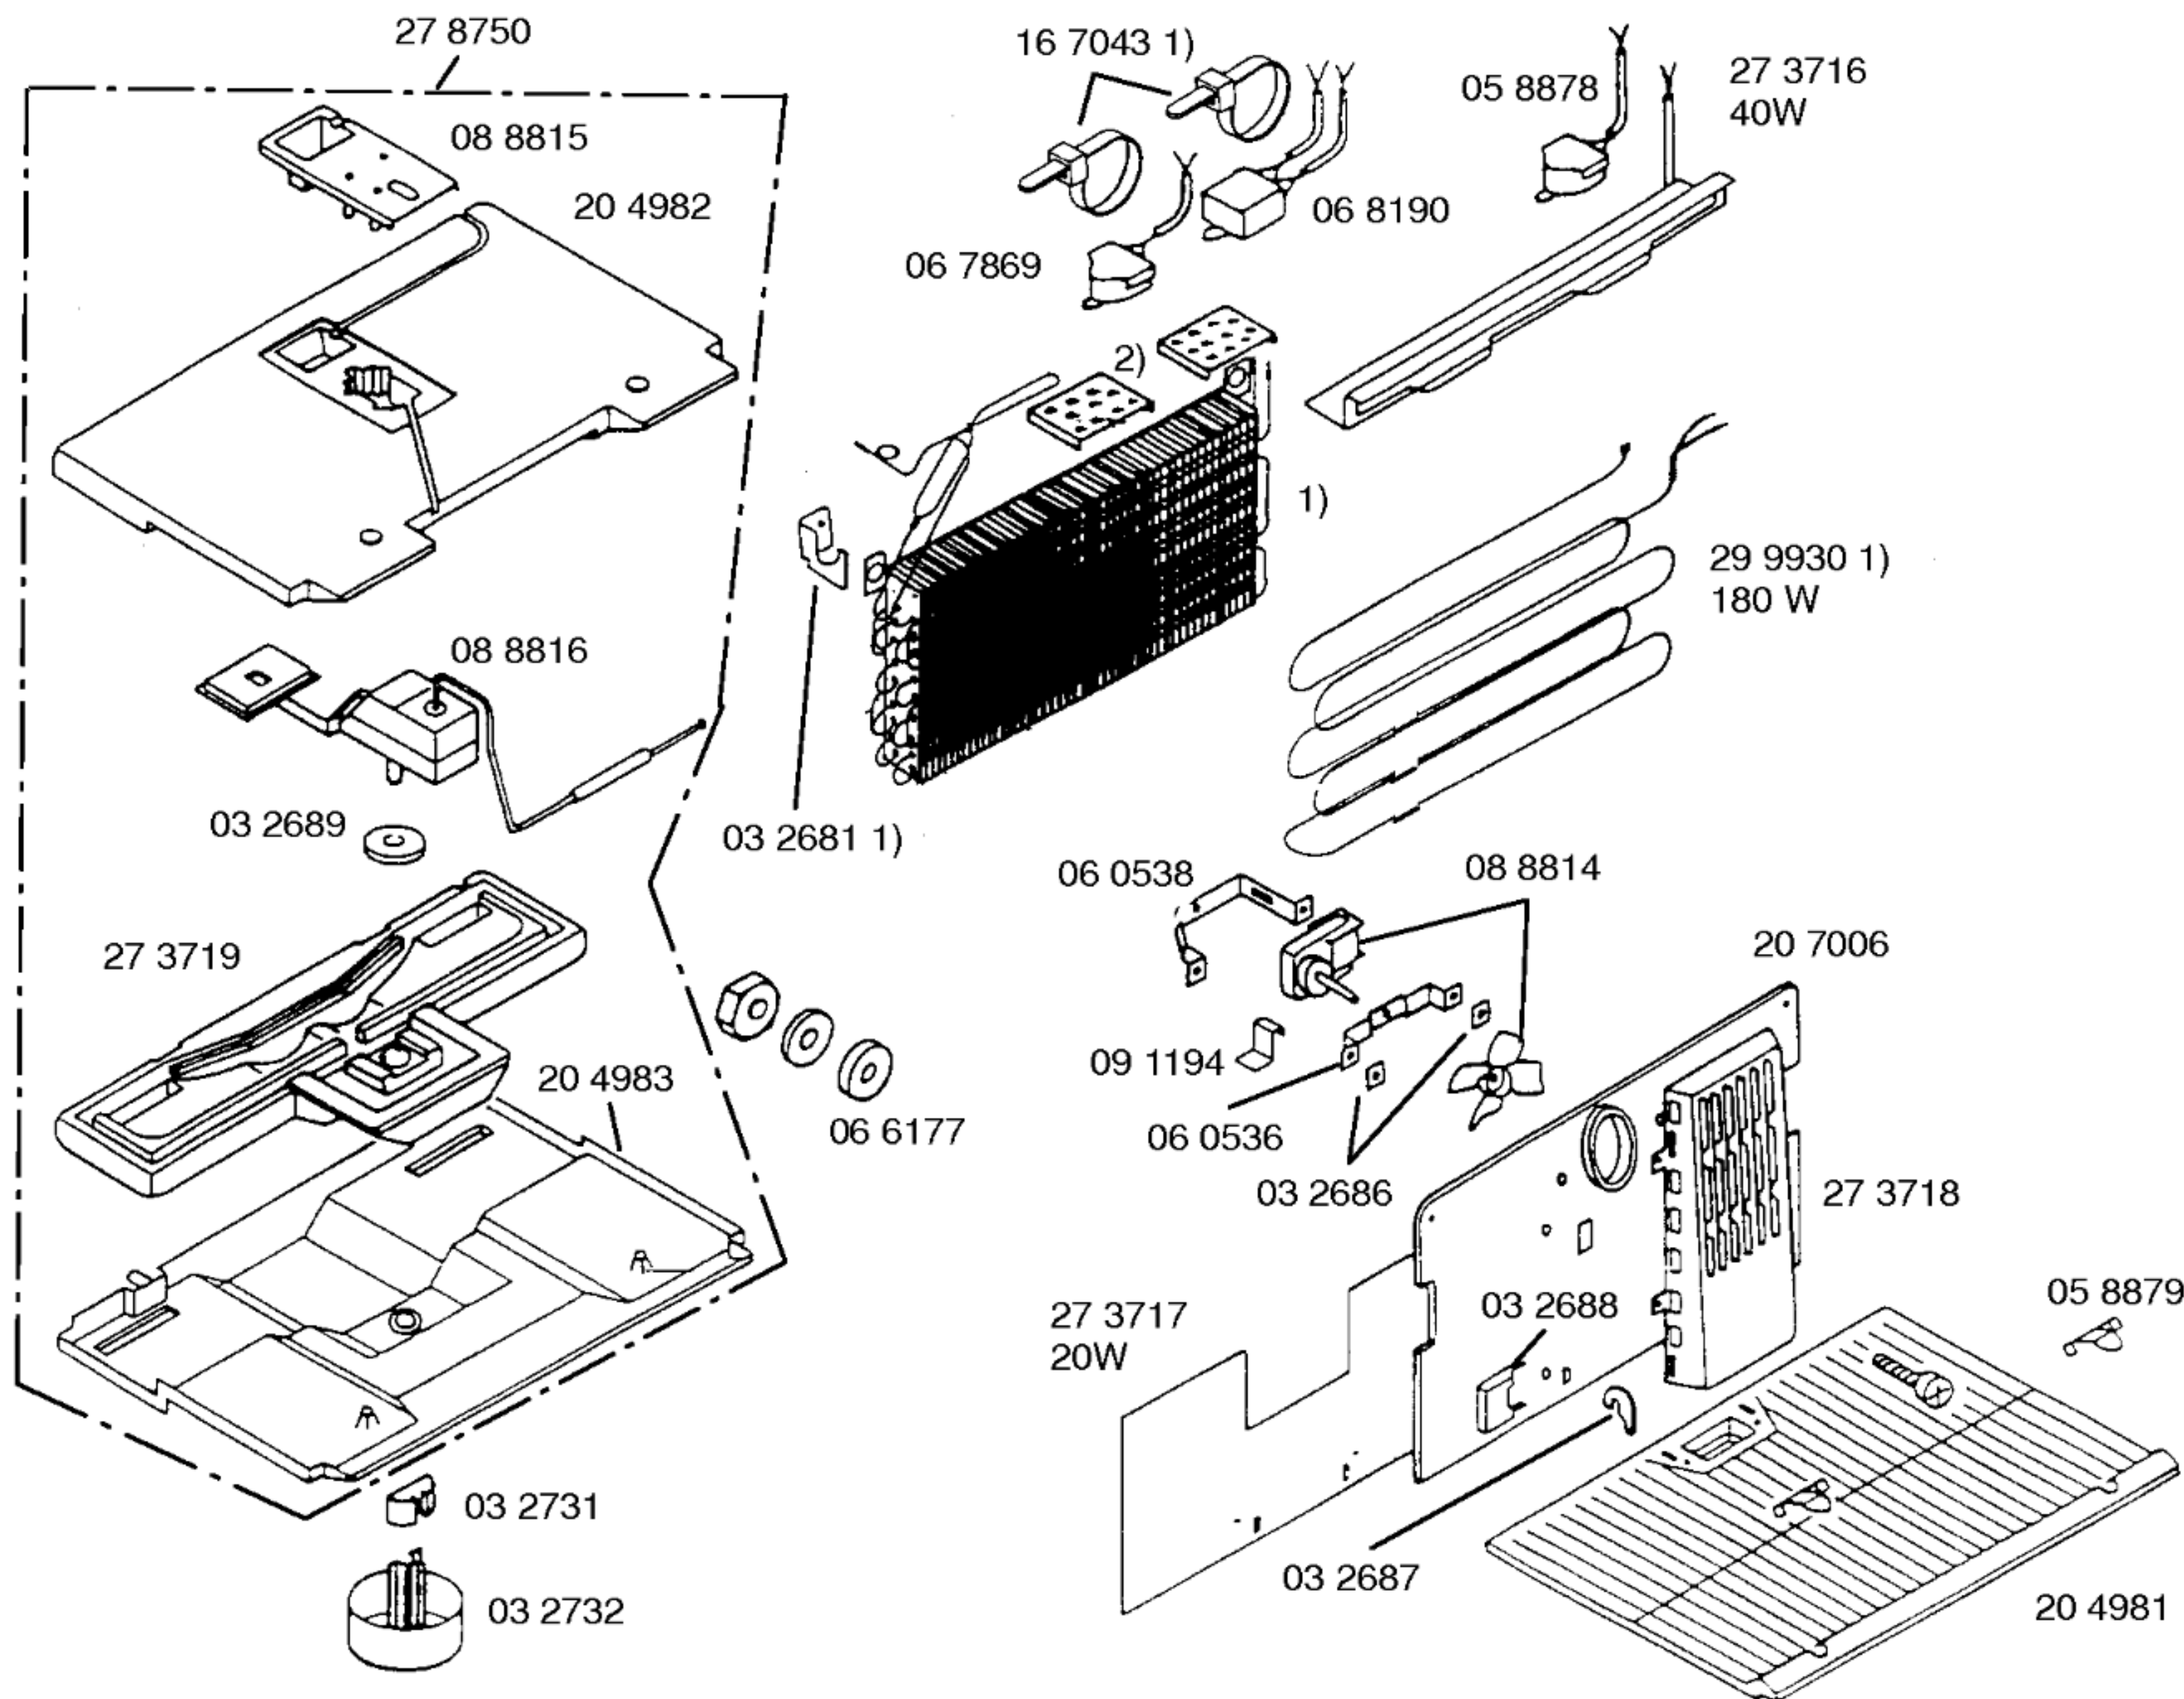

1) 23 4563 kompl.
2) 06 6190

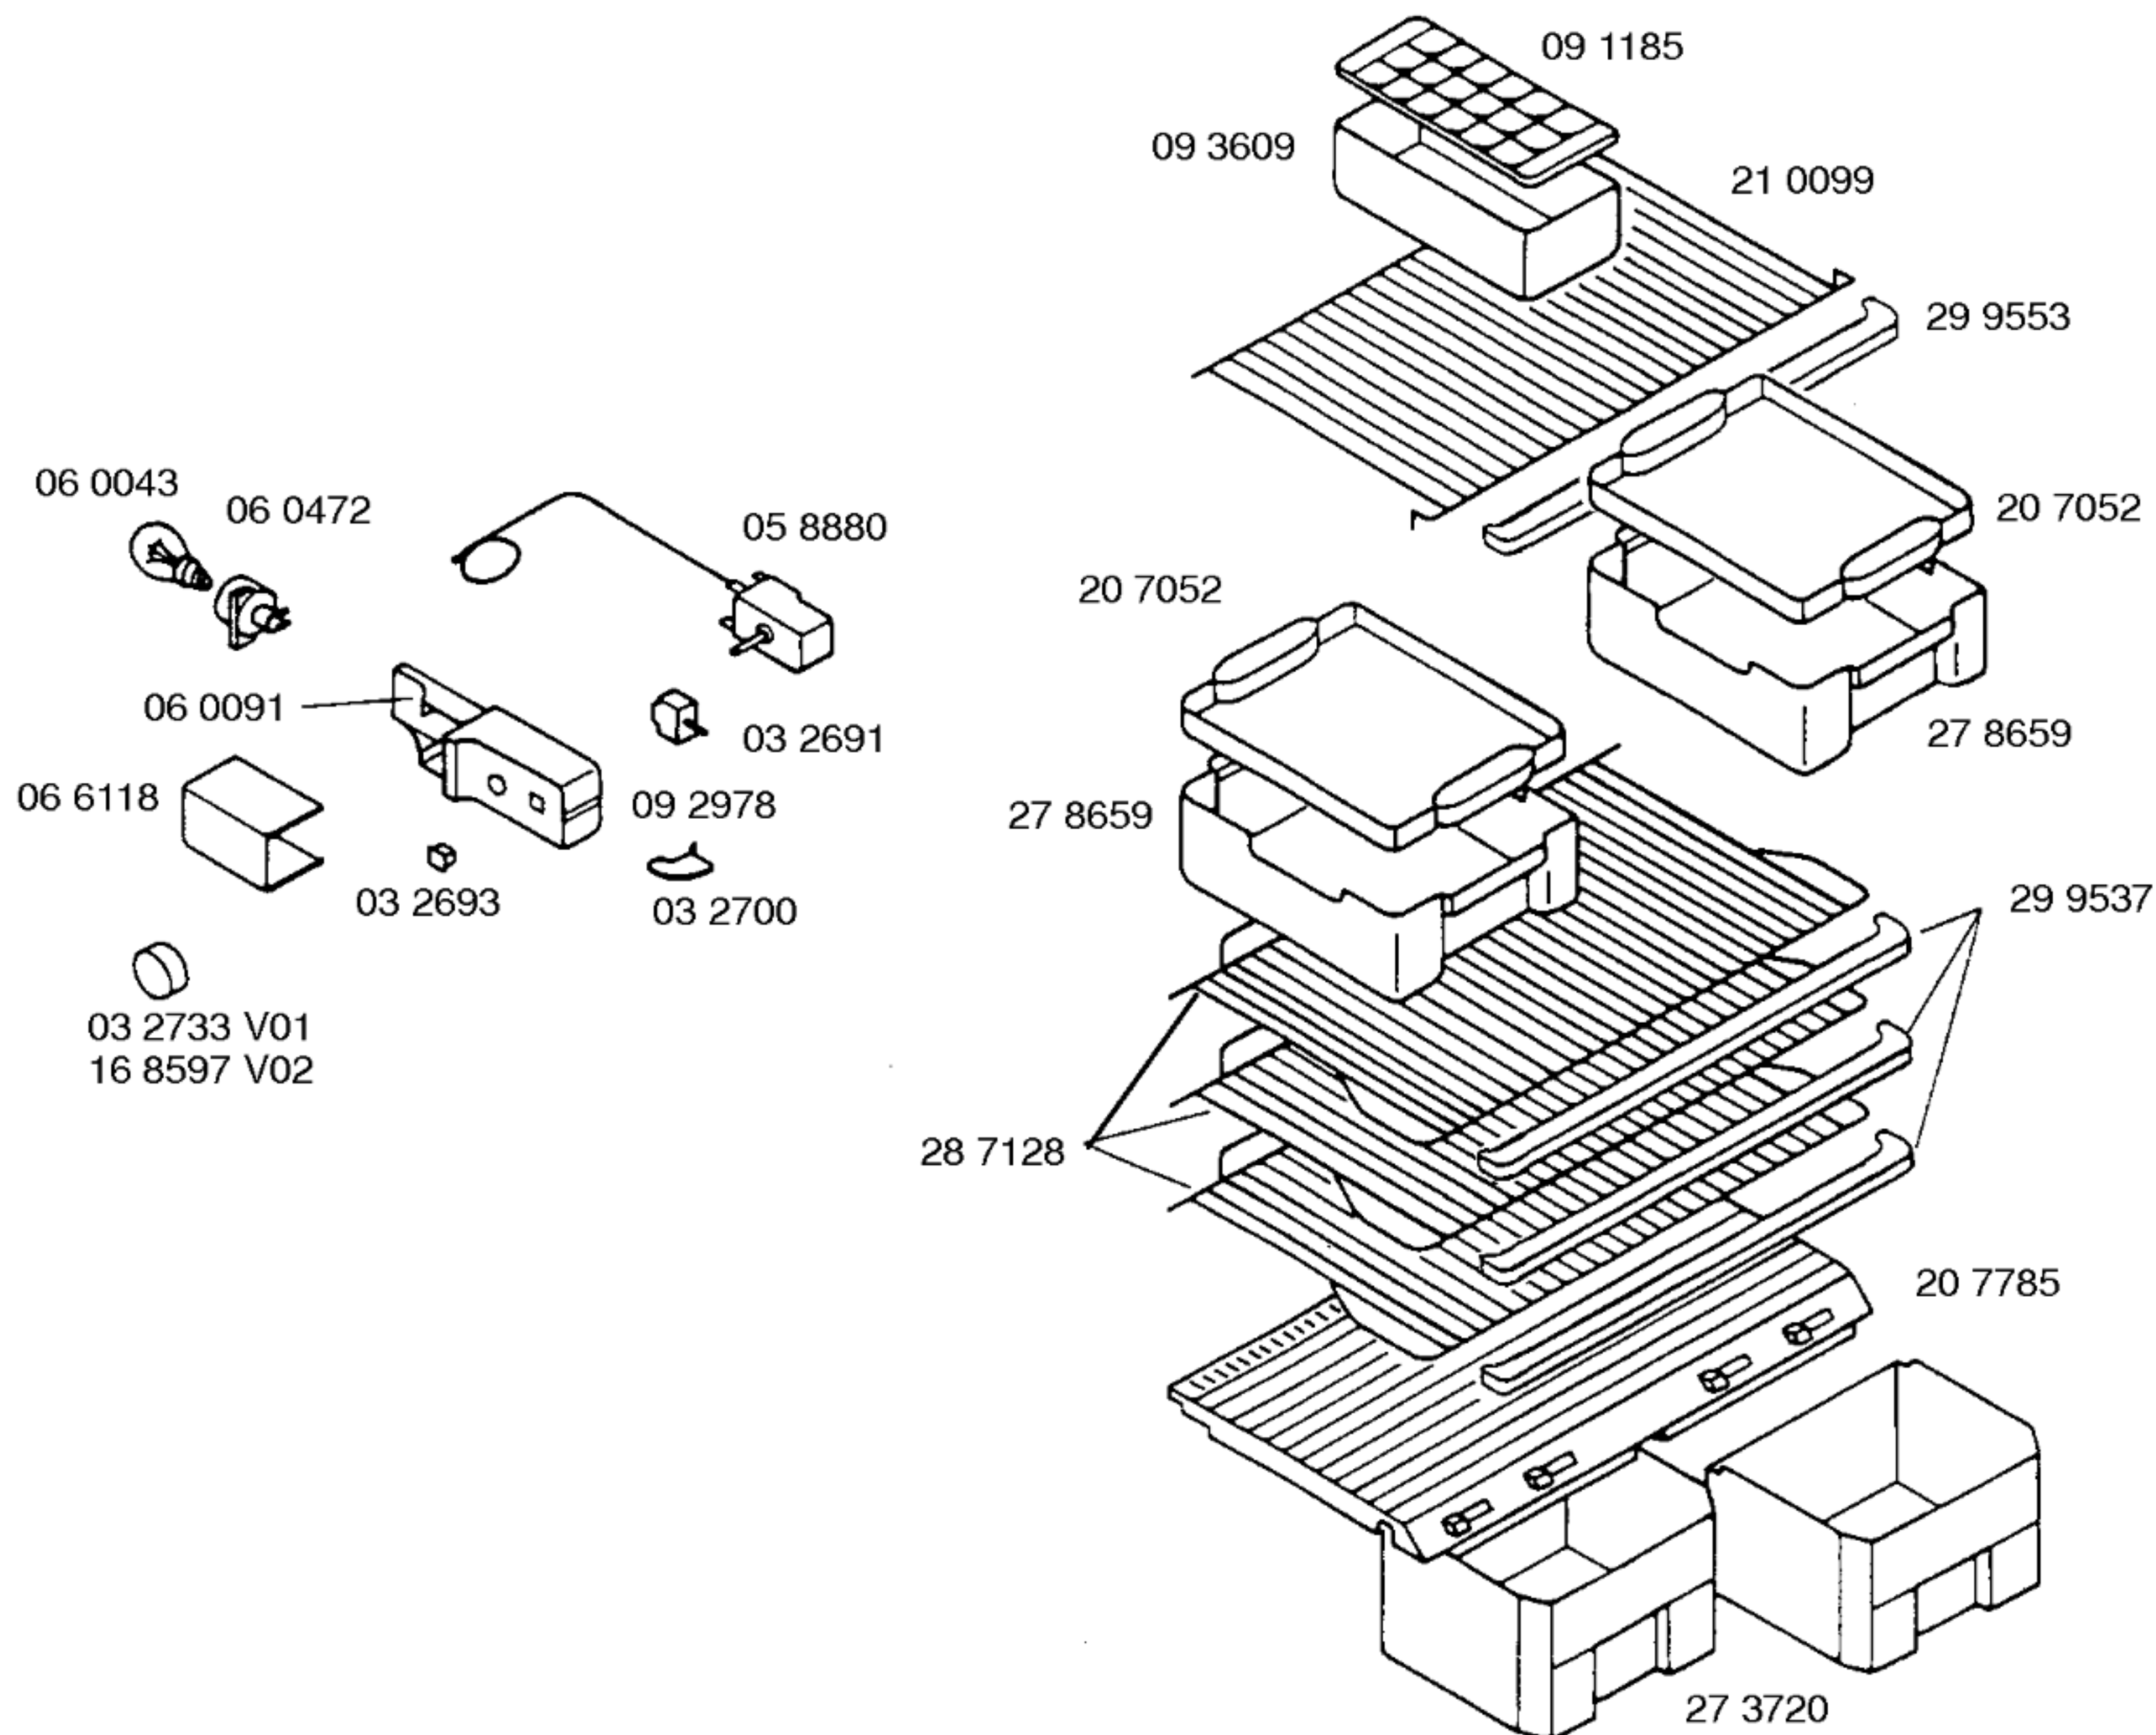

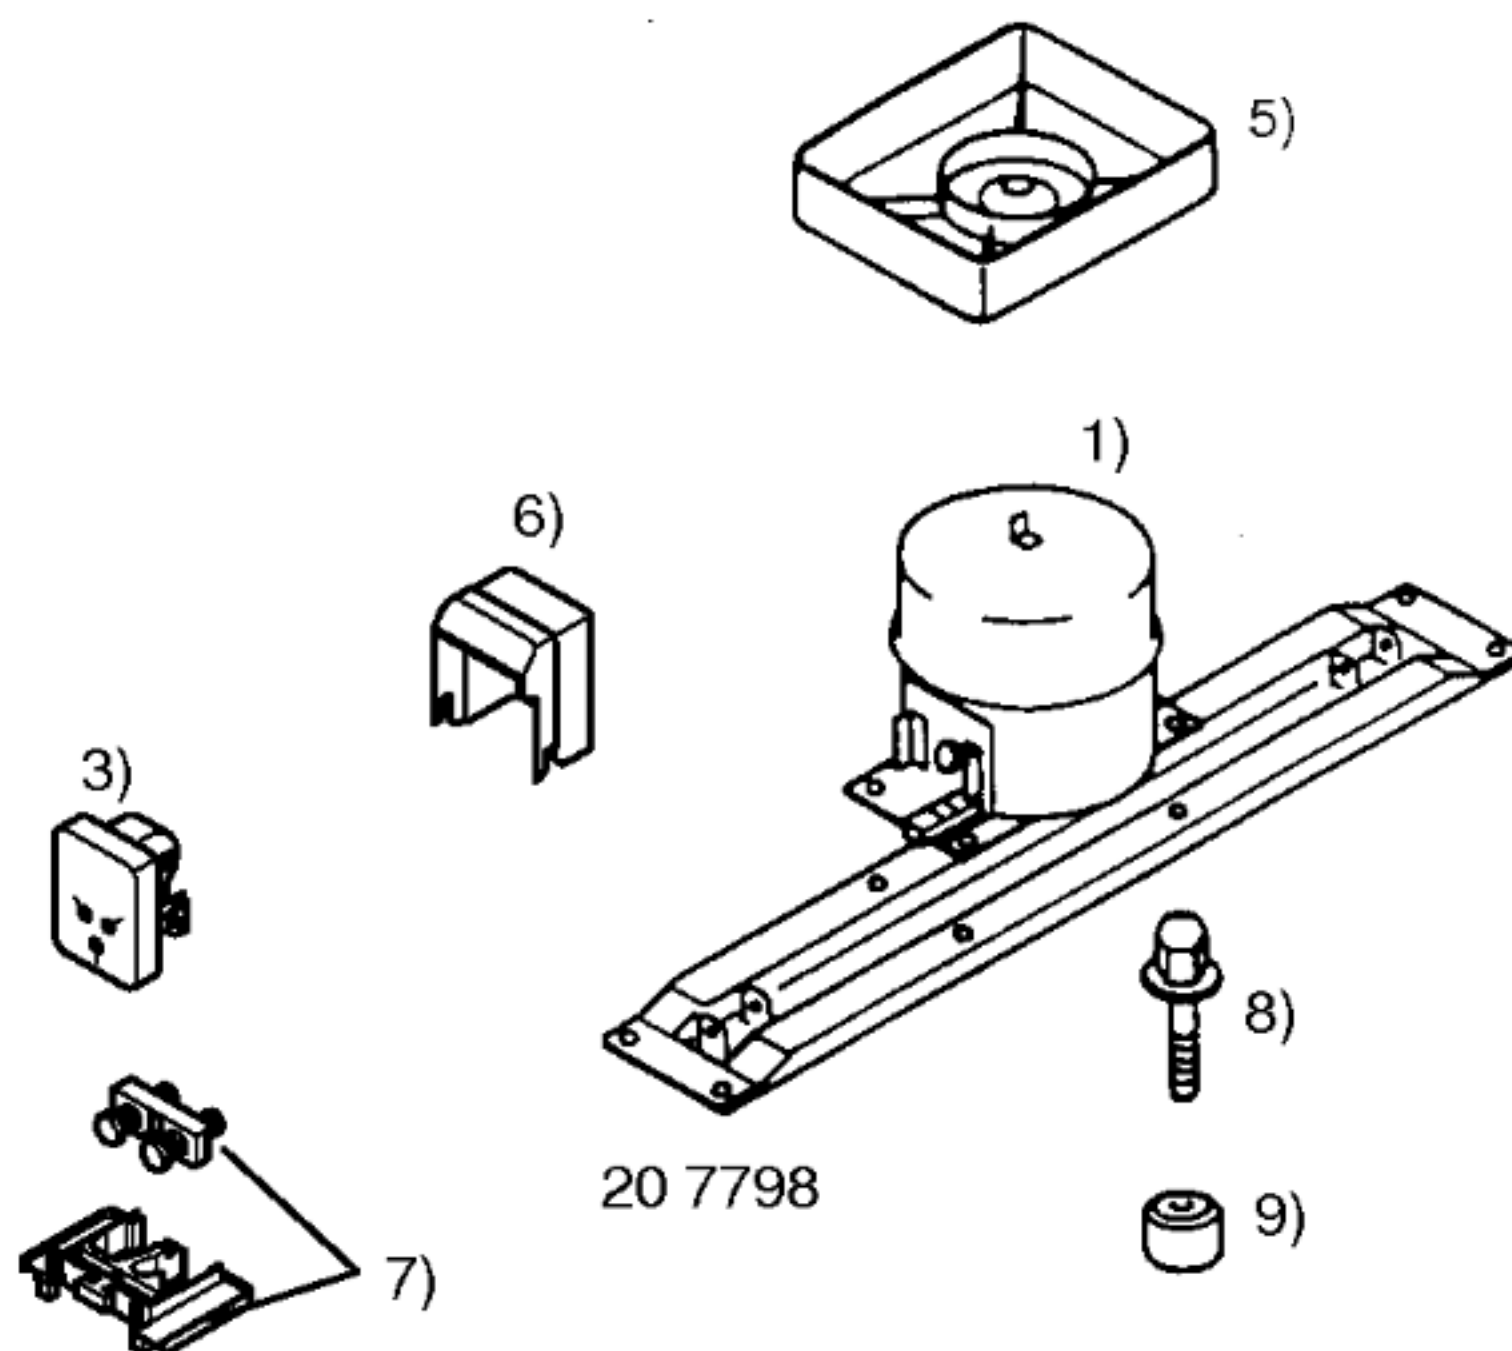

	V01	V02
Pos.	Matsu.	Danfoss
	D91C18RA	NL9F
1	14 1334	14 1745
2		
3	15 3827	15 1055
4		
5	09 1308	26 4460
6		15 1072
7		15 1053
8	06 0013	06 0013
9	06 0182	06 0182
10		
11		
12		

TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS				
Verdichter/Compressor/Compresseur/Compresor		Masushita		Danfoss
Typ/Type/Tipo		D91C18RA		NL9F
Förderleistung/Delivery/Debit/Aspiración l/h		1633		1503
Anlaufstrom/Starting current/Cour.démarrage/Int.arranque A		11,7		11,4
Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm		8,5		11,3
Hi/aux.		21		13,1
Temp.Reyler/Thermostat/Termostato		RANCO		
Typ/Type/Tipo		K57-L2806		
Reglerstellung/Position/Conexión		MAX MIN.		
Schaltwerte/Switching values/		-23° -15°		
Valeurs de commutation/Desconex.		-28° —		
(..abtaven' od)		..alarm'		
Füllmenge/Fill. quantily/Charge/Carga R134a		g	210	
Anschlusswert/Comm. load/Puiss. Connect./Potenc.		W	250	
Heizung/Heater/Chauflage/Resistenc.descong.		Verdampfer	Ablaufrinne	Blende
Widerstand/Resistance/Resistencia		270	1320	2900
Leistung/Power/Puissance/Potencia		180	40	20
Ventilador/Blower/Ventilateur/Ventilador		Verdichter	Verdampfer	
Widerstand/Resistance/Resistencia		350	460	
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance		Ohm	7900	